120W isolated AC-DC converter with ultra-wide, ultra-high 85 - 900VAC input for coalmine





FEATURES

- Specially designed for electrical equipment in coal mining industry
- Ultra-wide 85 900VAC input voltage range
- Industrial grade operating temperature: -25 $^{\circ}{\rm C}$ to +70 $^{\circ}{\rm C}$
- High I/O isolation test voltage of 4000VAC
- High reliability, high efficiency, long lifespan
- Output short circuit, over-current and over-voltage protection
- Immunity, EFT/Surge: ±4KV perf. Criteria B

PVA120-27Bxx series is a special power supply designed for customers who provide electrical equipment for coal mining industry to meet the requirements of safety in providing power supply, easy mounting and technology innovation etc. It features ultra-wide input voltage range from 85 to 900VAC which covers 127/220/380/660VAC used in coal mining industry, high isolation voltage, excellent EMS performance, multiple protections and high efficiency. They are widely used in monitoring and security sectors of coal mining industry.

| Selection Guide | | | | | | |
|--|--------------|---|----------------------------------|---------------------------|--|--|
| Part No.* | Output Power | Nominal Output Voltage and Current (Vo/Io) | Efficiency at 330VAC (%) Typ. | Capacitive Load (µF) Max. | | |
| PVA120-27B24 | 120W | 24V/5A | 82 | 1500 | | |
| PVA120-27B28 | 120.4W | 28V/4.3A | 82 | 1500 | | |
| PVA120-27B35 | 122.5W | 35V/3.5A | 82 | 1000 | | |
| Note: *Use suffix "H" for can be used in harsh working conditions in coal mines (with transient peak voltage). | | | | | | |

| Input Specification | ns | | | | | |
|---------------------|----------------------|-----------|---|------|------|--|
| Item | Operating Conditions | Min. | Тур. | Max. | Unit | |
| Input Voltage Range | | 85 | | 900 | VAC | |
| | 127VAC | | | 2.5 | | |
| Input Current | 330VAC | | - | 1.5 | | |
| | 660VAC | | | 0.8 | Α | |
| Inrush Current | 330VAC | | | 140 | ^ | |
| | 660VAC | | | 280 | | |
| | 900VAC | | | 360 | | |
| External Input Fuse | | (brand: A | 1000VAC/6A, required (brand: Adler models: A851600b00 base models: BH300) | | | |
| Hot Plug | | | Unavailable | | | |

| Output Specificatio | ns | | | | | |
|--------------------------|----------------------|-----------------------------------|----------------|-----------------|--------------|--|
| Item | Operating Conditions | Min. | Тур. | Max. | Unit | |
| Output Voltage Accuracy | All load range | | ±2 | | | |
| Line Regulation All load | | | ±0.5 | | % | |
| Load Regulation | 0% - 100% load | - | ±1 | | | |
| Ripple & Noise* | | 100 | 200 | mV | | |
| Temperature Coefficient | | | ±0.02 | | %/ °C | |
| Short Circuit Protection | | Hiccup, continuous, self-recovery | | | | |
| Over-current Protection | | } | ≥110%lo, hiccu | up, self-recove | y | |
| | 24V output | | ≤35VDC | | | |
| Over-voltage Protection | 28V output | | ≤40VDC | | | |
| | 35V output | | ≤45VDC | | | |
| Minimum Load | | 0 | | | | |

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.




| Hold-up Time | Room temperature, | 330VAC input | _ | 40 | 40 | |
|--|-------------------|--------------|---|----|----|----|
| | Full load | 660VAC input | _ | 80 | | ms |
| Note: * The "Tip and barrel method" is used for ripple and noise test, please refer to AC-DC Converter Application Notes for specific information. | | | | | | |


| General Specifications | | | | | | | |
|----------------------------------|-----------------|--|---------------------|------|------|--------------|--|
| Item | | Operating Conditions | Min. | Тур. | Max. | Unit | |
| Isolation | Input - output | Electric Strength Test for 1min., leakage current ≤3mA | 4000 | | | VAC | |
| Insulation Res | sistance | 500VDC | ≥50x10 ⁶ | | Ω | | |
| Operating Te | mperature | | -25 | | +70 | °C | |
| Storage Temperature | | | -40 | | +85 | | |
| Storage Hum | torage Humidity | | | | 95 | %RH | |
| Power Derating | | -25℃ to -10℃ | 2.6 | | | %/ °C | |
| | | +50°C to +70°C | 2.0 | - | | | |
| | | 85VAC-100VAC | 3.3 | - | | | |
| | | 850VAC-900VAC | 1.0 - | | | %/VAC | |
| Switching Frequency | | | - | 65 | | kHz | |
| MTBF MIL-HDBK-217F@25°C ≥300,000 | | ≥300,000 h | 1 | | | | |

| Mechanical Specifications | | | | | |
|---------------------------|---------------------------|--|--|--|--|
| Dimensions | 170.00 x 107.00 x 52.00mm | | | | |
| Weight | 530g(Typ.) | | | | |
| Cooling Method | Free air convection | | | | |


| Electromagnetic Compatibility (EMC) | | | | | | | |
|-------------------------------------|-------|-----------------|---------------------------------------|------------------|--|--|--|
| Immunity | ESD | IEC/EN61000-4-2 | Contact ±6KV | perf. Criteria B | | | |
| | RS | IEC/EN61000-4-3 | 10V/m | perf. Criteria A | | | |
| | EFT | IEC/EN61000-4-4 | ±4kV | perf. Criteria B | | | |
| | Surge | IEC/EN61000-4-5 | line to line ±2KV/line to ground ±4KV | perf. Criteria B | | | |
| | CS | IEC/EN61000-4-6 | 10Vr.m.s | perf. Criteria A | | | |


Product Characteristic Curve

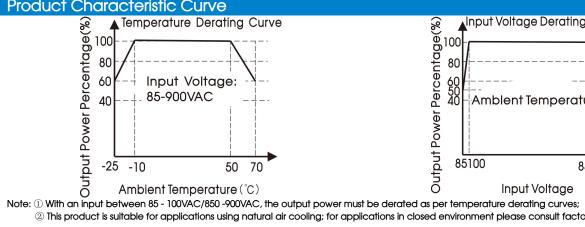




② This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.





Design Reference

1. Typical application




| Model | FUSE | C1 | C2 |
|--------------|---|-----|------|
| PVA120-27Bxx | 1000VAC/6A, required (brand: Adler models: A851600b00 base models: BH300) | 1uF | 10uF |

Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise.

2. Trim Function for Output Voltage Adjustment (open if unused)



TRIM resistor connection (dashed line shows internal resistor network)

Calculating Trim resistor values:

up:
$$R_T = \frac{\alpha R_2}{R_2 - \alpha}$$
 -R3 $\alpha = \frac{Vref}{Vot - Vref}$ R1 RT = Trim Resistor value; $\alpha = Self$ -defined parameter; down: $R_T = \frac{\alpha R_1}{R_1 - \alpha}$ -R3 $\alpha = \frac{Vot - Vref}{Vref}$ R2

| Vout | R1(K Ω) | R2(K Ω) | R3(K Ω) | Vref(V) | Vot(V) |
|------|----------------|----------------|----------------|---------|--|
| 24V | 13.64 | 1.57 | 1 | 2.5 | B |
| 28V | 16.35 | 1.59 | 1 | 2.5 | Resulting trimmed output voltage, range ≤ ±10% |
| 35V | 19.82 | 1.5 | 1 | 2.5 | Tonage/Tange \ _10% |

3. For more information Please find the application notes on www.mornsun-power.com

Function

PE AC(L)

AC(N)


Trim


-Vo

+Vo

Dimensions and Recommended Layout



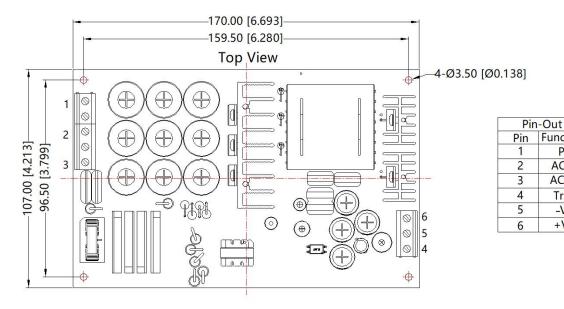

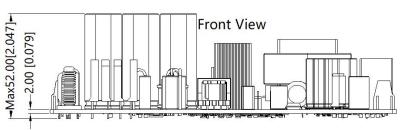

Note: Unit: mm[inch] Wire range: 24~12AWG Tightening torque: Max 0.4N·m General tolerances: ±1.00[±0.039]

The layout of the device is for reference only, please refer to the actual product

Note:

- 1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220073;
- 2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75% with nominal input voltage and rated output load;
- 3. All index testing methods in this datasheet are based on our company corporate standards;
- 4. We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by aualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com