

1W isolated DC-DC converter Fixed input voltage, regulated single output



FEATURES

- Continuous short-circuit protection
- No-load input current as low as 8mA
- Operating ambient temperature range: -40°C to **+85**℃
- High efficiency up to 73%
- I/O isolation test voltage 1.5k VDC
- Industry standard pin-out

Patent Protection RoHS

IB05_LD-R3 series is specially designed for distributed power supply systems where an isolated voltage is required. They are suitable for occasions of: pre-interference isolation, ground interference elimination, pure digital circuit, voltage isolation conversion, general low frequency analog circuit, relay drive circuit, etc.

Circuit Protection

Selection	Guide					
		Input Voltage (VDC)	C) Output		Full Load	Capacitive
Certification	Part No.	Nominal (Range)	Voltage (VDC)	Current (mA) Max./Min.	Efficiency (%) Load (µF Min./Typ. Max.	
	IB0505LD-W75R3	5	5	150/15	66/70	2400
	IB0505LD-1WR3	(4.75-5.25)	5	200/20	69/73	2400

Input Specifications					
Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	5VDC input		274/8	290/	
Reflected Ripple Current*			15		mA
Input Filter			Capaci	ance filter	
Hot Plug			Unav	ailable	
Note: * Refer to DC-DC Converter Applie	cation Notes for detailed description of reflected ripple current te	est method.			

Output Specification	IS				
Item	Operating Conditions	Min.	Typ.	Max.	Unit
Voltage Accuracy				±3	
Linear Regulation	Input voltage change: ±1%			±0.25	%
Load Regulation	10%-100% load			±2	
Ripple & Noise*	20MHz bandwidth		50	100	mVp-p
Temperature Coefficient	100% load		±0.02		%/ ℃
Short-circuit Protection		0	continuous,	self-recove	əry
Noto, * The "marginal age lo" metho	ad is used for Bipple and Neise test plagse refer to DC DC (Convertor Application Notes fo		amantian	

Note: * The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specificatio	Ins				
Item	Operating Conditions	Min.	Тур.	Max.	Unit
Isolation	Input-output electric strength test for 1 minute with a leakage current of 1mA max.	1500			VDC
Insulation Resistance	Input-output resistance at 500VDC	1000			MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V		20		pF
Operating Temperature	Derating when operating temperature ${\geqslant}71^\circ\!\!\mathbb{C}$ (see Fig.1)	-40		85	
Storage Temperature		-55		125	°C
Case Temperature Rise	Τα=25 ℃		25		

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

DC/DC Converter IB05_LD-R3 Series


MORNSUN®

Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds			300	°C
Storage Humidity	Non-condensing	5		95	%RH
Vibration		10-150H	z, 5G, 0.75r	nm. along >	K, Y and Z
Switching Frequency	100% load, nominal input voltage		300		kHz
MTBF	MIL-HDBK-217F@25°C	3500			k hours


Mechanical Specifications				
Case Material	Black plastic; flame-retardant and heat-resistant (UL94-V0)			
Dimensions	20.00 x 10.00 x 7.00mm			
Weight	2.4g(Typ.)			
Cooling Method	Free air convection			

Electromagnetic Compatibility (EMC)				
Emissions	CE	CISPR32/EN55032 CLASS B (see Fig.3 for recommended circuit)		
Emissions	RE	CISPR32/EN55032 CLASS B (see Fig.3 for recommended circuit)		
Immunity	ESD	IEC/EN61000-4-2 Air ±8kV, Contact ±6kV perf. Criteria B		

Typical Characteristic Curves

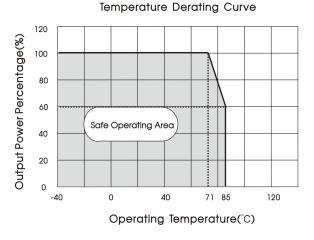



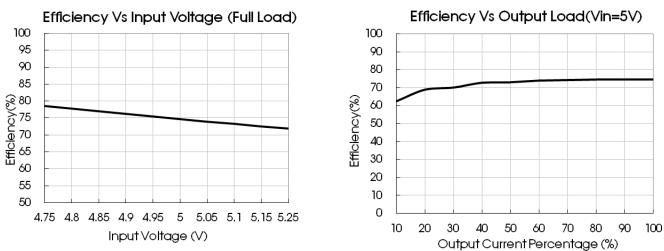

MORNSUN Guangzhou Science & Technology Co., Ltd.

MORNSUN®

2021.10.29-A/0 Page 2 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

DC/DC Converter

IB05_LD-R3 Series

MORNSUN®

Design Reference

1. Typical application circuit

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig. 2.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.




Table 1: Recom	mended input	t and output c	apacitor value	∋s
Vin	Cin	Vo	Cout	

vin	Cin	VO	Cour
5VDC	2.2µF/25V	5VDC	4.7µF/16V

2. EMC compliance circuit

MORNSUN[®]

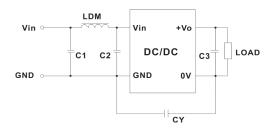



Table 2: Recommended EMC filter values

	C1/C2	4.7µF /50V
Emissions	CY	100pF /2kVDC
Emissions	C3	Refer to the Cout in table 1
	LDM	6.8µH

Fig. 3

3. For additional information please refer to DC-DC converter application notes on <u>www.mornsun-power.com</u>.

Dimensions and Recommended Layout

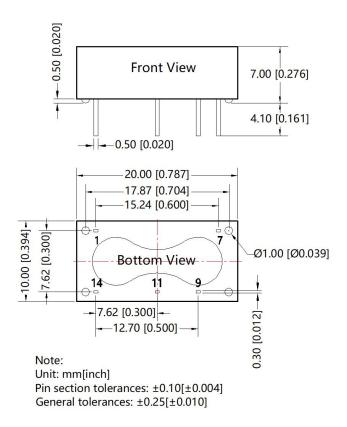

THIRD ANGLE PROJECTION

		<u> </u>
14	11	9
	Top Viev	
1 (F	CB layo	ut) 7

Note: Grid 2.54*2.54mm

Pin	Mark
1	GND
7	NC
9	+Vo
11	0V
14	Vin

NC: No connection

MORNSUN Guangzhou Science & Technology Co., Ltd.

2021.10.29-A/0 Page 3 of 4



Notes:

- 1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58200009;
- 2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- 3. The maximum capacitive load offered were tested at input voltage range and full load;
- 4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
- 5. All index testing methods in this datasheet are based on our company corporate standards;
- 6. We can provide product customization service, please contact our technicians directly for specific information;
- 7. Products are related to laws and regulations: see "Features" and "EMC";
- 8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. ChinaTel: 86-20-38601850Fax: 86-20-38601272E-mail: info@mornsun.cnwww.mornsun-power.com

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2021.10.29-A/0 Page 4 of 4