MORNSUN[®]

50W, specific power supply for power grid



FEATURES

- Specific power supply designing for smart grid
- Ultra-wide 85 305VAC and 88 430VDC input voltage range
- Ultra-wide operating ambient temperature range:
 -40°C to +85°C
- High reliability, low output ripple & noise
- Immunity meets electricity standard Level 4
- Meets impulse voltage requirements of 1.2/50us 5KV
- Safety according to UL/IEC62368

LO50-23BxXE series is a special power supply design for the smart grid industry that meets the power industry standards. It features AC input and at the same time accepts DC input voltage, with ultra-wide input voltage range, wide operating temperature range, high reliability, and high isolation. EMC and safety specifications meet IEC/EN61000-4, CISPR32/EN55032, UL/EN/IEC62368 standards. It is suitable for smart grid occasions with poor power quality and high reliability requirements, such as smart power transmission and substations. It also can be used in microcomputer protection equipment, bus voltage protection equipment or equipment with high reliability requirements that require 110VDC input voltage.

Selection Guide							
Certification	Part No.	Output Power	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range ADJ (V)	Efficiency at 230VAC (%) Typ.	Capacitive Load (µF) Max.	
	LO50-23B03E	33W	3.3V/10A	2.97-3.63	84	20000	
	LO50-23B05E	50W	5V/10A	4.5-5.5	86	20000	
	LO50-23B09E	50.4W	9V/5.6A	8.1-9.9	86	10000	
	LO50-23B12E	50.4W	12V/4.2A	10.8-13.2	86	8000	
EN/UKCA	LO50-23B15E	51W	15V/3.4A	13.5-16.5	86	4000	
-	LO50-23B24E	50.4W	24V/2.1A	21.6-26.4	87	2000	
	LO50-23B27E	51.3W	27V/1.9A	24.3-29.7	88	2000	
	LO50-23B48E	52.8W	48V/1.1A	43.2-52.8	89	1000	

Input Specifications						
Item	Operating Conditions	Min.	Typ.	Max.	Unit	
	AC input	85		305	VAC	
Input Voltage Range	DC input	88		430	VDC	
Input Frequency		47		63	Hz	
la su d Oursend	115VAC			1.2		
Input Current	230VAC			0.8	•	
lawsk Oswant	115VAC		20		A	
Inrush Current	230VAC		40			
Leakage Current	277VAC		0.5mA RMS max.			
Hot Plug			Unavailable			

Output Specifications					
Item	Operating Conditions	Min.	Тур.	Max.	Unit
Output Voltage Accuracy	0% - 100% load		±2		
Line Regulation	Rated load		±0.5		%
Load Regulation	230VAC		±l		
Ripple & Noise*	100MHz bandwidth (peak-to-peak value)			150	mV
Stand-by Power Consumption				0.5	W
Short Circuit Protection Hiccup, continuous, self-recover			overy		

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2022.03.01-A/2

Page 1 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

AC/DC Converter LO50-23BxxE Series

MORNSUN®

Over-current Protection			\geq 110%lo, self-recovery		
	3.3VDC output	≤5.5V	Output voltage clamp, hicc		
	5VDC output	≤7.5V			
	9VDC output	≤13.5V			
Ourseller Destantion	12VDC output	≤16V			on blocun
Over-voltage Protection	15VDC output	≤21V			np, niecup
	24VDC output	≪32V			
	27VDC output	≪35V			
	48VDC output	≪60V	-		
Minimum Load		0			%
Start-up Delay Time				500	ms
11-1-1 · · · · Time -	115VAC input, lo=100%		28		-
Hold-up Time	230VAC input, lo=100%		150		ms

Note: "The "Tip and barrel method" is used for ripple and noise test, with a 0.1 uf ceramic capacitor & 100 uf parallel capacitor, please refer to AC-DC Converter Application Notes for specific information.

General Spe		On eventing: Consolitions	Min	Ti me	Many	Linet	
Item		Operating Conditions	Min.	Тур.	Max.	Unit	
Isolation	Input-output	Electric Strength Test for 1min., leakage current <10mA	4000				
	Input-PE	Electric Strength Test for 1min., leakage current <10mA	2000			VAC	
	Output-PE	Electric Strength Test for 1min., leakage current <20mA	500				
	Input-output						
Insulation Resistance	Input-PE	500VDC	50			MΩ	
Reductance	Output-PE						
Operating Temper	ature		-40		+85	°C	
Storage Temperatu	ILO		-40		+105	C	
Altitude					5000	m	
Switching Frequency				65		kHz	
		-40 ℃ to -25℃	3.33				
	Natural air cooling	+50°C to +70°C	2.5			%/° C	
		+70°C to +85°C	0.66				
	Forced cooling	+60°C to +70°C	3				
Power Derating	wind speed≥ 0.7m/s	+70°C to +85°C	1.33				
		85VAC - 100VAC	1.33			%/VAC	
		277VAC - 305VAC	0.72			/0/ VAC	
		2000m-5000m	5			%/Km	
Safety Standard				EN62368-1, BS EN 62368-1 (Report); Design refer to UL/IEC62368-1			
Safety Class			CLASS I	CLASS I			
MTBF			MIL-HDBK-217	MIL-HDBK-217F@25°C >300,000 h			
		+25°C	≥130 x 10 ³ h	≥130 x 10 ³ h			
	230VAC	+50°C	≥70 x 10 ³ h	≥70 x 10³ h			
Designed life		+70°C	≥44 x 10³ h	≥44 x 10 ³ h			
		+85 ℃	>29 x 10 ³ h				

Mechanical Specifications				
Dimension 132.00 x 50.00 x 27.10 mm				
Weight	145g (Typ.)			
Cooling method	Free air convection			

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

Page 2 of 5


MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

^{2022.03.01-}A/2

MORNSUN[®]

Electron	Electromagnetic Compatibility (EMC)						
F	CE	CISPR32/EN55032	CLASS B				
Emissions	RE	CISPR32/EN55032	CLASS A				
	ESD	IEC/EN61000-4-2	Contact ±8KV/ Air ±15KV	Perf. Criteria B			
	RS	IEC/EN61000-4-3	10V/m	Perf. Criteria A			
	EFT	IEC/EN61000-4-4	±4KV	Perf. Criteria B			
Immunity	Surge	IEC/EN61000-4-5	Line to line ±2KV/ line to ground ±4KV	Perf. Criteria B			
	CS	IEC/EN61000-4-6	10 Vr.m.s	Perf. Criteria A			
	Voltage dips, short interruption and voltage variations	IEC/EN61000-4-11	100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods	Perf. Criteria B			

Product Characteristic Curve

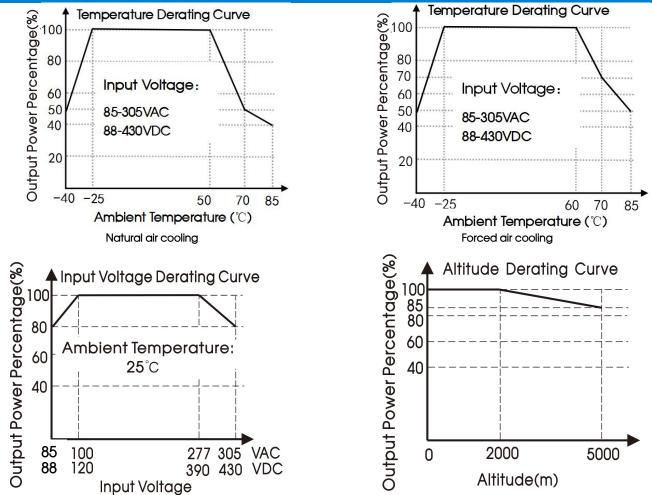

Note: 1) With an AC input between 85-100VAC/277-305VAC and a DC input between 88-120VDC/390-430VDC, the output power must be derated as per temperature derating curves;

2 This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

MORNSUN®


MORNSUN Guangzhou Science & Technology Co., Ltd.

2022.03.01-A/2 Page 3 of 5


MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

MORNSUN®

Efficiency Vs Input Voltage (Full Load)







Design Reference

1. Typical application

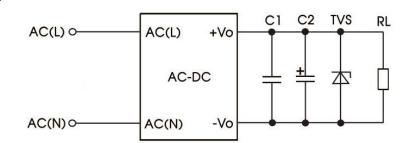


Fig. 1: Typical circuit diagram

Part no.	C1	C2	TVS
LO50-23B03E			SMBJ7.0A
LO50-23B05E			SMBJ7.0A
LO50-23B09E			SMBJ12A
LO50-23B12E	0.1µF/250V	100.05/621/	SMBJ20A
LO50-23B15E		100µF/63V	SMBJ20A
LO50-23B24E			SMBJ30A
LO50-23B27E			SMBJ30A
LO50-23B48E			SMBJ64A

Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure.

2. For additional information please refer to application notes on www.mornsun-power.com.




MORNSUN Guangzhou Science & Technology Co., Ltd.

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

MORNSUN®

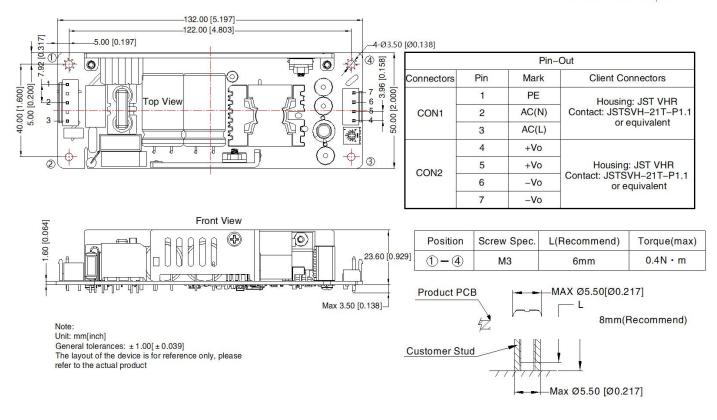

Note:

- 1. For additional information on Product Packaging please refer to <u>www.mornsun-power.com</u>. Packaging bag number: 58220179;
- 2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25 °C , humidity<75% with nominal input voltage and rated output load;
- 3. All index testing methods in this datasheet are based on our company corporate standards;
- 4. We can provide product customization service, please contact our technicians directly for specific information;
- 5. Products are related to laws and regulations: see "Features" and "EMC";
- 6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. ChinaTel: 86-20-38601850Fax: 86-20-38601272E-mail: info@mornsun.cnwww.mornsun-power.com



MORNSUN Guangzhou Science & Technology Co., Ltd.

2022.03.01-A/2

Page 5 of 5