10W, DIY AC/DC converter















- Ultra-wide 85 305VAC and 100 430VDC input voltage
- Accepts AC or DC input (dual-use of same terminal)
- ullet Operating ambient temperature range: -40°C to +85°C
- Multi application, flexible layout
- Compact size, high power density, green power
- Output short circuit, over-current, over-voltage protection
- Design refer to IEC/EN60335-1, IEC/EN61558-1 standards

LS10-13B05/12/24R3 is one of Mornsun's highly efficient green power AC-DC Converters. It features ultra-wide AC input and at the same time accepts DC input voltage, high reliability, low power consumption and Class II reinforced isolation. All models are particularly suitable for industrial control, electric power, instrumentation and smart home applications which have high requirement for dimension and don't have high requirement on EMC. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

Selection	Guide				
Certification	Part No.	Output Power	Nominal Output Voltage and Current (Vo/Io)	Efficiency at 230VAC (%) Typ.	Capacitive Load (uF) Max.
	LS10-13B05R3		5V/2000mA	77	1500
UL/EN/IEC	LS10-13B12R3	10W	12V/830mA	82	680
	LS10-13B24R3		24V/420mA	83	330

Note: 1. The nominal output voltage refers to the voltage applied to the load terminal after adding external circuits;

2. If the product is used in a severe vibration application, it needs to be glued and fixed.

Input Specifications					
Item	Operating Conditions	Min.	Тур.	Max.	Unit
la ant Mallana Demons	AC input	85		305	VAC
Input Voltage Range	DC input	100		430	VDC
Input Frequency		47		63	Hz
	115VAC			0.30	A
Input Current	230VAC			0.18	
	115VAC		15		
Inrush Current	277VAC		30		
Recommended External Input Fuse		1A, slow-blow, required (The actual use needs to be selected according to the application environment)			
Hot Plug		Unavailable			

Output Specifications						
Item	Operating Conditions	Min.	Тур.	Max.	Unit	
Output Voltage Accuracy			±2			
Line Regulation	Rated load		±1		%	
Load Regulation	0% - 100% load		±1.5			
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)		80	150	mV	
Temperature Coefficient			±0.02		%/°C	
Stand-by Power Consumption	230VAC			0.30	W	
Short Circuit Protection		Hico	Hiccup, continuous, self-recovery			
Over-current Protection			≥110% Io, self-recovery			
	5VDC output	≤9VDC	≤9VDC (Output voltage clamp or hiccup			
Over-voltage Protection	12VDC output	≤16VDC	≤16VDC (Output voltage clamp or hiccup)			
	24VDC output	≤32VDC	≤32VDC (Output voltage clamp or hiccup)			

**MORNSUN®** 




Minimum Load		0			%	
Note: * The "parallel cable" method is used for ripple and noise test, please refer to AC-DC Converter Application Notes for specific information.						


General S	pecifications					
Item		Operating Conditions	Min.	Тур.	Max.	Unit
Isolation Input-out		Electric Strength Test for 1min.,	3600	-		VAC
	Input-output	leakage current<5mA	5000	-		VDC
Operating Tem	perature		-40	-	+85	°C
Storage Tempe	erature		-40	-	+105	
Storage Humidity			-		95	%RH
O. I. I. T		Wave-soldering	260 ± 5°C; time: 5 - 10s			
Soldering Temp	perature	Manual-welding	360 ± 10°C; time: 3 - 5s			
		+55℃ to +85℃	2.5	-		%/℃
Power Derating	g	85VAC - 100VAC	1	-		0/ 0 /0 0
		277AVC - 305VAC	0.54	-		%/VAC
Safety Standard			IEC/UL62368-1 Safety Approval & BS EN/EN62368-1 (Report); Design refer to IEC/EN60335-1, IEC/EN61558-		N61558-1	
Safety Class			CLASS II	CLASS II		
MIL-HDBK-217F@25℃>1,0				1,000,000 h		

Mechanical Specifications				
Dimension	32.00 x 17.20 x 15.05 mm			
Weight	8.2g (Typ.)			
Cooling method	Free air convection			

Electrom	agnetic Compatibilit	y (EMC)		
	CE	CISPR32/EN55032	CLASS A (Application circuit 1, 4)	
Emissions	CE	CISPR32/EN55032	CLASS B (Application circuit 2, 3)	
LITHSSIOTIS	RE	CISPR32/EN55032	CLASS A (Application circuit 1, 4)	
	KE	CISPR32/EN55032	CLASS B (Application circuit 2, 3)	
	ESD	IEC/EN61000-4-2	Contact ±6KV	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	FET	IEC/EN61000-4-4	±2KV (Application circuit 1, 2)	perf. Criteria B
	EFT	IEC/EN61000-4-4	±4KV (Application circuit 3, 4)	perf. Criteria B
Immunity	Cura	IEC/EN61000-4-5	line to line ±1KV (Application circuit 1, 2)	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±2KV (Application circuit 3, 4)	perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11	0%,70%	perf. Criteria B

# Product Characteristic Curve







**MORNSUN®** 


#### Note:

- ① With an AC input between 85 -100VAC/277-305VAC and a DC input between 100 120VDC/390 430VDC, the output power must be derated as per temperature derating curves;
- ② This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

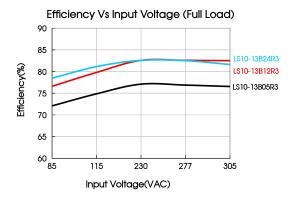

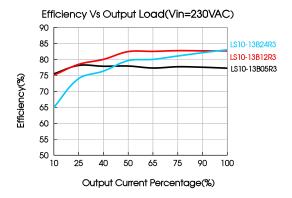

## Additional Circuits Design Reference

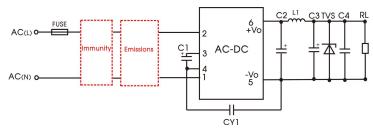

LS series additional circuits design reference

	LS10 series additional components selection guide (No EMC devices)							
Part No.	C1 (required)	C2 (required)	L1 (required)	C3 (required)	C4	CY1 (required)	TVS	
LS10-13B05R3		820uF/16V (solid-state capacitor)		150.5(05)/			SMBJ7.0A	
LS10-13B12R3	22uF/450V	270uF/16V (solid-state capacitor)	2.2uH/15m Ω Max/6.5A	150uF/35V	0.1uF/50V	1nF/400VAC	SMBJ20A	
LS10-13B24R3		470uF/35V		100uF/35V			SMBJ30A	


#### Note:

- 1. C1 is used as filter capacitor with AC input (must be connected externally) and as EMC filter capacitor with DC input (must be connected), and it is recommended to use the capacitor with ripple current >300mA@100KHz.
- 2. We recommend using an electrolytic capacitor with high frequency and low ESR rating for C3 (refer to manufacture's datasheet), electrolytic capacitor can be used for C2 when applied in normal and high temperature environments. Combined with C2, L1, they form a pi-type filter circuit. Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%, C4 is a ceramic capacitor, used for filtering high frequency noise.
- 3. A suppressor diode (TVS) is recommended to protect the application in case of converter failure and specification should be 1.2 times of the output voltage.
- 4. L1 (2.2uH, P/N: 12050504) Mornsun quotation is available.

### **Environmental Application EMC Solution**


	LS series	environmental application E	EMC solution se	election table		
Recommended circuit	Application environmental	Typical industry	Input voltage range	Environment temperature	Emissions	Immunity
1	Basic application	None		-40°C to +85°C	Class A	Level 3
2 Indoor civil environment Indoor general environment		Smart home/Home appliances (2Y)		-25°C to +55°C	Class B	Level 3
	_	Intelligent building/Intelligent agriculture		-20 C 10 +00 C	Class B	Levers
3	Indoor industrial environment	Manufacturing workshop	85 - 305VAC	-25°C to +55°C	Class B	Level 4
4	Outdoor general environment	ITS/Video monitoring/Charging point/Communication/Security and protection		-40°C to +85°C	Class A	Level 4

**MORNSUN®** 

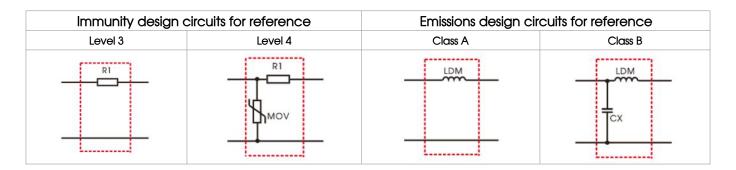

# Electromagnetic Compatibility Solution--Recommended Circuit

1. Application circuit 1—Basic application

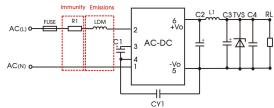


Recommended circuit 1

Application environmental	Ambient temperature range	Immunity Level	Emissions Class
Basic application	<b>-40</b> °C to +85°C	Level 3	Class A

Component	Recommended value			
FUSE 1A/300V, slow-blow, required				
R1	6.8 ♀/3W (wire-wound resistor, required)			
LDM 2.2mH/Max: 4 \( \Omega \)/Min: 0.24A				
Note: R1 is the input plug-in resistor, this resistor needs to be a wire-wound resistor (required), please do not select SMD resistor or carbon film resistor.				

2. Application circuit 2——Universal system recommended circuits for indoor civil /general environment

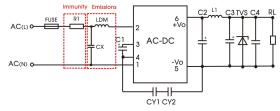

Recommended circuit 2


Application environmental	Ambient temperature range	Immunity Level	Emissions Class
Indoor civil /general	<b>-25</b> ℃ to +55℃	Level 3	Class B

Component	Recommended value
FUSE	1A/300V, slow-blow, required
R1	6.8 \( \Omega / 3W \) (wire-wound resistor, required)
CY1 (CY2)	1.0nF/400VAC
LDM	2.2mH/Max: 4 Ω /Min: 0.24A
СХ	0.1uF/310VAC

Note 1: To meet the IEC/EN60335 certification, the two Y capacitors of the primary and secondary need to be externally connected (CY1/CY2, value at 2.2nF/250VAC);

Note 2: According to the certification requirements, the CX capacitor needs to be connected in parallel with the bleeder resistance, the recommended resistance value is less than  $3.8 M\,\Omega$ , and the actual need to be selected according to the certification standard. Note 3: R1 is the input plug-in resistor, this resistor needs to be a wire-wound resistor (required), please do not select SMD resistor or carbon film resistor.

3. Application circuit 3—Universal system recommended circuits for indoor industrial environment

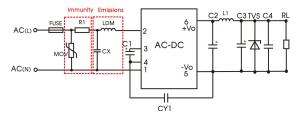

Recommended circuit 3


Application environmental	Ambient temperature range	Immunity Level	Emissions Class
Indoor industrial	<b>-25</b> ℃ <b>to +55</b> ℃	Level 4	Class B

Component	Recommended value
FUSE	2A/300V, slow-blow, required
MOV	\$14K350
CY1	1nF/400VAC
CX	0.1uF/310VAC
LDM	2.2mH/Max: 4Ω/Min: 0.24A
R1	$6.8\Omega$ /3W (wire-wound resistor, required)

Note 1: According to the certification requirements, the CX capacitor needs to be connected in parallel with the bleeder resistance, the recommended resistance value is less than  $3.8M\Omega$ , and the actual need to be selected according to the certification standard.

Note 2: R1 is the input plug-in resistor, this resistor needs to be a wire-wound resistor (required), please do not select SMD resistor or carbon film resistor.

4. Application circuit 4—Universal system recommended circuits for outdoor general environment

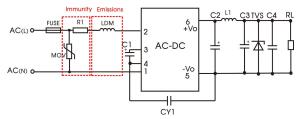

Recommended circuit 4

Application environmental	Ambient temperature range	Immunity Level	Emissions Class
Outdoor general environment	<b>-40</b> ℃ <b>to +85</b> ℃	Level 4	Class A


Component	Recommended value
FUSE	2A/300V, slow-blow, required
MOV	\$14K350
LDM	2.2mH/Max: 4Ω/Min: 0.24A
R1	6.8 \( \Omega / 3\W \) (wire-wound resistor, required)
Note: R1 is the input plug-in resistor, this resistor needs to be a wire-wo	und resistor (required), please do not select SMD resistor or carbon film resistor.


5. For additional information please refer to application notes on <a href="www.mornsun-power.com">www.mornsun-power.com</a>.

## LS10-13B05/12/24R3 Dimensions and Recommended Layout

## THIRD ANGLE PROJECTION



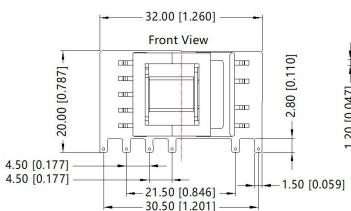




Note:Grid 2.54\*2.54mm

Pin	Function
1	AC(N)
2	AC(L)
3	+V(CAP)
4	-V(CAP)
5	-Vo
6	+Vo

**Bottom View** 

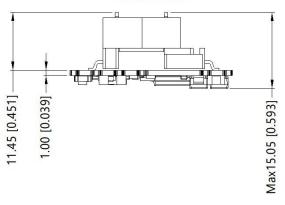

#### Note:

Unit: mm[inch]

Pin section tolerances:  $\pm 0.10[\pm 0.004]$ General tolerances:  $\pm 1.00[\pm 0.039]$ 

The layout of the device is for reference only,

please refer to the actual product

### Note:

- 1. For additional information on Product Packaging please refer to <a href="www.mornsun-power.com">www.mornsun-power.com</a>. Packaging bag number: 58220134;
- 2. External electrolytic capacitors are required to modules, more details refer to typical applications;
- 3. This part is open frame, at least 6.4mm creepage distance between the primary and secondary external components of the module is needed to meet the safety requirement;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%, recommended circuit, nominal input voltage (115V and 230V) and rated output load;
- 5. All index testing methods in this datasheet are based on our company corporate standards;
- 6. We can provide product customization service, please contact our technicians directly for specific information;
- 7. Products are related to laws and regulations: see "Features" and "EMC";
- 8. If product involves multi-brand materials and there are differences in color etc, please refer to the standards of each manufacturer;
- 9. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

# Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. Chin Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com

**MORNSUN®**