

AC/DC Converter

PVA120-27Bxx-C Series

MORNSUN®

120W isolated AC-DC converter with ultra-wide, ultra-high 85 - 900VAC input for coalmine



RoHS



FEATURES

- Specially designed for electrical equipment in coal mining industry
- Ultra-wide 85 - 900VAC input voltage range
- Industrial grade operating temperature: -25°C ~ +70°C
- High I/O isolation test voltage of 4000VAC
- High reliability, high efficiency, long lifespan
- Output short circuit, over-current and over-voltage protection
- Immunity EFT: ±4KV perf, Surge: ±2KV perf. Criteria B

PVA120-27Bxx-C series is a special power supply designed for customers who provide electrical equipment for coal mining industry to meet the requirements of safety in providing power supply, easy mounting and technology innovation etc. It features ultra-wide input voltage range from 85 to 900VAC which covers 127/220/380/660VAC used in coal mining industry, high isolation voltage, excellent EMS performance, multiple protections and high efficiency. They are widely used in monitoring and security sectors of coal mining industry.

Selection Guide

Part No.*	Output Power	Nominal Output Voltage and Current (Vo/Io)	Efficiency at 330VAC (%) Typ.	Capacitive Load (μF) Max.
PVA120-27B30-C	120W	30V/4A	82	1500
PVA120-27B35-C	122.5W	35V/3.5A	82	1000

Note: *Use suffix "H" for can be used in harsh working conditions in coal mines (with transient peak voltage).

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Input Voltage Range		85	--	900	VAC	
Input Current	127VAC	--	--	2.5	A	
	330VAC	--	--	1.5		
	660VAC	--	--	0.8		
Inrush Current	330VAC	--	--	140		
	660VAC	--	--	280		
	900VAC	--	--	360		
External Input Fuse		1000VAC/6A, required (brand: Adler models: A851600b00 base models: BH300)				
Hot Plug		Unavailable				

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	All load range	--	±2	--	%
Line Regulation	All load	--	±0.5	--	
Load Regulation	0% - 100% load	--	±1	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	--	100	200	mV
Temperature Coefficient		--	±0.02	--	%/°C
Short Circuit Protection		Hiccup, continuous, self-recovery			
Over-current Protection		≥ 110%Io, hiccup, self-recovery			
Over-voltage Protection	30V	≤ 40VDC (Output voltage clamp or hiccup)			
	35V	≤ 45VDC (Output voltage clamp or hiccup)			
Minimum Load		0	--	--	%
Hold-up Time	Room temperature, Full load	330VAC input	--	40	ms
		660VAC input	--	80	

Note: * The "Tip and barrel method" is used for ripple and noise test, please refer to PV Converter Application Notes for specific information.

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.07.02-A/2

Page 1 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input - output	Electric Strength Test for 1min., leakage current $\leq 3\text{mA}$			VAC
Insulation Resistance	500VDC	$\geq 50 \times 10^6$			Ω
Operating Temperature		-25	--	+70	$^{\circ}\text{C}$
Storage Temperature		-40	--	+85	
Storage Humidity		--	--	95	%RH
Power Derating	-25 $^{\circ}\text{C}$ ~ -10 $^{\circ}\text{C}$	2.6	--	--	%/ $^{\circ}\text{C}$
	+50 $^{\circ}\text{C}$ ~ +70 $^{\circ}\text{C}$	2.0	--	--	
	85VAC-100VAC	3.3	--	--	%/ VAC
	850VAC-900VAC	1.0	--	--	
Switching Frequency		--	65	--	kHz
MTBF	MIL-HDBK-217F@25 $^{\circ}\text{C}$	$\geq 300,000$ h			



Mechanical Specifications

Dimensions	187.00 x 113.00 x 59.00mm
Weight	824g (Typ.)
Cooling Method	Free air convection



Electromagnetic Compatibility (EMC)

Immunity	ESD	IEC/EN61000-4-2	Contact $\pm 6\text{kV}$	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 4\text{kV}$	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line $\pm 2\text{kV}$	perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A

Product Characteristic Curve

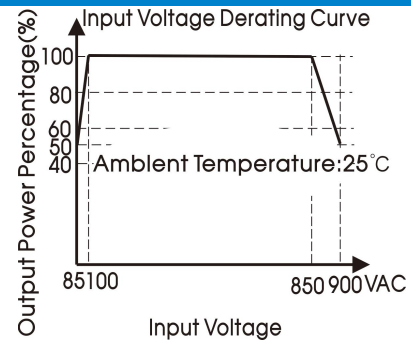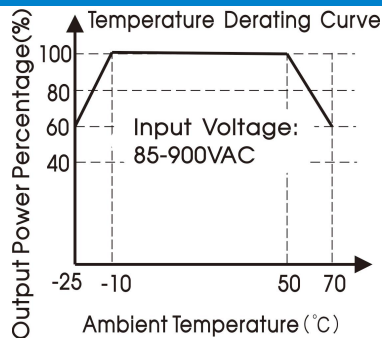

Note: ① With an input between 85 - 100VAC/850 - 900VAC, the output power must be derated as per temperature derating curves;
 ② This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

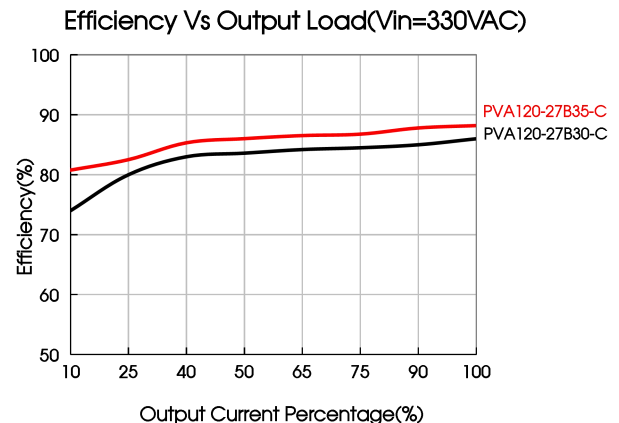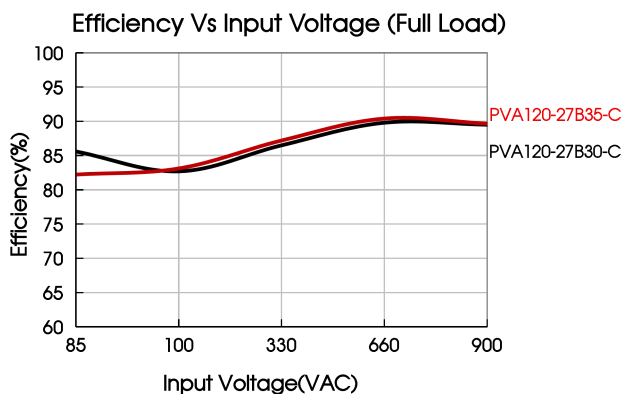

Design Reference

1. Typical application

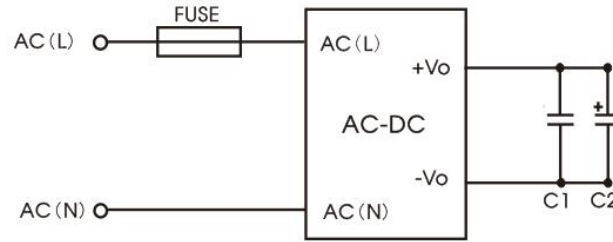



Fig. 1

Model	FUSE	C1	C2
PVA120-27Bxx-C	1000VAC/6A, required (brand: Adler models: A851600b00 base models: BH300)	1uF	10uF

Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise.

2. Trim Function for Output Voltage Adjustment (open if unused)

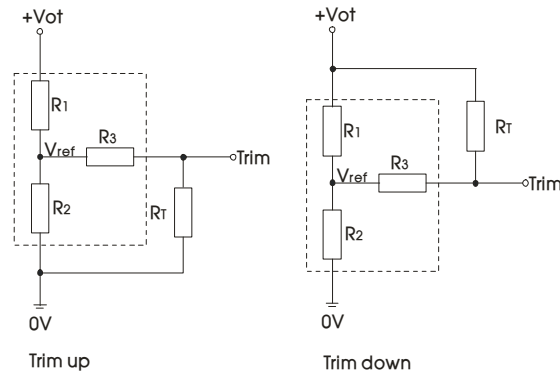

TRIM resistor connection (dashed line shows internal resistor network)

Calculating Trim resistor values:

$$\begin{aligned}
 \text{up: } R_T &= \frac{\alpha R_2}{R_2 - \alpha} - R_3 & \alpha &= \frac{V_{ref}}{V_{ot} - V_{ref}} \cdot R_1 \\
 \text{down: } R_T &= \frac{\alpha R_1}{R_1 - \alpha} - R_3 & \alpha &= \frac{V_{ot} - V_{ref}}{V_{ref}} \cdot R_2
 \end{aligned}$$


R_T = Trim Resistor value;
 α = Self-defined parameter;

Vout	R1(K Ω)	R2(K Ω)	R3(K Ω)	Vref(V)	Vot(V)
30V	17.8	1.48	1	2.5	Resulting trimmed output voltage, range $\leq \pm 10\%$
35V	19.82	1.5	1	2.5	

3. For more information Please find the application notes on www.mornsun-power.com

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

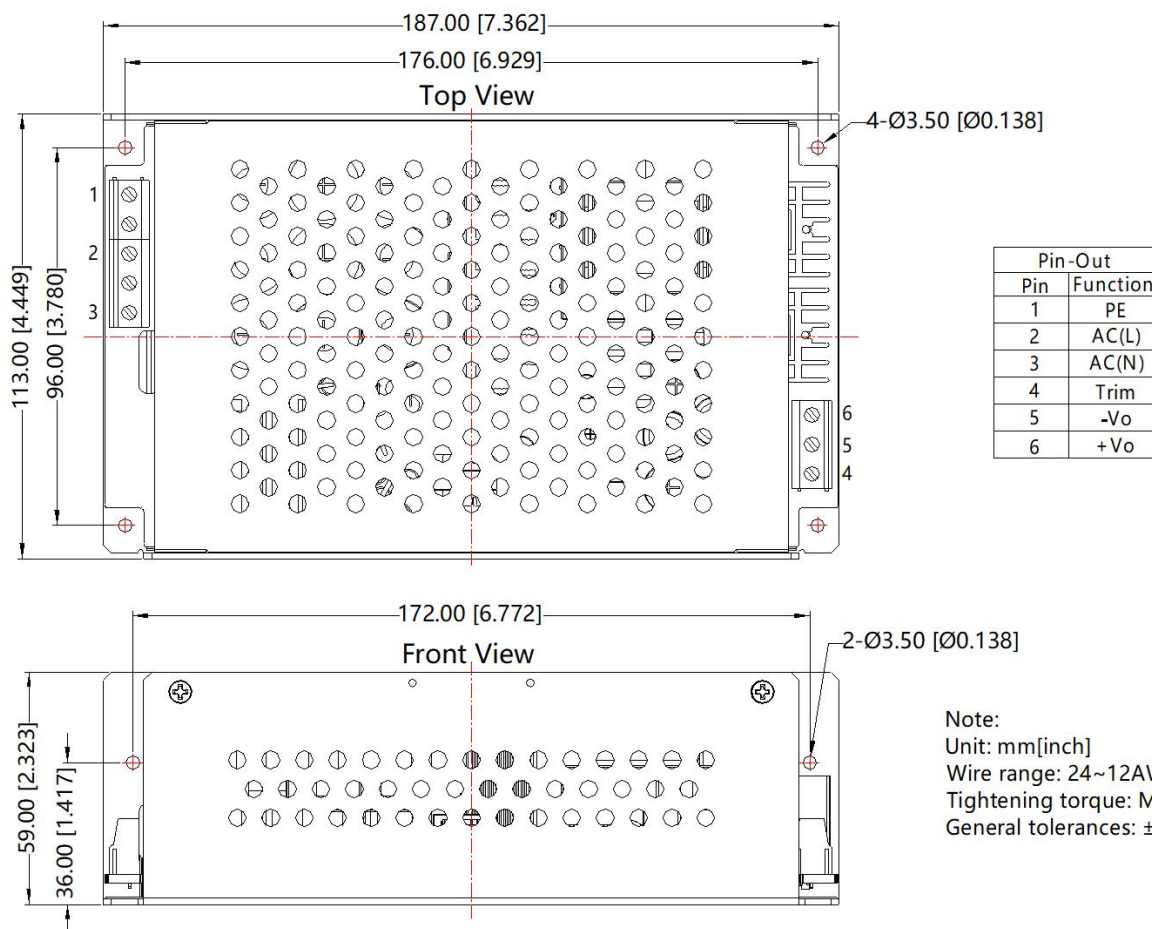

Note:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220104;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75% with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on our company corporate standards;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com