

# AC/DC Converter

## PVA70-27Bxx Series

# MORNSUN®

70W isolated AC-DC converter with ultra-wide, ultra-high 85 - 900VAC input for coalmine



RoHS



## FEATURES

- Specially designed for electrical equipment in coal mining industry
- Ultra-wide 85 - 900VAC input voltage range
- Industrial grade operating temperature: -25°C to +70°C
- High I/O isolation test voltage of 4000VAC
- High reliability, high efficiency, long lifespan
- Output short circuit, over-current and over-voltage protection
- Immunity, EFT/Surge: ±4KV perf. Criteria B

PVA70-27Bxx series is a special power supply designed for customers who provide electrical equipment for coal mining industry to meet the requirements of safety in providing power supply, easy mounting and technology innovation etc. It features ultra-wide input voltage range from 85 to 900VAC which covers 127/220/380/660VAC used in coal mining industry, high isolation voltage, excellent EMS performance, multiple protections and high efficiency. They are widely used in monitoring and security sectors of coal mining industry.

## Selection Guide

Part No.*	Output Power	Nominal Output Voltage and Current (Vo/Io)	Efficiency at 330VAC (%) Typ.	Capacitive Load (μF) Max.
PVA70-27B24	70W	24V/2917mA	87	800
PVA70-27B28	70W	28V/2500mA	87	800
PVA70-27B35	70W	35V/2000mA	87	800

Note: \*Use suffix "H" for can be used in harsh working conditions in coal mines (with transient peak voltage).

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	--	900	VAC
Input Frequency		47	--	63	Hz
Input Current	127VAC	--	--	1.20	A
	330VAC	--	--	0.80	
	660VAC	--	--	0.50	
Inrush Current	330VAC	--	80	--	
	660VAC	--	140	--	
	900VAC	--	180	--	
External input Fuse		1000VAC/3A, required (brand: Adler models: A851300b00 base models: BH300)			
Hot Plug		Unavailable			

## Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	All load range	--	±2	--	%
Line Regulation	Rated load	--	±0.5	--	
Load Regulation	10% - 100% load	--	±1	--	
Ripple & Noise*	20MHz bandwidth	24V/28V output		--	mV
	(peak-to-peak value)	35V output		--	
Temperature Coefficient		--	±0.02	--	%/°C
Short Circuit Protection		Hiccup, continuous, self-recovery			
Over-current Protection		≥110%Io, hiccup, self-recovery			
Over-voltage Protection	24V output	≤35VDC			
	28V output	≤40VDC			
	35V output	≤45VDC			

# MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.07.02-A/4

Page 1 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Min. Load		0	--	--	
Trim	The total output power remains unchanged	--	--	±10	%
Hold-up Time	Room temperature, full load	330VAC input	--	40	--
		660VAC input	--	80	--
Start-up Delay Time	85-900VAC	--	2	3	s

Note: \* The "Tip and barrel method" is used for ripple and noise test, please refer to AC-DC Converter Application Notes for specific information;

\*\* Delay Time is tested over the full input voltage and the full output load range (The cooling-time between input power-off and power-on again is greater than 15s).

## General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input - output	Electric Strength Test for 1min., leakage current $\leq 3\text{mA}$	4000	--	--	VAC
Insulation Resistance	500VDC		$\geq 50 \times 10^6$			$\Omega$
Operating Temperature			-25	--	+70	$^{\circ}\text{C}$
Storage Temperature			-40	--	+85	
Storage Humidity			--	--	95	%RH
Power Derating	-25 $^{\circ}\text{C}$ to -10 $^{\circ}\text{C}$		2.6	--	--	%/ $^{\circ}\text{C}$
	+50 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$	28V/35V output	2.0	--	--	
	+50 $^{\circ}\text{C}$ to +60 $^{\circ}\text{C}$	24V output	1.4	--	--	
	+60 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$	24V output	3.0	--	--	
	85VAC - 100VAC		2.0	--	--	%/ $\text{VAC}$
	850 VAC - 900VAC	24V output	0.4	--	--	
		28V/35V output	0.3	--	--	
Switching Frequency			--	65	--	kHz
Altitude			--	--	5000	m
MTBF	MIL-HDBK-217F@25 $^{\circ}\text{C}$		$\geq 300,000$ h			



## Mechanical Specifications


Dimensions	155.00 x 95.00 x 41.00mm
Weight	340g (Typ.)
Cooling Method	Free air convection

## Electromagnetic Compatibility (EMC)



Immunity	ESD	IEC/EN61000-4-2	Contact $\pm 6\text{kV}$	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 4\text{kV}$	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line $\pm 2\text{kV}$ /line to ground $\pm 4\text{kV}$	perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A

## Product Characteristic Curve

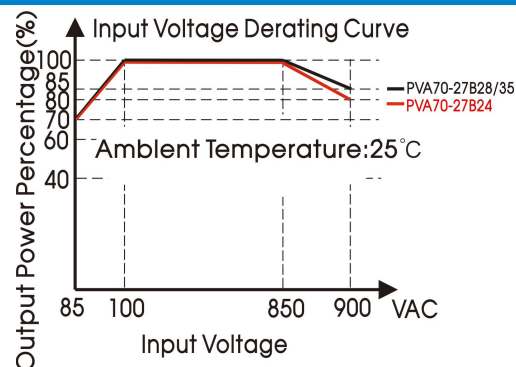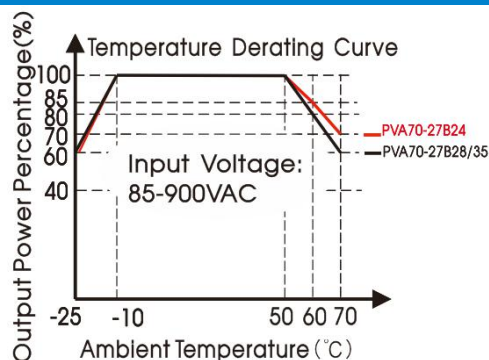



Note: ① With an input between 85 - 100VAC/850 - 900VAC, the output power must be derated as per temperature derating curves;  
 ② For operation of this converter series in an altitude between 2000 - 5000m, the output power must be derated as per the altitude derating curve;  
 ③ This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

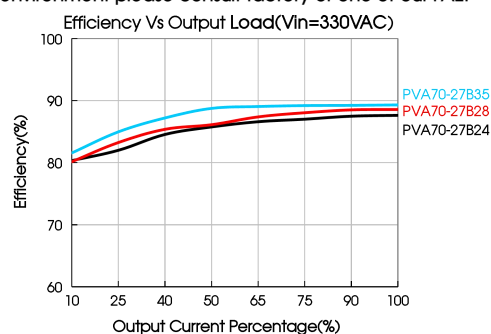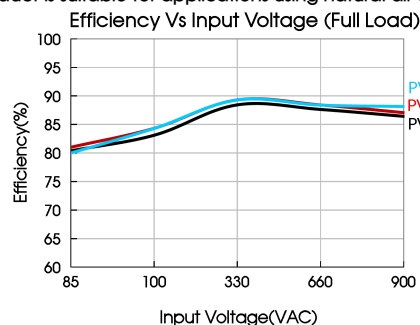

## Design Reference

### 1. Typical application

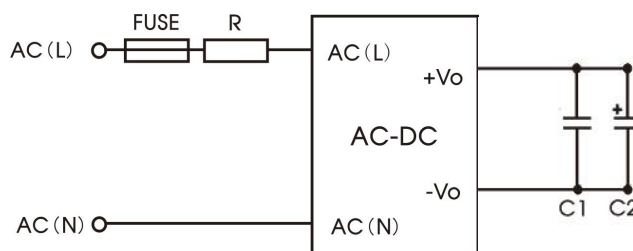



Fig. 1

Model	FUSE	C1	C2	R
PVA70-27Bxx	1000VAC/3A, required (brand: Adler models: A851300b00 base models: BH300)	1uF	10uF	1Ω/≥5W

#### Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise.

### 2. Trim Function for Output Voltage Adjustment (open if unused)

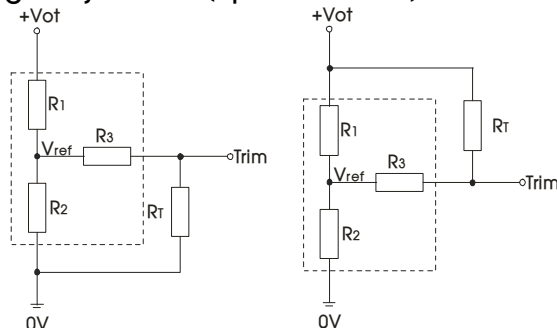

TRIM resistor connection (dashed line shows internal resistor network)

Calculating Trim resistor values:


$$\begin{aligned} \text{up: } R_T &= \frac{\alpha R_2}{R_2 - \alpha} - R_3 & \alpha &= \frac{V_{ref}}{V_{ot} - V_{ref}} \cdot R_1 \\ \text{down: } R_T &= \frac{\alpha R_1}{R_1 - \alpha} - R_3 & \alpha &= \frac{V_{ot} - V_{ref}}{V_{ref}} \cdot R_2 \end{aligned}$$


$R_T$  = Trim Resistor value;  
 $\alpha$  = Self-defined parameter;

V <sub>out</sub>	R <sub>1</sub> (K $\Omega$ )	R <sub>2</sub> (K $\Omega$ )	R <sub>3</sub> (K $\Omega$ )	V <sub>ref</sub> (V)	V <sub>ot</sub> (V)
24V	12.4	1.43	1	2.5	Resulting trimmed output voltage, range $\leq \pm 10\%$
28V	12.4	1.2	1	2.5	
35V	12.4	0.94	1	2.5	


3. For more information Please find the application notes on [www.mornsun-power.com](http://www.mornsun-power.com).

## Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

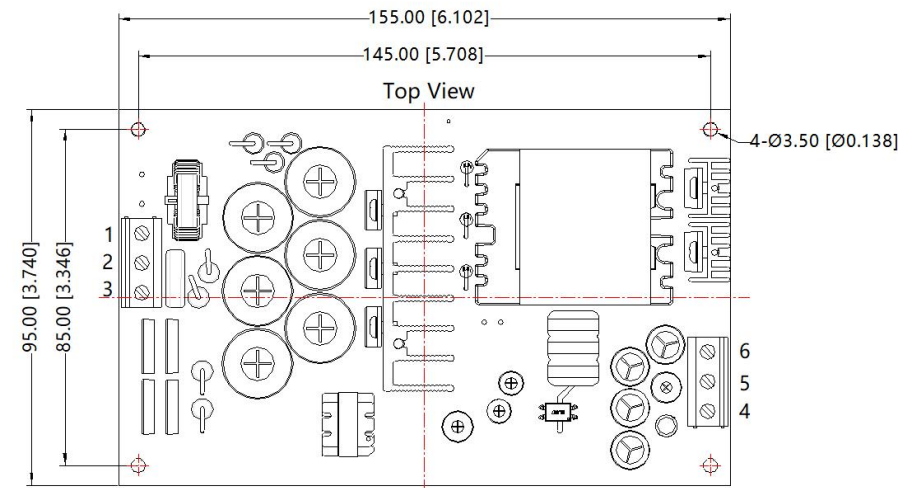

Pin	Function
1	AC(L)
2	NC
3	AC(N)
4	Trim
5	-V <sub>o</sub>
6	+V <sub>o</sub>

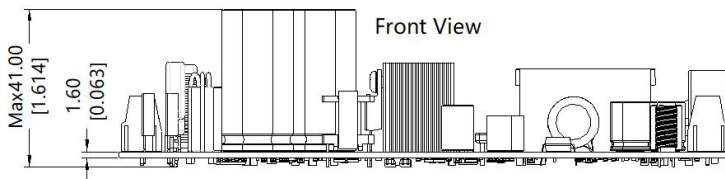

Note:

Unit: mm[inch]

Wire range: 24-12AWG

Tightening torque: Max 0.4 N·m

General tolerances:  $\pm 1.00 [\pm 0.039]$

The layout of the device is for reference only, please refer to the actual product

Note:

- For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58220071;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a = 25^\circ\text{C}$ , humidity < 75% with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on our company corporate standards;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

## Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China  
 Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: [info@mornsun.cn](mailto:info@mornsun.cn) [www.mornsun-power.com](http://www.mornsun-power.com)