

1W Isolated DC-DC converter  
Fixed input voltage, unregulated dual output



CB Report

RoHS

Patent Protection

EN 62368-1 BS EN 62368-1 IEC 62368-1

## FEATURES

- Continuous short-circuit protection
- No-load input current as low as 8mA
- Operating ambient temperature range: -40°C to +105°C
- High efficiency up to 85%
- Compact SMD package
- I/O isolation test voltage: 1.5k VDC
- Industry standard pin-out

A\_XT-1WR3-TR series are specially designed for applications where two isolated voltage is required in a distributed power supply system. They are suitable for: pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits.

## Selection Guide

Certification	Part No.	Input Voltage (VDC)	Output		Full Load Efficiency (%) Min./Typ.	Capacitive Load(μF) Max.*
		Nominal (Range)	Voltage (VDC)	Current (mA) Max./Min.		
EN/BS EN/IEC	A1205XT-1WR3-TR	12 (10.8-13.2)	±5	±100/±10	78/82	1200
	A1209XT-1WR3-TR		±9	±56/±6	79/83	470
	A1212XT-1WR3-TR		±12	±42/±5	79/83	220
	A1215XT-1WR3-TR		±15	±34/±4	79/83	220
	A1224XT-1WR3-TR		±24	±21/±3	81/85	100
	A1515XT-1WR3-TR	15 (13.5-16.5)	±15	±34/±4	79/83	220
	A2405XT-1WR3-TR	24 (21.6-26.4)	±5	±100/±10	76/82	1200
	A2409XT-1WR3-TR		±9	±56/±6	77/83	470
	A2412XT-1WR3-TR		±12	±42/±5	77/83	220
	A2415XT-1WR3-TR		±15	±34/±4	77/83	220
	A2424XT-1WR3-TR		±24	±21/±3	79/85	100

Note: \* The specified maximum capacitive load for positive and negative output is identical.

## Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	12V input	±5VDC output	--	102/8	107/--	mA
		±9VDC/±12VDC/±15VDC output	--	101/8	106/--	
		±24VDC output	--	99/8	103/--	
	15V input		--	81/8	85/--	
	24V input	±5VDC/±9VDC/±12VDC/±15VDC output	--	51/8	55/--	
		±24VDC output	--	50/8	53/--	
Reflected Ripple Current*			--	15	--	
Surge Voltage(1sec. max.)	12VDC input		-0.7	--	18	VDC
	15VDC input		-0.7	--	21	
	24VDC input		-0.7	--	30	
Input Filter			Capacitance filter			
Hot Plug			Unavailable			

Note: \* Refer to DC-DC Converter Application Notes for detailed description of reflected ripple current test method.

## Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy			See output regulation curves (Fig. 1)			
Linear Regulation	Input voltage change: $\pm 1\%$		--	--	1.2	--
Load Regulation	10%-100% load	$\pm 5\text{VDC}$ output	--	5	15	%
		$\pm 9\text{VDC}$ output	--	3	10	
		$\pm 12\text{VDC}$ output	--	3	10	
		$\pm 15\text{VDC}$ output	--	3	10	
		$\pm 24\text{VDC}$ output	--	2	10	
Ripple & Noise*	20MHz bandwidth	$\pm 5\text{VDC}/\pm 9\text{VDC}/\pm 12\text{VDC}/\pm 15\text{VDC}$ output	--	30	75	mVp-p
		$\pm 24\text{VDC}$ output	--	50	100	
Temperature Coefficient	Full load		--	$\pm 0.02$	--	%/ $^{\circ}\text{C}$
Short-circuit Protection			Continuous, self-recovery			

Note: \* The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

## General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input-output electric strength test for 1 minute with a leakage current of 1mA max.		1500	--	--	VDC
Insulation Resistance	Input-output resistance at 500VDC		1000	--	--	M $\Omega$
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V		--	20	--	pF
Operating Temperature	Derating when operating temperature $\geq 100^{\circ}\text{C}$ , (see Fig. 2)		-40	--	105	$^{\circ}\text{C}$
Storage Temperature			-55	--	125	
Case Temperature Rise	$T_a=25^{\circ}\text{C}$		--	25	--	
Storage Humidity	Non-condensing		5	--	95	%RH
Reflow Soldering Temperature*			Peak temp. $\leq 245^{\circ}\text{C}$ , maximum duration time $\leq 60\text{s}$ over $217^{\circ}\text{C}$			
Vibration			10-150Hz, 5G, 0.75mm. along X, Y and Z			
Switching Frequency	Full load, nominal input voltage		--	260	--	kHz
MTBF	MIL-HDBK-217F@ $25^{\circ}\text{C}$		3500	--	--	k hours
Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-020D.1		Level 1			

Note: \* For actual application, please refer to IPC/JEDEC J-STD-020D.1.

## Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94V-0)
Dimensions	15.24 x 11.40 x 7.25 mm
Weight	1.4g(Typ.)
Cooling Method	Free air convection

## Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B
	RE	CISPR32/EN55032	CLASS B
Immunity	ESD	IEC/EN61000-4-2	Air $\pm 8\text{kV}$ , Contact $\pm 6\text{kV}$ perf. Criteria B

Note: Refer to Fig.4 for recommended circuit test.

## Typical Performance Curves

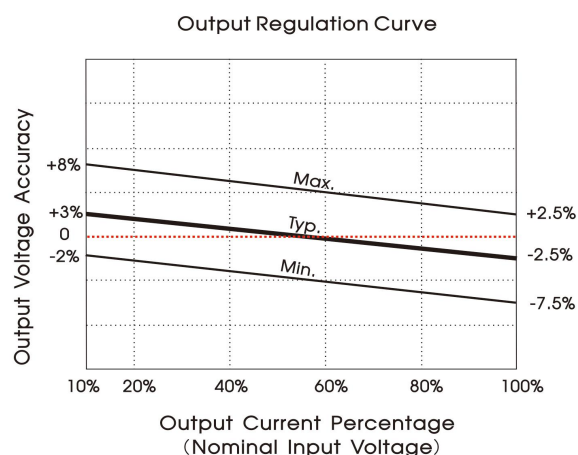


Fig. 1





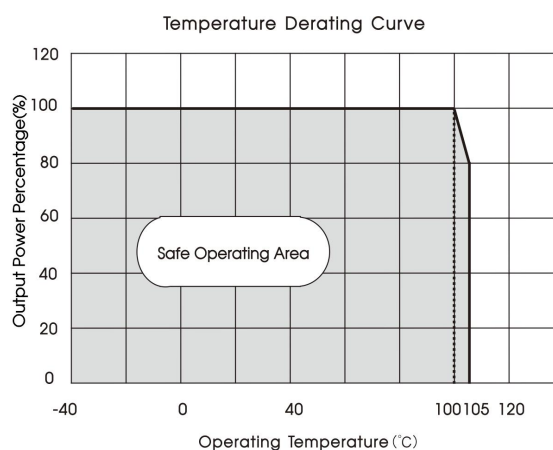


Fig. 2

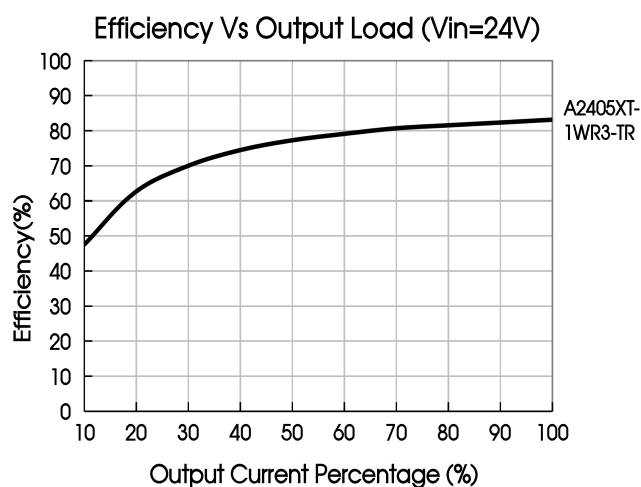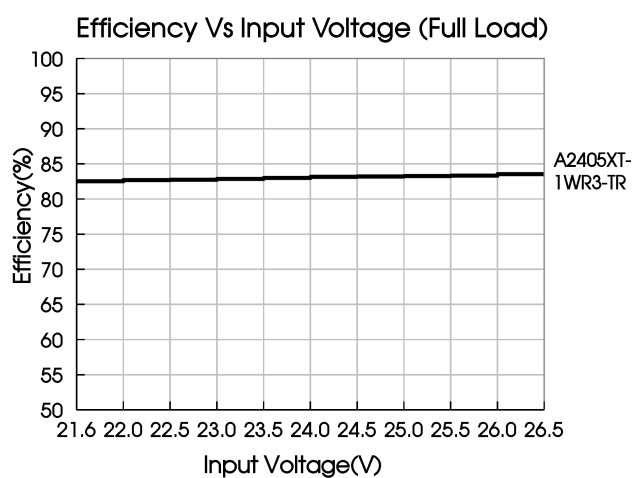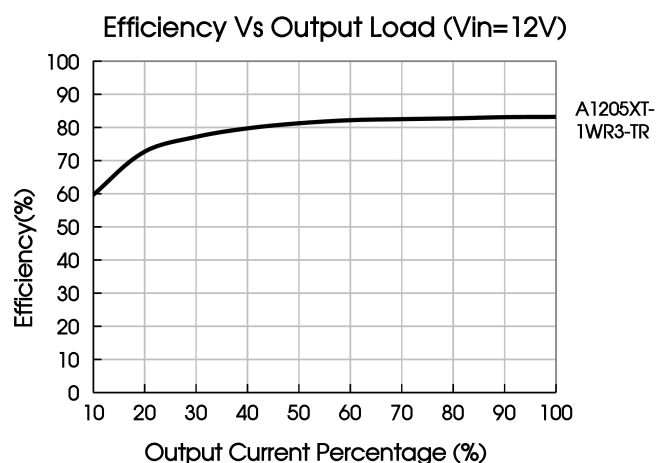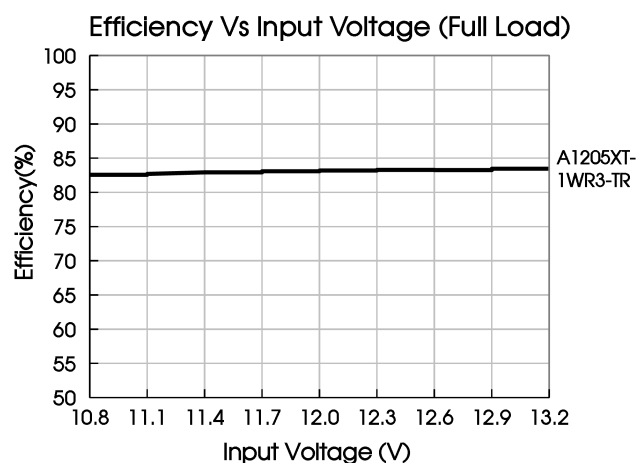

### Design Reference

#### 1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig. 3.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.

Table 1: Recommended input and output capacitor values

Vin	Cin	Vo	Cout
12VDC	2.2μF/25V	±5VDC	4.7μF/16V
15VDC	2.2μF/25V	±9VDC	1μF/16V
24VDC	1μF/50V	±12VDC	1μF/25V
--	--	±15VDC	0.47μF/25V
--	--	±24VDC	0.47μF/50V



Fig. 3

#### 2. EMC compliance circuit

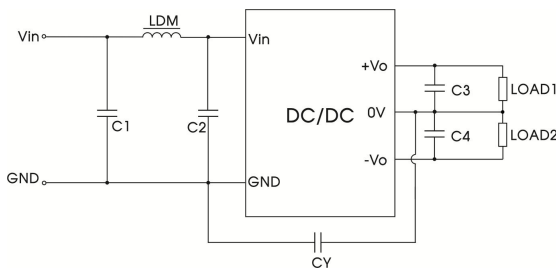


Fig. 4

Table 2: EMC recommended circuit value table


Emissions	C1/C2	4.7μF /50V
	CY	270pF /2kV
	C3/C4	Refer to the Cout in table 1
	LDM	6.8μH

3. For additional information please refer to DC-DC converter application notes on


[www.mornsun-power.com](http://www.mornsun-power.com)

### Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

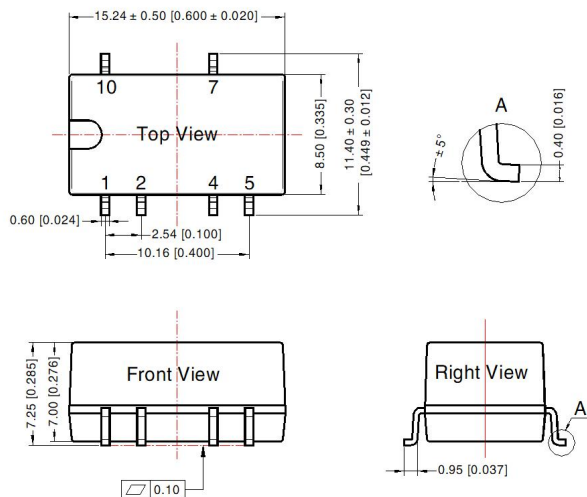

Note:  
Unit: mm[inch]  
Pin section tolerances:  $\pm 0.10$  [  $\pm 0.004$  ]  
General tolerances:  $\pm 0.25$  [  $\pm 0.010$  ]




Note: Grid 2.54\*2.54mm

Pin-Out	
Pin	Mark
1	GND
2	Vin
4	0V
5	-Vo
7	+Vo
10	NC

NC: Pin to be isolated from circuitry

## Tape and Reel Info

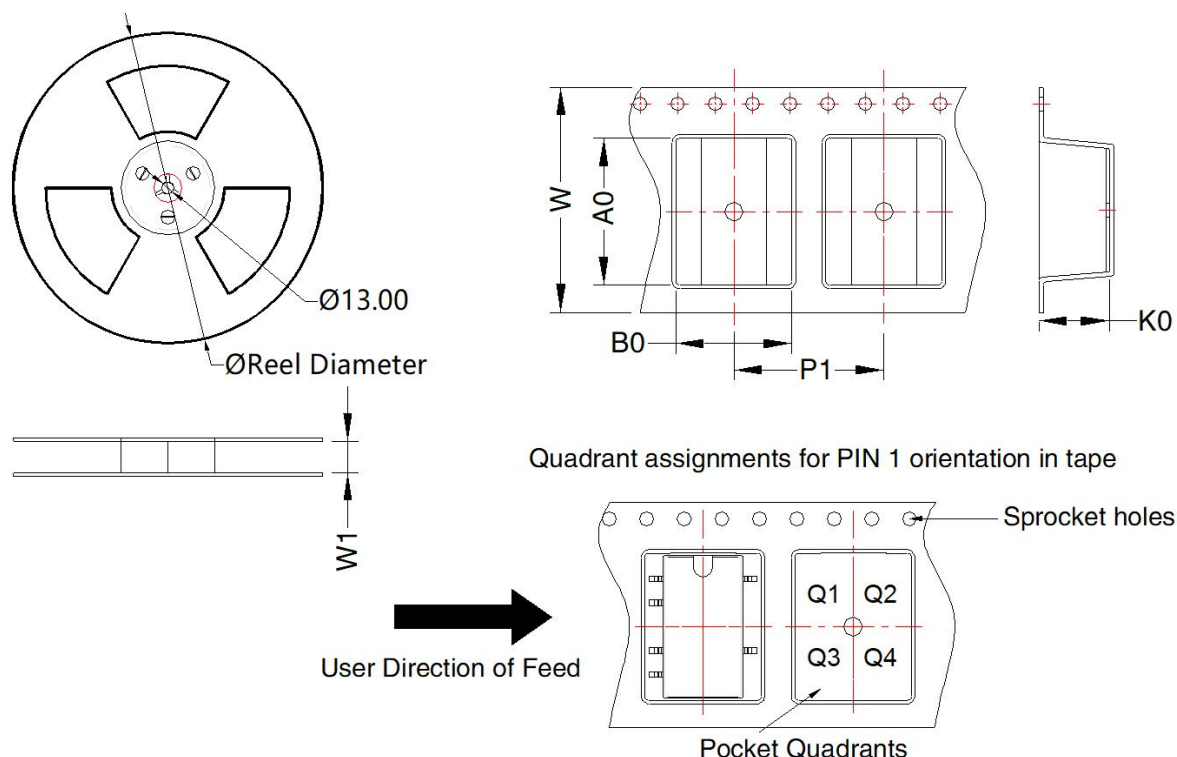

Device	Package Type	Pin	MPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
A_XT-1WR3-TR	SMD	6	500	330.0	24.5	15.64	12.4	7.45	16.0	24.0	Q1

### Note:

1. For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Roll Packaging bag number: 58210034 ;
2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
3. The maximum capacitive load offered were tested at input voltage range and full load;
4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25℃, humidity<75%RH with nominal input voltage and rated output load;
5. All index testing methods in this datasheet are based on our company corporate standards;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

## Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China  
Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: [info@mornsun.cn](mailto:info@mornsun.cn)

[www.mornsun-power.com](http://www.mornsun-power.com)