

1W Isolated DC-DC converter
Fixed input voltage, unregulated single output



Continuous Short
Circuit Protection



CE Report
EN62368-1

UKCA Report
BS EN62368-1

CB RoHS Patent Protection
IEC 62368-1

FEATURES

- Continuous short-circuit protection
- No-load input current as low as 8mA
- Operating ambient temperature range: -40°C to +105°C
- High efficiency up to 85%
- Compact SMD package
- I/O isolation test voltage: 1.5k VDC
- Industry standard pin-out

B_XT-1WR3(-TR) series are specially designed for applications where an isolated voltage is required in a distributed power supply system. They are suitable for: pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits.

Selection Guide

Certification	Part No.	Input Voltage (VDC)	Output		Full Load Efficiency (%) Min./Typ.	Capacitive Load(μF) Max.
		Nominal (Range)	Voltage (VDC)	Current (mA) Max./Min.		
EN/BS EN/IEC	B0303XT-1WR3 (-TR)	3.3 (2.97-3.63)	3.3	303/30	73/77	2400
	B0305XT-1WR3 (-TR)		5	200/20	78/82	2400
	B0309XT-1WR3 (-TR)		9	111/11	80/84	1000
EN/BS EN	B0312XT-1WR3 (-TR)		12	83/8	80/84	560
	B0315XT-1WR3 (-TR)		15	67/7	80/84	560
	B0324XT-1WR3 (-TR)		24	42/4	80/84	220
EN/BS EN/IEC	B0503XT-1WR3	5 (4.5-5.5)	3.3	303/30	70/74	2400
	B0505XT-1WR3		5	200/20	78/82	2400
	B0509XT-1WR3		9	111/12	79/83	1000
	B0512XT-1WR3		12	84/9	79/83	560
	B0515XT-1WR3		15	67/7	79/83	560
	B0524XT-1WR3		24	42/4	81/85	220
EN/BS EN	B0503XT-1WR3-TR	5 (4.5-5.5)	3.3	303/30	70/74	2400
	B0505XT-1WR3-TR		5	200/20	78/82	2400
	B0509XT-1WR3-TR		9	111/12	79/83	1000
	B0512XT-1WR3-TR		12	84/9	79/83	560
	B0515XT-1WR3-TR		15	67/7	79/83	560
	B0524XT-1WR3-TR		24	42/4	81/85	220
--	B1203XT-W2R3	12 (10.8-13.2)	3.3	76/7	60/66	2400
EN/BS EN	B1203XT-1WR3		3.3	303/30	72/76	2400
	B1205XT-1WR3 (-TR)		5	200/20	78/82	2400
EN/BS EN/IEC	B1209XT-1WR3 (-TR)		9	111/12	79/83	1000
	B1212XT-1WR3 (-TR)		12	84/9	79/83	560
	B1215XT-1WR3 (-TR)		15	67/7	79/83	560
	B1224XT-1WR3 (-TR)		24	42/4	81/85	220
EN/BS EN	B1505XT-1WR3 (-TR)	15 (13.5-16.5)	5	200/20	78/82	2400
	B1509XT-1WR3		9	111/12	78/82	1000
EN/BS EN/IEC	B1515XT-1WR3 (-TR)		15	67/7	79/83	560

EN/BS EN	B2403XT-1WR3		3.3	303/30	72/76	2400
EN/BS EN/IEC	B2405XT-1WR3 (-TR)	24 (21.6-26.4)	5	200/20	74/80	2400
	B2409XT-1WR3 (-TR)		9	111/12	74/80	1000
	B2412XT-1WR3 (-TR)		12	84/9	74/80	560
	B2415XT-1WR3 (-TR)		15	67/7	74/80	560
	B2424XT-1WR3 (-TR)		24	42/4	74/80	220

Note: * Product model suffix "-TR" indicates reel packaging.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	3.3VDC input	3.3VDC output	--	394/12	416/--	mA
		5VDC output	--	370/12	389/--	
		9VDC/12VDC/15VDC/24VDC output	--	361/12	379/--	
	5VDC input	3.3VDC/5VDC output	--	270/8	286/--	
		9VDC/12VDC output	--	241/12	254/--	
		15VDC/24VDC output	--	241/18	254/--	
	12VDC input	3.3V/5VDC output	--	102/8	107/--	
		9VDC/12VDC/15VDC output	--	101/8	106/--	
		24VDC output	--	99/8	103/--	
	15VDC input	5VDC/9VDC output	--	82/8	86/--	
		15VDC output	--	81/8	85/--	
	24VDC input	3.3V/5VDC output	--	53/8	57/--	
		9VDC/12VDC/15VDC output	--	51/8	55/--	
		24VDC output	--	53/8	57/--	
Reflected Ripple Current**	3.3VDC input		--	30	--	
	Other input		--	15	--	
Surge Voltage(1sec. max.)	3.3VDC input		-0.7	--	5	VDC
	5VDC input		-0.7	--	9	
	12VDC input		-0.7	--	18	
	15VDC input		-0.7	--	21	
	24VDC input		-0.7	--	30	
Input Filter			Capacitance filter			
Hot Plug			Unavailable			

Note: * Refer to DC-DC Converter Application Notes for detailed description of reflected ripple current test method.

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy			See output regulation curves (Fig. 1)			
Linear Regulation	Input voltage change: $\pm 1\%$		3.3VDC output	--	1.5	--
			Others	--	1.2	
Load Regulation	10%-100% load	3.3VDC input	3.3VDC output	--	15	%
			5VDC output	--	10	
			9VDC/12VDC/15VDC output	--	8	
			24VDC output	--	6	
	10%-100% load	5VDC input	3.3VDC output	--	15	
			5VDC output	--	10	
			9VDC output	--	8	
			12VDC output	--	7	
			15VDC output	--	6	
			24VDC output	--	5	

Load Regulation	10%-100% load	12VDC/15VDC/24VDC input	3.3VDC output	--	8	20	%
			5VDC output	--	5	15	
			9VDC output	--	3	10	
			12VDC output	--	3	10	
			15VDC output	--	3	10	
			24VDC output	--	2	10	
Ripple & Noise*	20MHz bandwidth	3.3VDC input		--	50	100	mVp-p
		5VDC input	Other output	--	30	75	
			24VDC output	--	50	100	
		12VDC/15VDC/24VDC input	3.3VDC/5VDC/9VDC/12VDC/15VDC output	--	30	75	
			24VDC output	--	50	100	
Temperature Coefficient	Full load			--	±0.02	--	%/℃
Short-Circuit Protection				Continuous, self-recovery			
Note:* The “parallel cable” method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.							

General Specifications

Item	Operating Conditions			Min.	Typ.	Max.	Unit
Isolation	Input-output electric strength test for 1 minute with a leakage current of 1mA max.			1500	--	--	VDC
Insulation Resistance	Input-output resistance at 500VDC			1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V			--	20	--	pF
Operating Temperature	3.3VDC input	Derating when operating temperature≥85℃, (see Fig. 2)		-40	--	105	℃
	Other input	Derating when operating temperature≥100℃, (see Fig. 2)					
Storage Temperature				-55	--	125	
Case Temperature Rise	Ta=25℃	5VDC input	3.3VDC output	--	25	--	
			Other output	--	15	--	
		Other input	--	25	--		
Storage Humidity	Non-condensing	5VDC input	--	--	95	%RH	
		Other input	5	--	95		
Reflow Soldering Temperature*				Peak temp.≤245℃, maximum duration time≤60s over 217℃			
Vibration	3.3VDC/12VDC/15VDC/24VDC input			10-150Hz, 5G, 0.75mm. along X, Y and Z			
Switching Frequency	Full load, nominal input voltage	3.3VDC input		--	220	--	kHz
		5VDC input		--	270	--	
		12VDC/15VDC/24VDC input		--	260	--	
MTBF	MIL-HDBK-217F@25℃			3500	--	--	k hours
Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-020D.1			Level 1			
Note: *Please refer to IPC/JEDEC J-STD-020D.1.							

Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94V-0)					
Dimensions	13.20 x 11.40 x 7.25 mm					
Weight	1.4g(Typ.)					
Cooling Method	Free air convection					

Electromagnetic Compatibility

Emissions	CE		CISPR32/EN55032	CLASS B		
	RE		CISPR32/EN55032	CLASS B		
Immunity	ESD	Other input	IEC/EN61000-4-2	Air ±8kV, Contact ±6kV	perf. Criteria B	
		5V input	IEC/EN61000-4-2	Air ±8kV, Contact ±4kV	perf. Criteria B	
Note: Refer to Fig. 4 for recommended circuit test.						

Typical Performance Curves

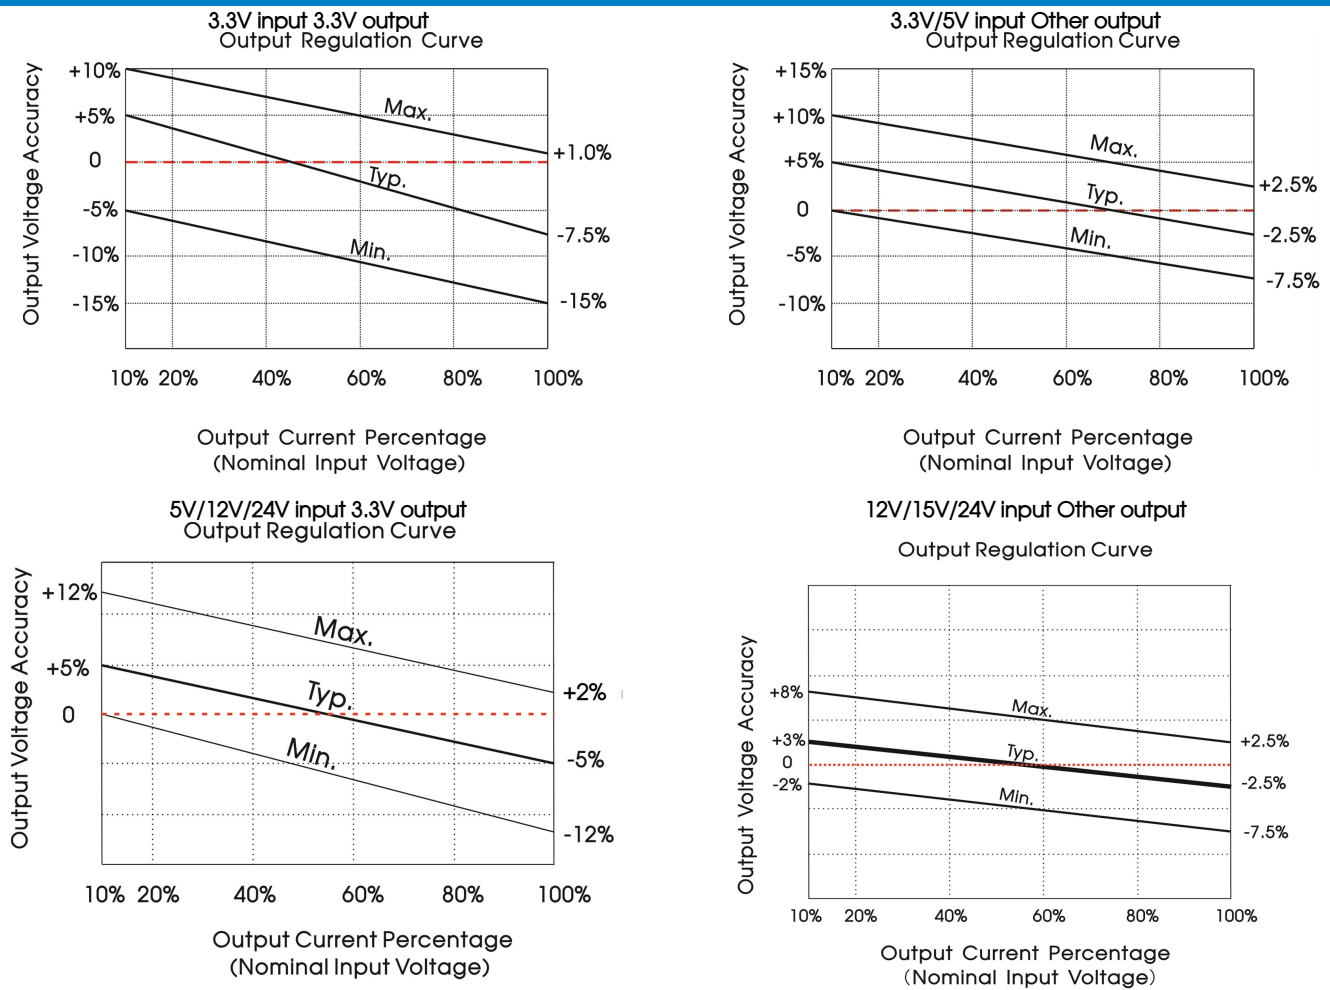


Fig. 1









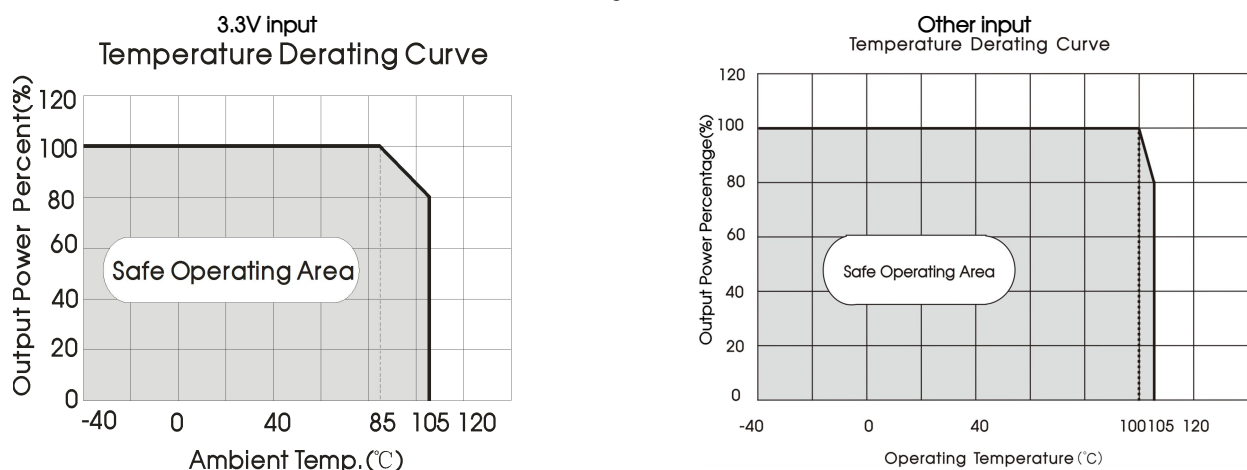


Fig. 2

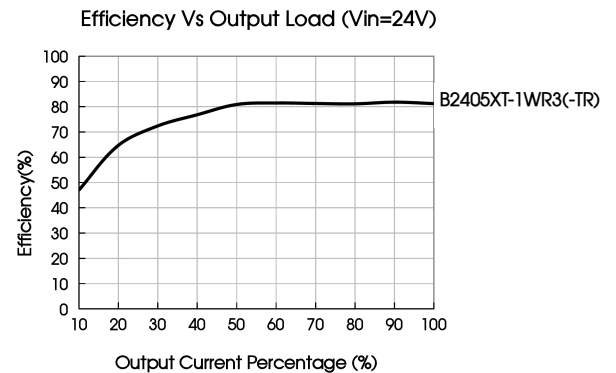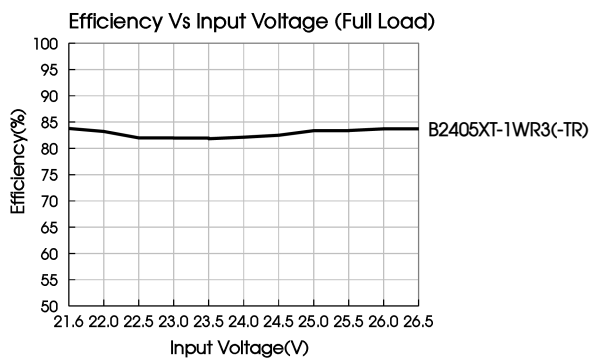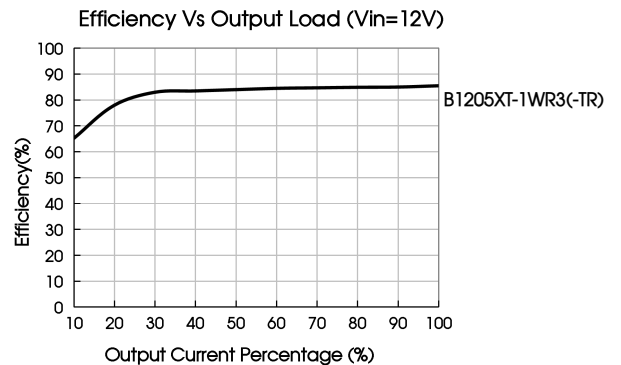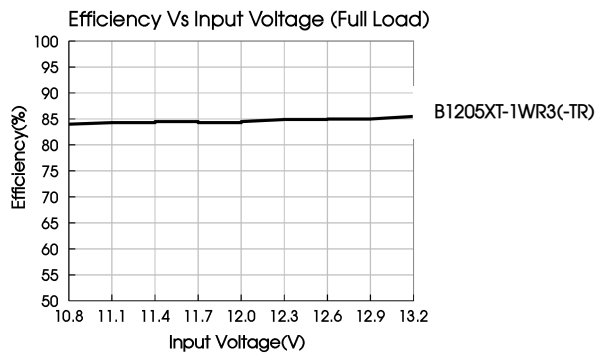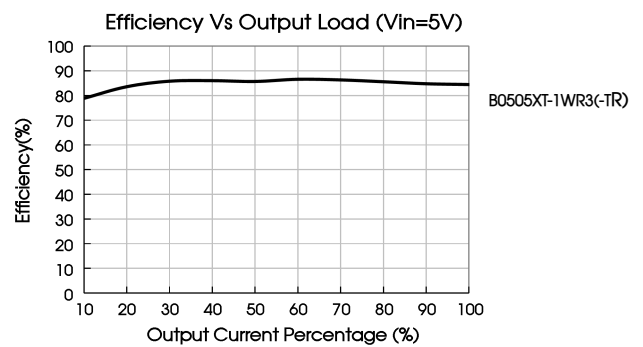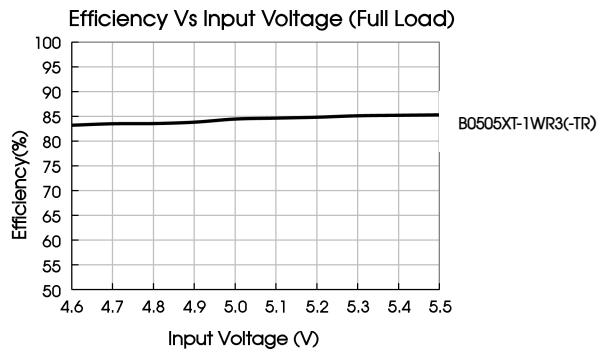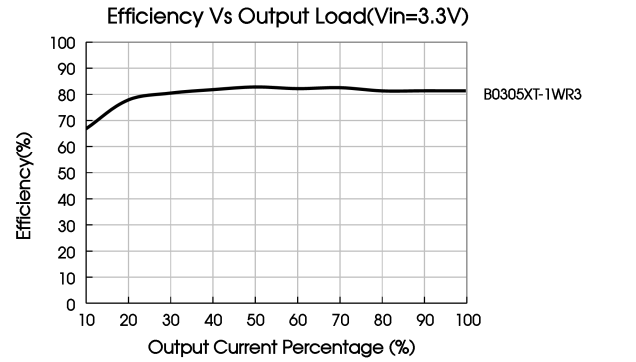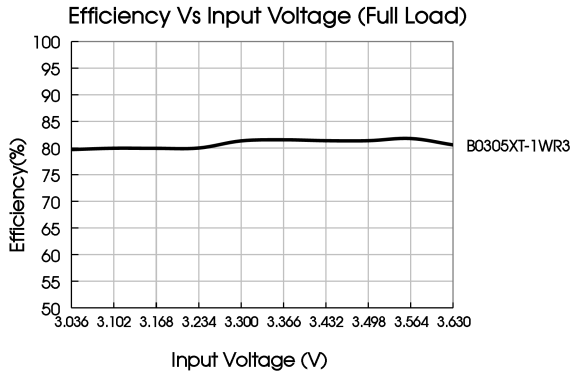

Design Reference

1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig. 3.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.

Table 1: Recommended input and output capacitor values

Vin	Cin	Vo	Cout
3.3VDC	4.7μF/16V	3.3V/5VDC	10μF/16V
5VDC	4.7μF/16V	9VDC	2.2μF/16V
12VDC	2.2μF/25V	12VDC	2.2μF/25V
15VDC	2.2μF/25V	15VDC	1μF/25V
24VDC	1μF/50V	24VDC	1μF/50V

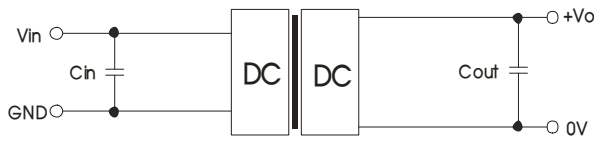


Fig. 3

2. EMC compliance circuit

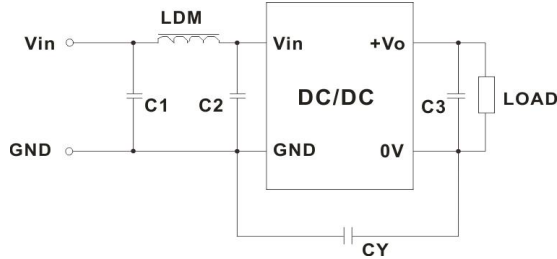


Fig. 4

Table 2: EMC recommended circuit value table

Input voltage	Input voltage 3.3VDC	Input voltage 5VDC	Input voltage 12/15/24VDC
Output voltage	—	3.3/5/9VDC	12/15/24VDC
Emissions	C1, C2	4.7μF/16V	4.7μF/25V
	CY	270pF/2kV	100pF/2kV
	C3	1000pF/2kV	270pF/2kV
	LDM	Refer to the Cout in table 1	
		6.8μH	


Note: In the case of actual use, the requirements for EMI are high, it is subject to CY.

3. For additional information please refer to DC-DC converter application notes on

www.mornsun-power.com

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

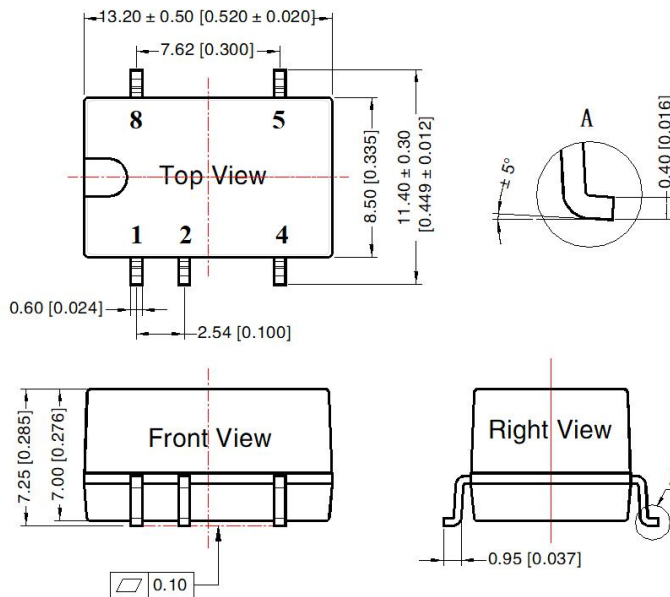


Note:

Unit: mm[inch]

Pin section tolerances: $\pm 0.10 [\pm 0.004]$

General tolerances: $\pm 0.25 [\pm 0.010]$

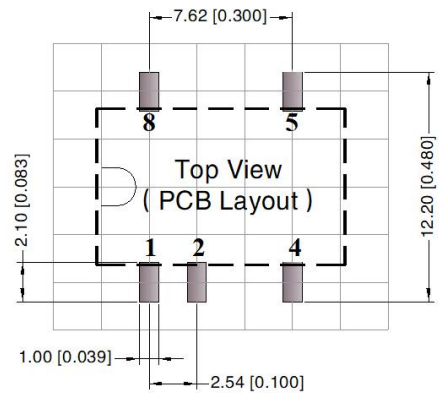


Note: Grid 2.54*2.54mm

Pin-Out	
Pin	Mark
1	GND
2	Vin
4	0V
5	+Vo
8	NC

NC: Pin to be isolated from circuitry

Tape and Reel Info

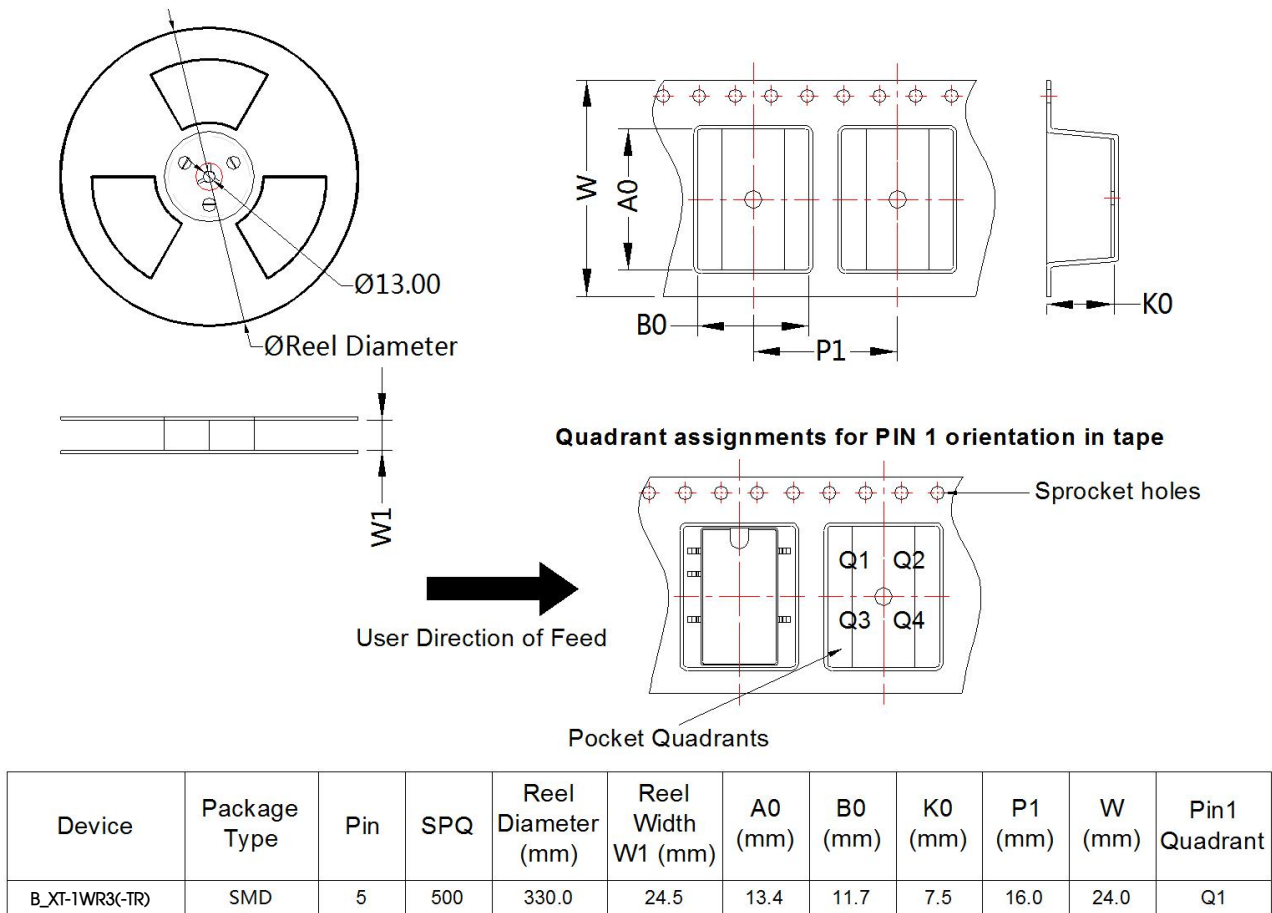

Notes:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Tube Packaging bag number: 58210024, Roll Packaging bag number: 58200054;
2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
3. The maximum capacitive load offered were tested at input voltage range and full load;
4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
5. All index testing methods in this datasheet are based on our company corporate standards;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com