

### Common Mode Filter



RoHS



### FEATURES

- High reliability
- Ultra working current
- Excellent isolation voltage
- Effective anti-interference
- Good temperature characteristic (-40°C~+105°C)

The filter is suitable for applications that are sensitive to noise, such as analog circuits, and the EMC level can be significantly improved by adding a product to the input end of the power module.

### Selection Guide

Model	Inductance (mH)(min)	Inductance (mH)(typ)	Current (A)(max)	DCR(mΩ)(max)	Weight (g)(typ)	Size(mm)(L x W x H)
FL2D-A0-102	0.65*2	1*2	10	10*2	25.0g	30.5 x 30.5 x 16.5 See Figure1
FL2D-A0-332	2.1*2	3.3*2	10	15*2	31.6g	30.5 x 30.5 x 18.0 See Figure2
FL2D-A0-562	3.6*2	5.6*2	10	20*2	41.6g	30.5 x 30.5 x 21.5 See Figure3
FL2D-A0-103	6.5*2	10*2	10	25*2	60.8g	38.0 x 38.0 x 22.0 See Figure4
FL2D-A5-102	0.65*2	1*2	15	10*2	35.2g	31.5 x 31.5 x 20.5 See Figure5
FL2D-A5-332	2.1*2	3.3*2	15	15*2	59.0g	38.5 x 38.5 x 22.0 See Figure6
FL2D-A5-472	3.0*2	4.7*2	15	20*2	64.8g	38.5 x 38.5 x 22.0 See Figure7
FL2D-A5-562	3.6*2	5.6*2	15	20*2	68.8g	38.5 x 38.5 x 23.0 See Figure8


### General Specifications

Item	Test Conditions	Min.	Typ.	Max.	Unit
Operating Temperature *		-40	--	+105	°C
Storage Temperature		-40	--	+105	
Storage Humidity	Non-condensing	--	--	95	%
Inductance Error Range	fo=10KHz, Uo=0.1V	--	35	--	%
Isolation Voltage (COIL-COIL)	Electric strength test for 1 minute with a leakage current of 5mA max	--	--	1500	VAC
Vibration		10~55Hz, 10g, X,Y,Z direction			
Warranty	Ambient temperature: <40°C	3 years			


Note: \*1.Operating Temperature range includes inductor self heating.

2.The dispensing advice added fixed when using this product.


### Schematic Diagram Of Pin Mark

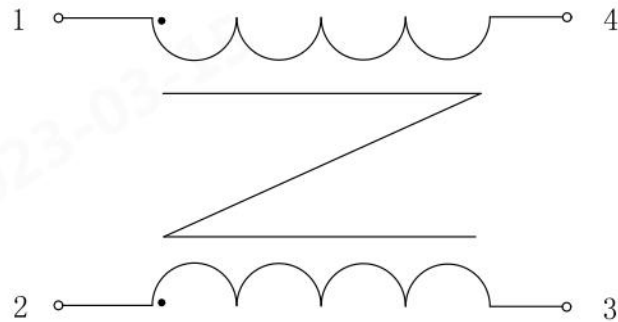


### FL2D-A0-xxx Insertion Loss Specifications (reference value )

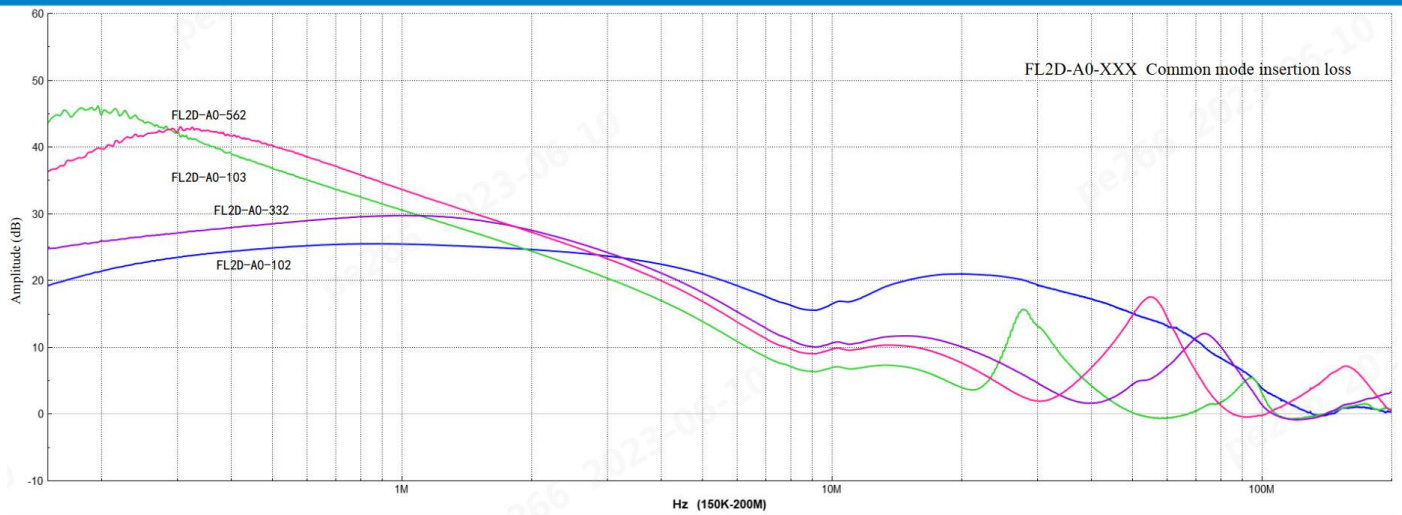


### FL2D-A0-xxx Insertion Loss Specifications (reference value )

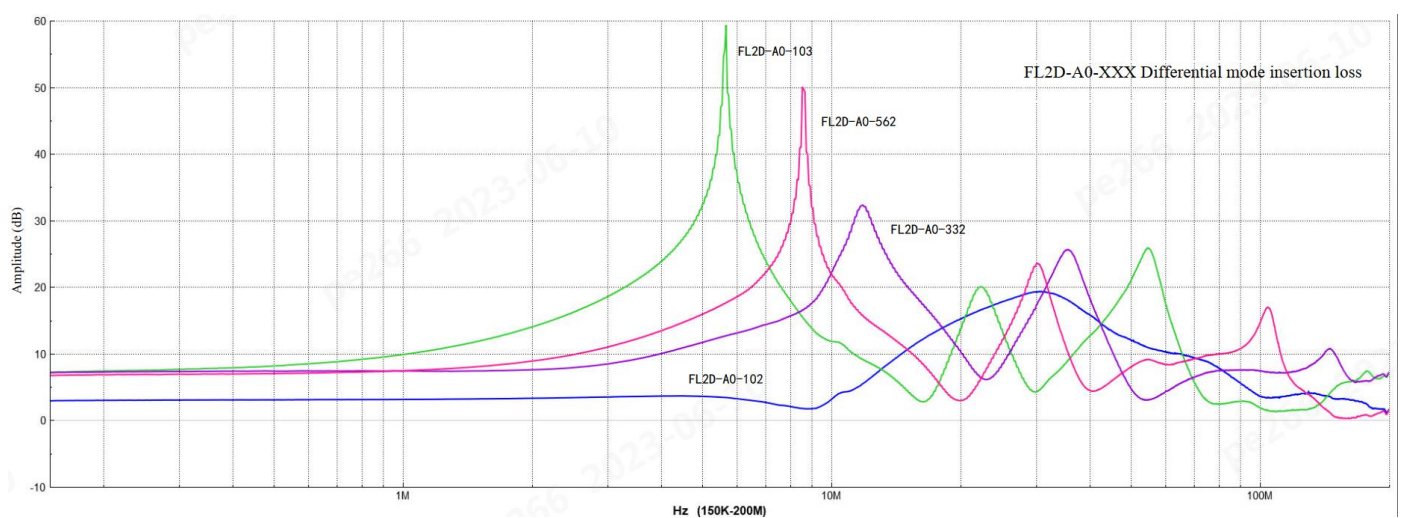

FL2D-A5-xxx Insertion Loss Specifications (reference value )

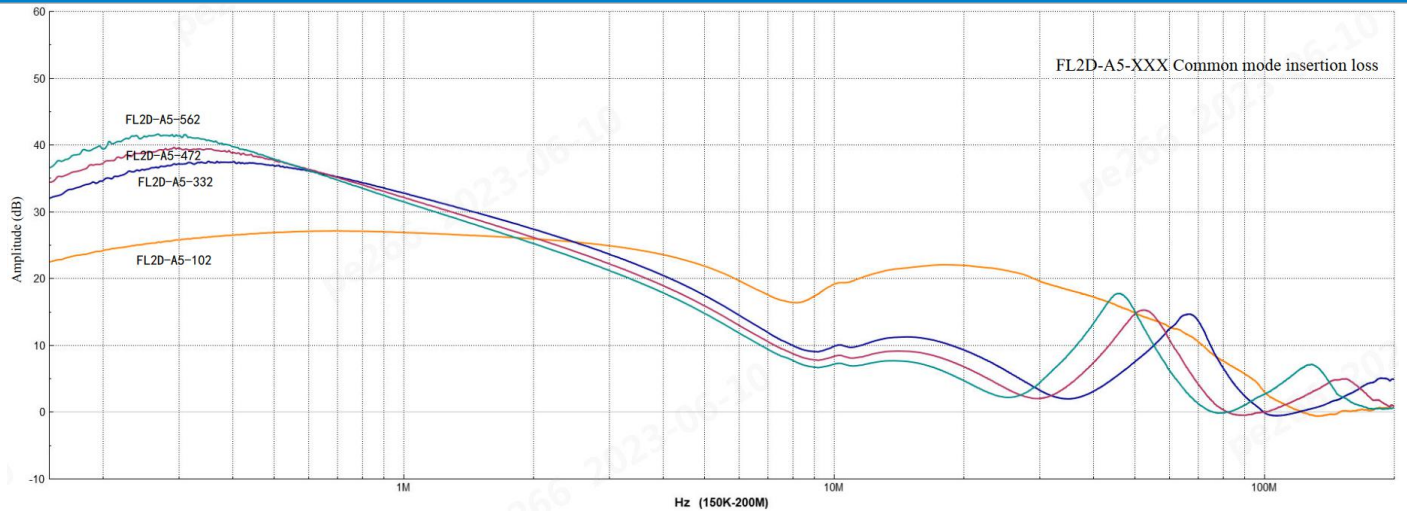

FL2D-A5-xxx Insertion Loss Specifications (reference value )

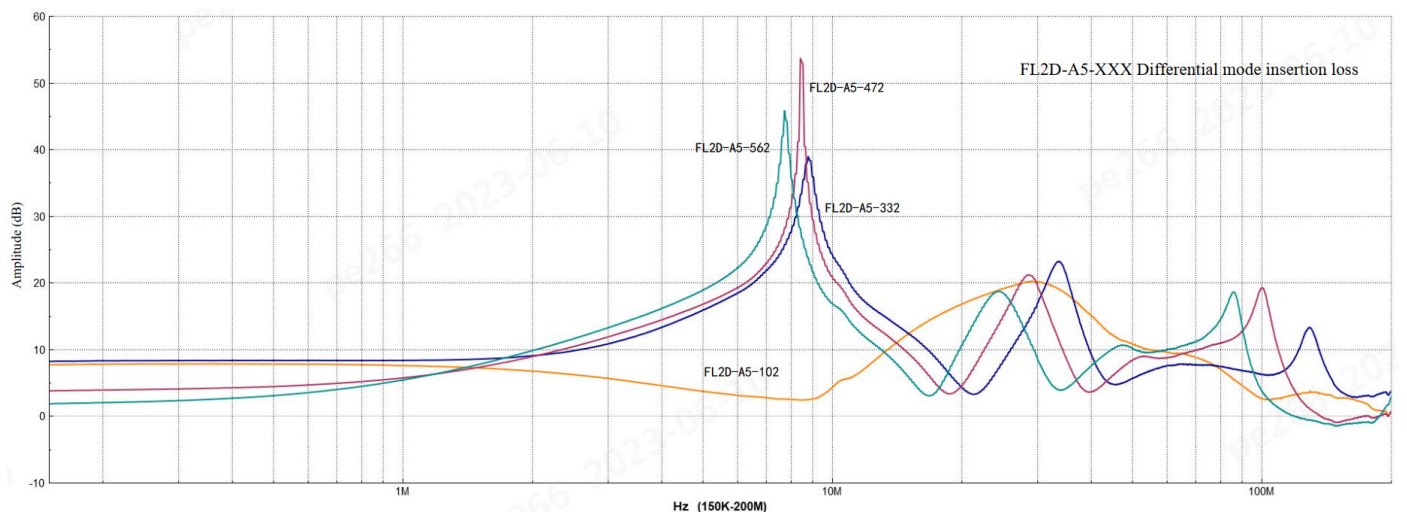

FL2D-A0-102 Schematic Diagram Of Pin Mark

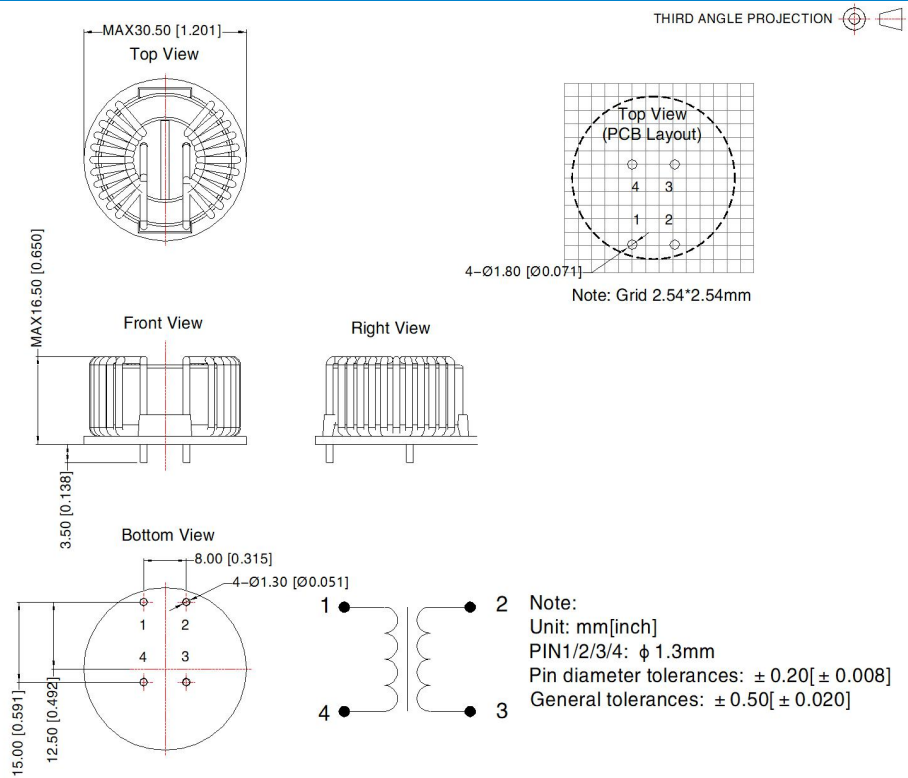


Fig. 1

FL2D-A0-332 Schematic Diagram Of Pin Mark

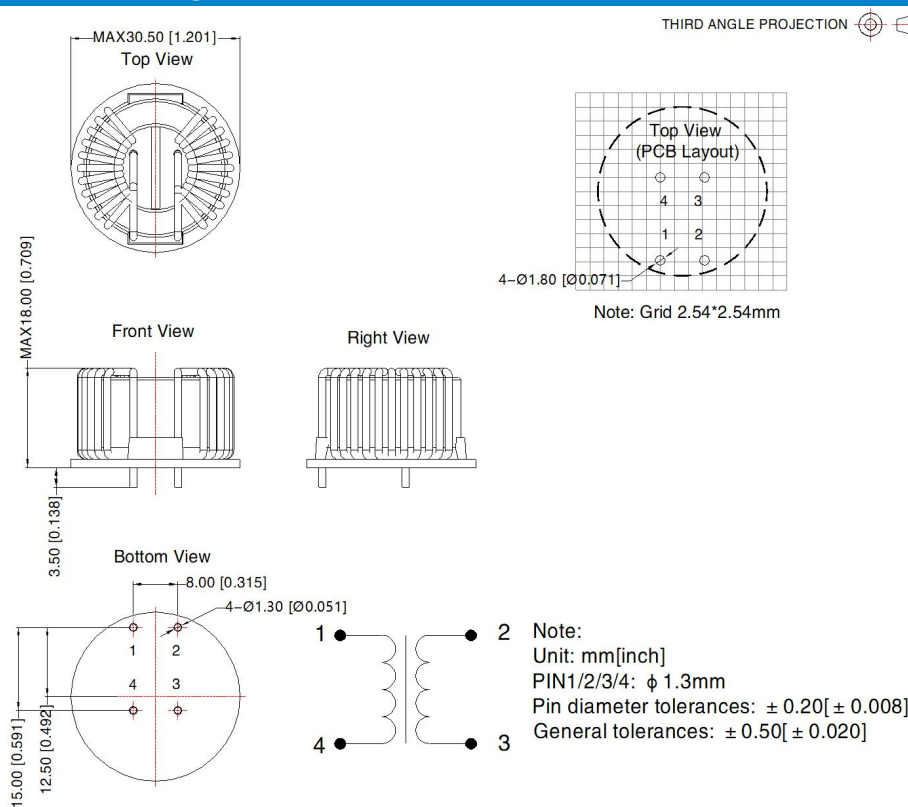


Fig. 2

FL2D-A0-562 Schematic Diagram Of Pin Mark

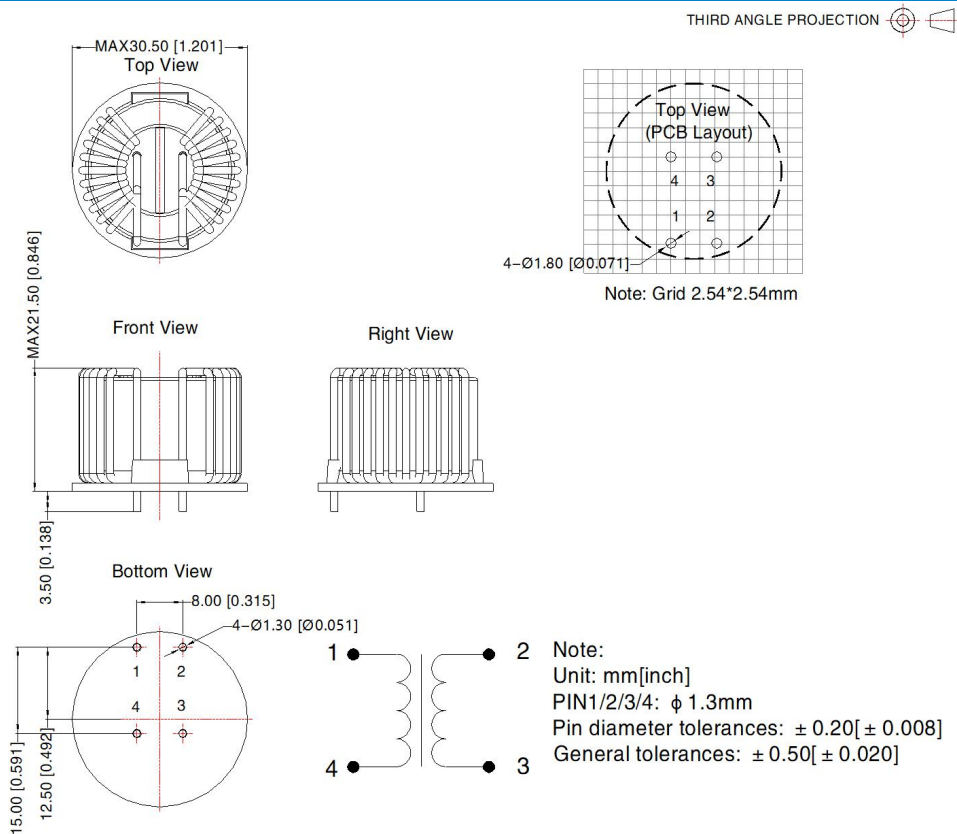


Fig. 3

FL2D-A0-103 Schematic Diagram Of Pin Mark

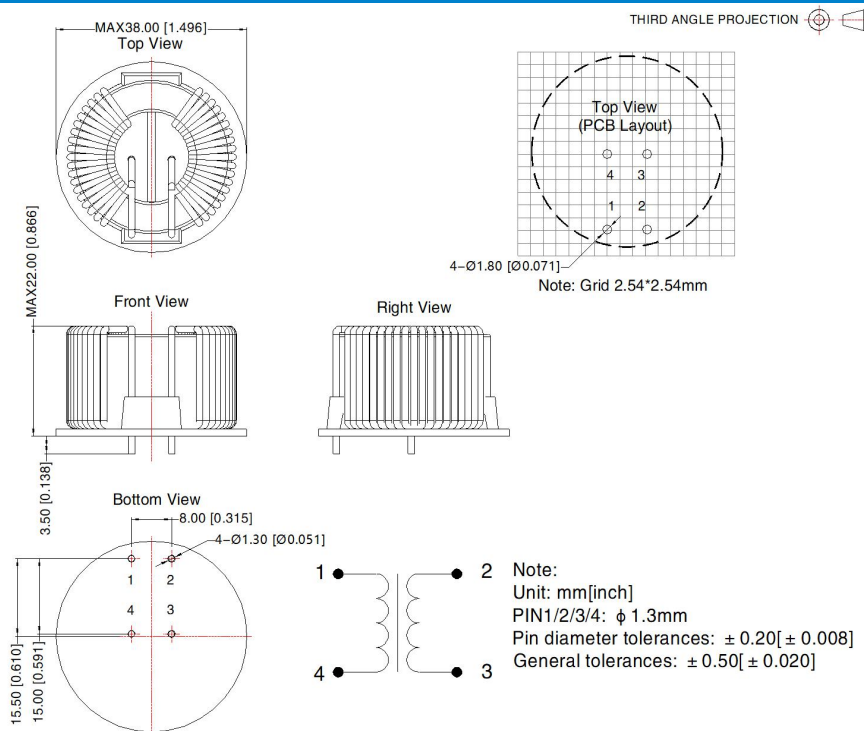


Fig. 4

FL2D-A5-102 Schematic Diagram Of Pin Mark

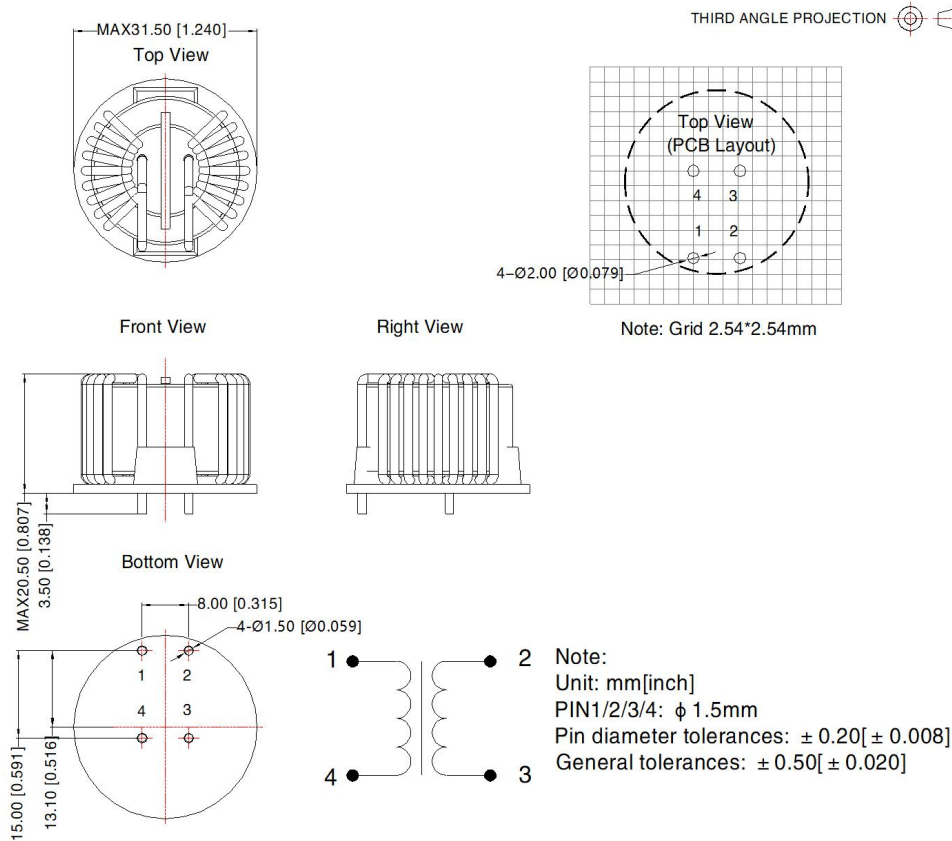


Fig. 5

FL2D-A5-332 Schematic Diagram Of Pin Mark

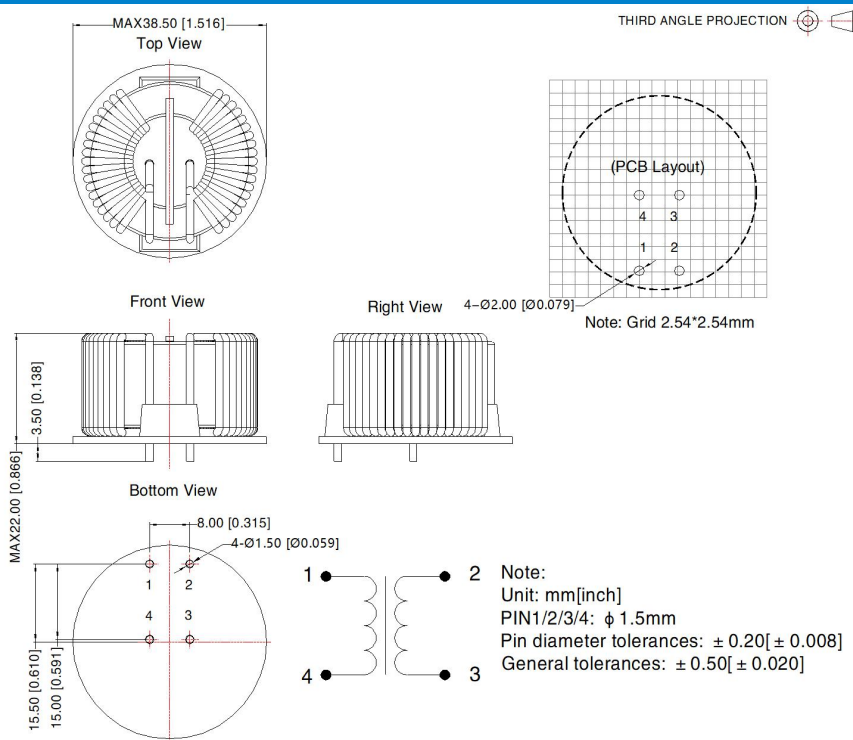


Fig. 6

FL2D-A5-472 Schematic Diagram Of Pin Mark

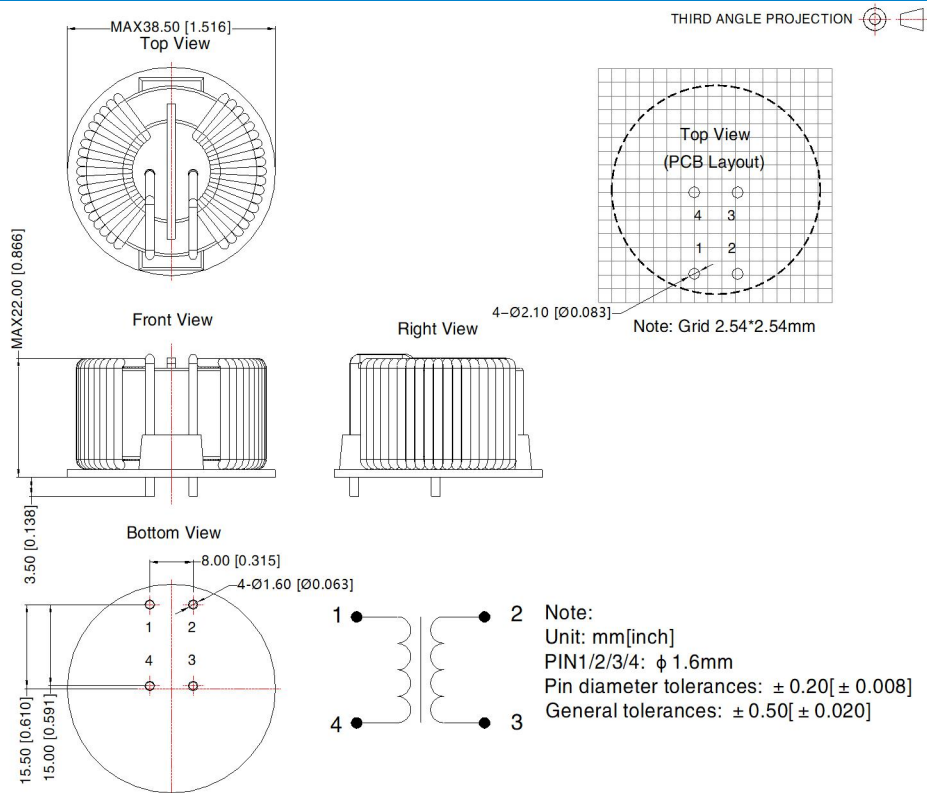


Fig. 7

FL2D-A5-562 Schematic Diagram Of Pin Mark

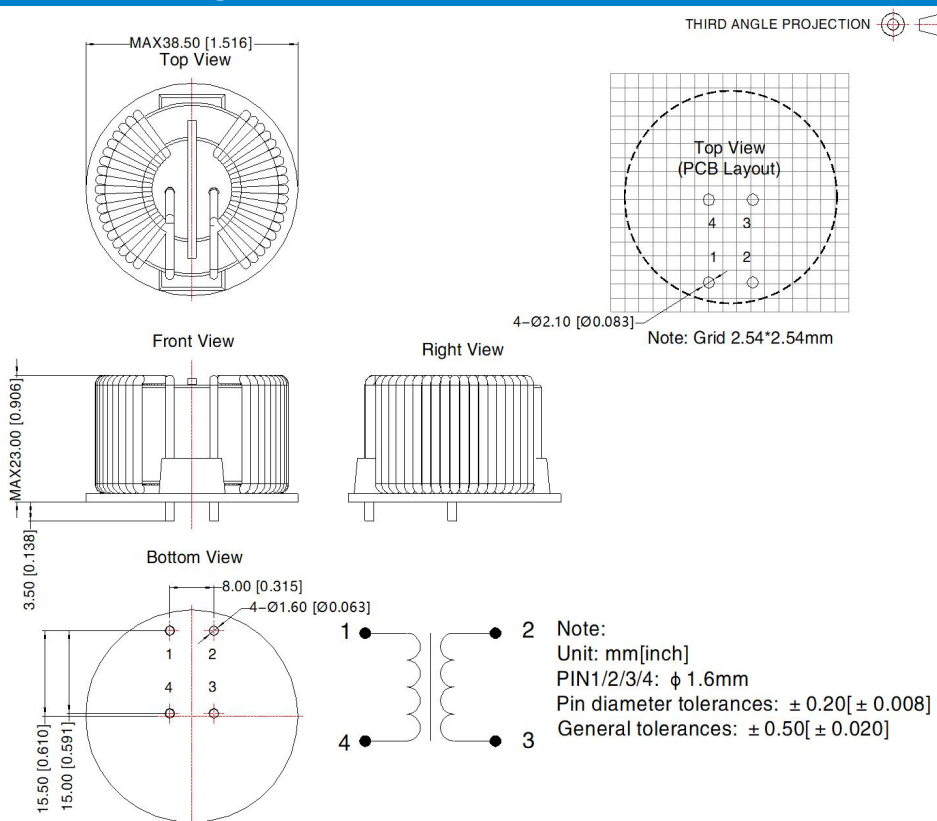


Fig. 8

Note:

1. For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58240096 (FL2D-A0-102, FL2D-A0-332, FL2D-A0-562, FL2D-A5-102) ; 58240094 (FL2D-A0-103, FL2D-A5-332, FL2D-A5-472, FL2D-A5-562) ; 58240100 (FL2D-A0-102, FL2D-A0-332)
2. Unless otherwise specified, data in this data sheet should be tested under the conditions of Ta=25°C, humidity<75%RH;
3. All index testing methods in this datasheet are based on company corporate standards;
4. The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, and please directly contact our technicians for specific information;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" ;
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

## Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: [info@mornsun.cn](mailto:info@mornsun.cn)

[www.mornsun-power.com](http://www.mornsun-power.com)