

DC/DC Converter

F_XT-2WR3 Series

MORNSUN®

2W isolated DC-DC converter
Fixed input voltage, unregulated single output



Continuous Short
Circuit Protection



CE Report
EN62368-1

UK Report
BS EN62368-1

RoHS Patent Protection

FEATURES

- Continuous short-circuit protection
- No-load input current as low as 8mA
- Operating ambient temperature range:
-40°C to +105°C
- High efficiency up to 86%
- Compact SMD package
- I/O isolation test voltage 3k VDC
- Industry standard pin-out

F_XT-2WR3 series are designed for use in distributed power supply systems and especially suitable in applications such as pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits.

Selection Guide

Certification	Part No.	Input Voltage (VDC)	Output		Full Load Efficiency (%) Min./Typ.	Capacitive Load (μF)Max.
		Nominal (Range)	Voltage (VDC)	Current(mA) Max./Min.		
EN/BS EN	F0503XT-2WR3(-TR)	5 (4.5-5.5)	3.3	400/40	74/78	2400
	F0505XT-2WR3(-TR)		5	400/40	80/84	2400
	F05X7XT-2WR3(-TR)		7	286/29	80/84	1000
	F0509XT-2WR3(-TR)		9	222/22	81/85	1000
	F0512XT-2WR3(-TR)		12	167/17	81/85	560
	F0515XT-2WR3(-TR)		15	133/13	82/86	560
	F0524XT-2WR3(-TR)		24	83/8	82/86	220
EN/BS EN	F1205XT-2WR3	12 (10.8-13.2)	5	400/40	79/83	2400
EN	F1206XT-2WR3		6	333/33	79/83	1000
	F1209XT-2WR3		9	222/22	79/83	1000
EN/BS EN	F1212XT-2WR3		12	167/17	80/84	560
	F1215XT-2WR3		15	133/13	80/84	560
	F1224XT-2WR3		24	83/8	81/85	220
EN	F1505XT-2WR3	15 (13.5-16.5)	5	400/40	79/83	2400
	F1515XT-2WR3		15	133/13	80/84	560
EN/BS EN	F2405XT-2WR3	24 (21.6-26.4)	5	400/40	77/83	2400
EN	F2409XT-2WR3		9	222/22	77/83	1000
EN/BS EN	F2412XT-2WR3		12	167/17	78/84	560
	F2415XT-2WR3		15	133/13	78/84	560
	F2424XT-2WR3		24	83/8	79/85	220

Note: * Product model suffix "-TR" indicates reel packaging.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	5VDC input	3.3VDC output	--	339/8	357/--	mA
		5VDC/7VDC output	--	477/8	500/--	
		9VDC/12VDC output	--	471/8	494/--	
		15VDC/24VDC output	--	466/8	488/--	
	12VDC input	5VDC/6VDC/9VDC output	--	201/8	211/--	
		12VDC/15VDC output		199/8	209/--	
		24VDC output		196/8	206/--	
	15VDC input	5VDC output	--	161/8	169/--	
		15VDC output		159/8	167/--	

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2025.01.17-A/4

Page 1 of 6

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Input Current (full load / no-load)	24VDC input	5VDC/9VDC output	--	101/8	109/--	mA
		12VDC/15VDC output		99/8	107/--	
		24VDC output		98/8	106/--	
Reflected Ripple Current*	5VDC input		--	15	--	
	12/15/24VDC input		--	30	--	
Surge Voltage (1sec. max.)	5VDC input		-0.7	--	9	VDC
	12VDC input		-0.7	--	18	
	15VDC input		-0.7	--	21	
	24VDC input		-0.7	--	30	
Input Filter			Capacitance filter			
Hot Plug			Unavailable			
Note: * Refer to DC-DC Converter Application Notes for detailed description of reflected ripple current test method.						

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy			See output regulation curve (Fig. 1)			
Linear Regulation	Input voltage change: $\pm 1\%$	3.3VDC output	--	--	± 1.5	--
		5VDC/7VDC/9VDC/12VDC/15VDC/24VDC output	--	--	± 1.2	
Load Regulation	10%-100% load	5VDC input	3.3VDC output	--	10	%
			5VDC/7VDC output	--	9	
			9VDC output	--	8	
			12VDC/15VDC output	--	7	
			24VDC output	--	6	
	12/15/24V DC input	5VDC output	5VDC output	--	7	%
			6VDC output	--	7	
			9VDC output	--	6	
			12VDC output	--	5	
			15VDC output	--	4	
Ripple & Noise*	20MHz bandwidth	5VDC input	--	75	200	mVp-p
		12/15/24VDC input	--	50	150	
Temperature Coefficient	Full load		--	± 0.02	--	%/ $^{\circ}\text{C}$
Short-circuit Protection			Continuous, self-recovery			

Note: * The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input-output electric strength test for 1 minute with a leakage current of 1mA max.		3000	--	--	VDC
Insulation Resistance	Input-output resistance at 500VDC		1000	--	--	M Ω
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V		--	20	--	pF
Operating Temperature	See Fig. 2		-40	--	105	$^{\circ}\text{C}$
Storage Temperature			-55	--	125	
Case Temperature Rise	Ta=25 $^{\circ}\text{C}$, nominal input voltage, full load		--	25	--	
Storage Humidity	Non-condensing		5	--	95	%RH
Reflow Soldering Temperature*			Peak temp. Tc $\leq 245^{\circ}\text{C}$, maximum duration time $\leq 60\text{s}$ over 217 $^{\circ}\text{C}$			
Vibration			10-150Hz, 5G, 0.75mm. along X, Y and Z			
Switching Frequency	Full load, nominal input voltage	5VDC input	--	220	--	kHz
		12/15/24VDC input	--	260	--	
MTBF	MIL-HDBK-217F@25 $^{\circ}\text{C}$		3500	--	--	k hours
Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-020D.1		Level 1			

Note: * See also IPC/JEDEC J-STD-020D.1.

Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94V-0)
Dimensions	13.20 x 11.40 x 7.25 mm
Weight	1.4g(Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B
	RE	CISPR32/EN55032	CLASS B
Immunity	ESD	IEC/EN61000-4-2	Air $\pm 8\text{kV}$, Contact $\pm 6\text{kV}$ perf. Criteria B

Note: Refer to Fig. 4 for recommended circuit test.

Typical Characteristic Curves







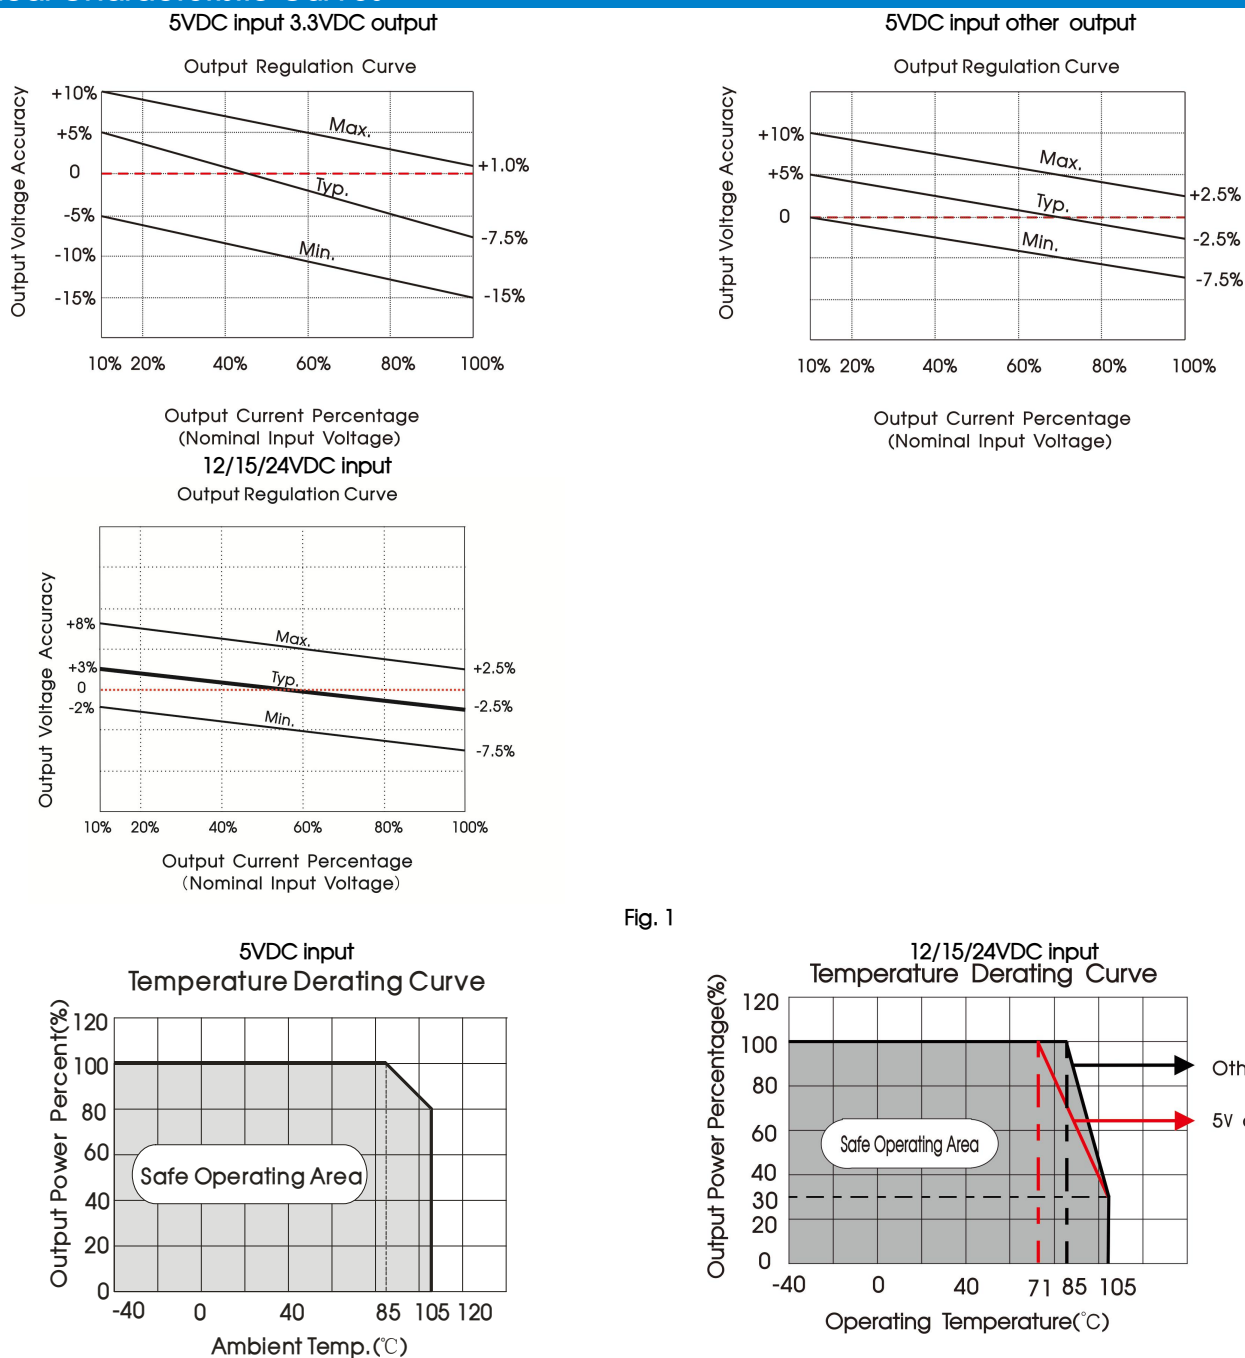


Fig. 1

Fig. 2

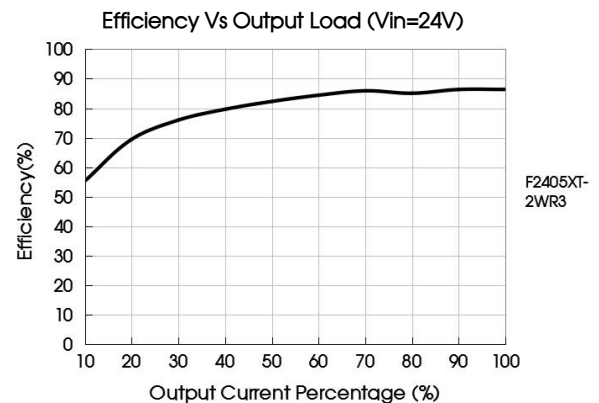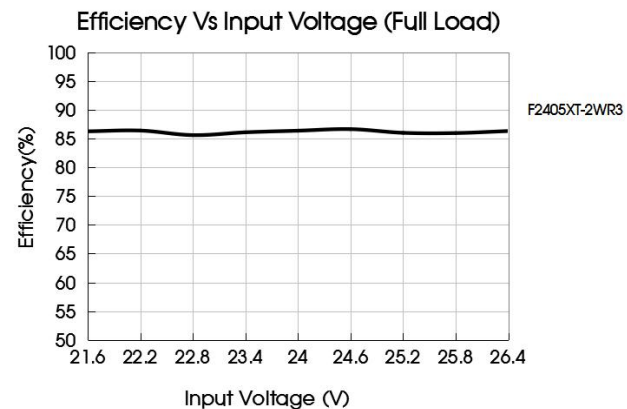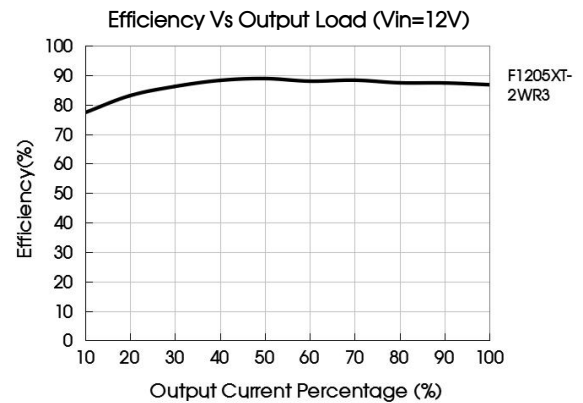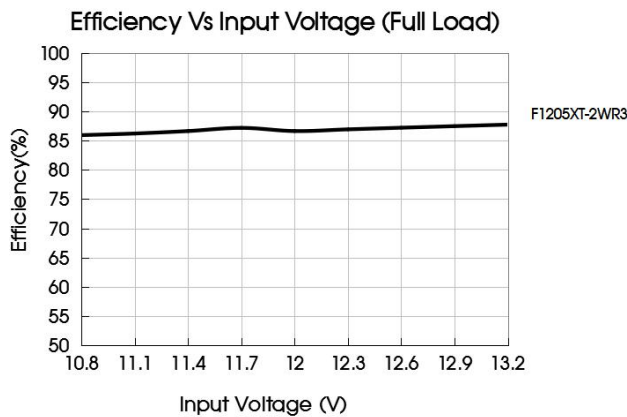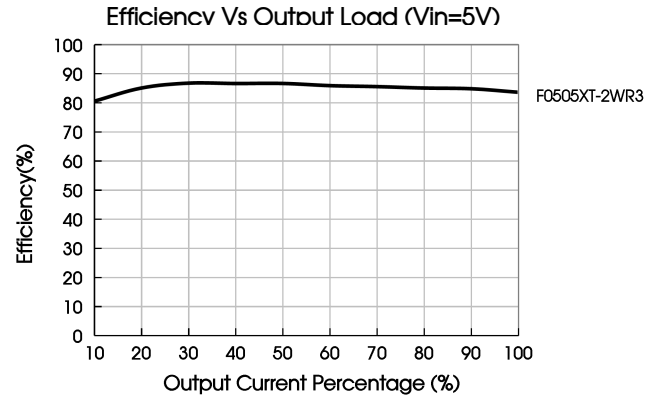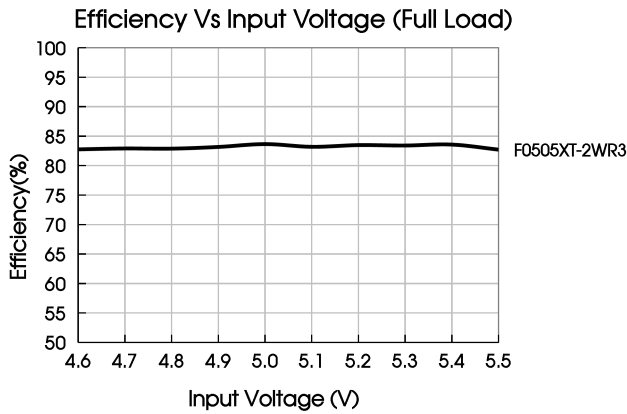

Design Reference

1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig. 3.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.



Fig. 3

Table 1: Recommended input and output capacitor values

Vin	Cin	Vo	Cout
5VDC	4.7μF/16V	3.3VDC	10μF/16V
12VDC	2.2μF/25V	5VDC	10μF/16V
15VDC	1μF/25V	6VDC	2.2μF/25V
24VDC	1μF/50V	7VDC	4.7μF/16V
--	--	9VDC	2.2μF/25V
--	--	12VDC	2.2μF/25V
--	--	15VDC	1μF/25V
--	--	24VDC	0.47μF/50V

2. EMC compliance circuit


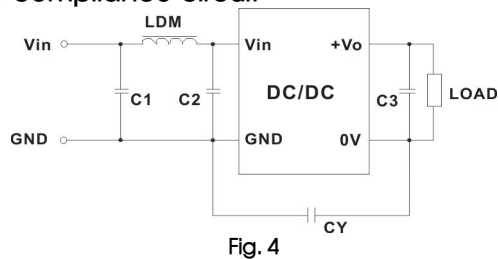


Fig. 4


Input Voltage		5VDC	12/15/24VDC
Emissions	C1/C2	4.7μF /16V	4.7μF /50V
	C3	Refer to the Cout in Fig. 3	
	CY	270pF/4kV	270pF /4kV
	LDM	6.8μH	

3. For additional information please refer to DC-DC converter application notes on www.mornsun-power.com

Dimensions and Recommended Layout

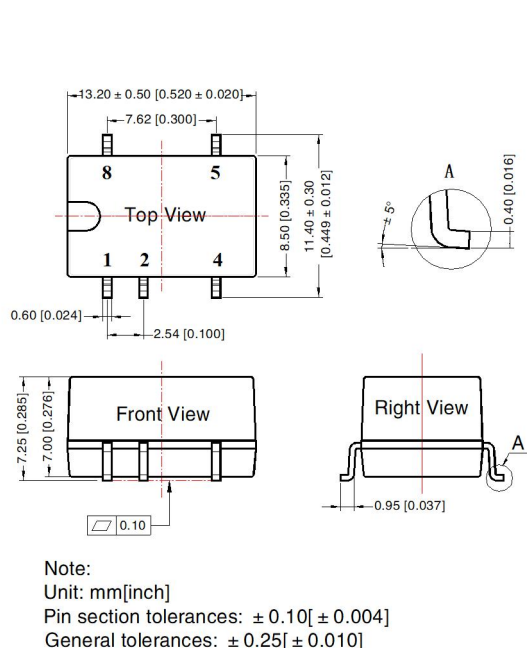

THIRD ANGLE PROJECTION




Note: Grid 2.54*2.54mm

Pin-Out	
Pin	Mark
1	GND
2	Vin
4	0V
5	+Vo
8	NC

NC: Pin to be isolated from circuitry

Tape and Reel Info

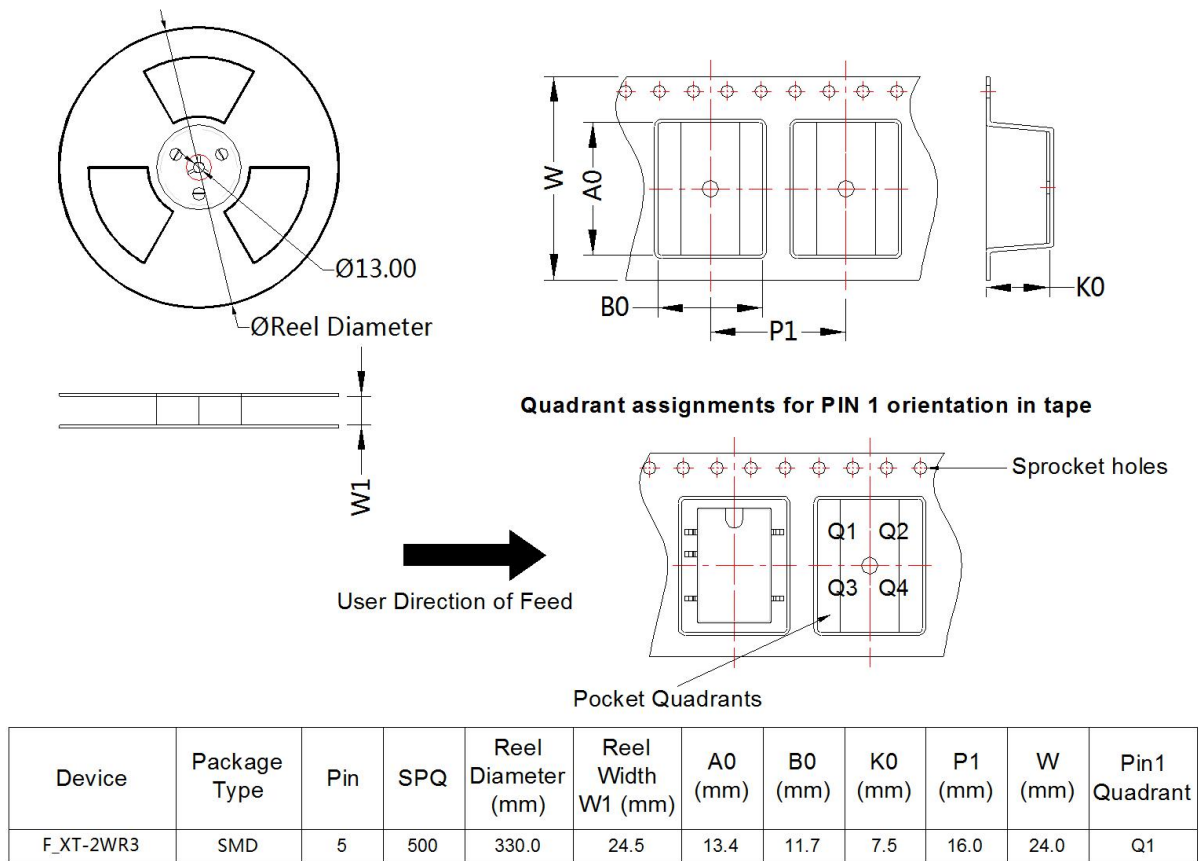

Notes:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Tube Packaging bag number: 58210024, Roll Packaging bag number: 58200054;
2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
3. The maximum capacitive load offered were tested at input voltage range and full load;
4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
5. All index testing methods in this datasheet are based on our company corporate standards;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com