

1W isolated DC-DC converter

Fixed input voltage, regulated single output



Continuous Short Circuit Protection



RoHS Patent Protection

FEATURES

- Continuous short-circuit protection
- No-load input current as low as 8mA
- Operating ambient temperature range: -40°C to +85°C
- High efficiency up to 75%
- I/O isolation test voltage 3k VDC
- Industry standard pin-out



CB

UL 62368-1

EN 62368-1

BS EN 62368-1

IEC 62368-1

IF_S-1WR3 series is especially designed for distributed power supply systems where an isolated voltage is required. They are suitable for occasions of: pre-interference isolation, ground interference elimination, pure digital circuit, voltage isolation conversion, general low frequency analog circuit, relay drive circuit, etc.

Selection Guide

Certification	Part No.	Input Voltage (VDC)	Output		Full Load Efficiency (%) Min./Typ.	Capacitive Load (μF) Max.
		Nominal (Range)	Voltage (VDC)	Current (mA) Max./Min.		
EN/BS EN	IF0503S-1WR3	5 (4.75-5.25)	3.3	250/25	63/67	2400
	IF0505S-1WR3		5	200/20	66/70	2400
	IF0509S-1WR3		9	111/12	67/71	1000
	IF0512S-1WR3		12	84/9	68/72	560
	IF0515S-1WR3		15	67/7	69/73	560
	IF0524S-1WR3		24	41/4	69/73	100
UL/EN/BS EN/IEC	IF1205S-1WR3	12 (11.4-12.6)	5	200/20	69/73	2400
EN/BS EN	IF1209S-1WR3		9	111/12	69/73	1000
UL/EN/BS EN/IEC	IF1212S-1WR3		12	83/9	69/73	560
	IF1215S-1WR3		15	67/7	71/75	560
EN/BS EN	IF1505S-1WR3	15 (14.25-15.75)	5	200/20	69/73	2400
	IF1515S-1WR3		15	67/7	71/75	560
	IF2403S-1WR3	24 (22.8-25.2)	3.3	250/25	65/71	2400
	IF2405S-1WR3		5	200/20	67/73	2400
	IF2409S-1WR3		9	111/12	67/73	1000
	IF2412S-1WR3		12	83/9	67/73	560
	IF2415S-1WR3		15	67/7	67/73	560

Input Specifications

Item	Operating Conditions			Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	5V input	3.3VDC/5VDC output		--	286/8	303/--	mA
		9VDC/12VDC output		--	282/12	299/--	
		15VDC/24VDC output		--	274/18	290/--	

Input Current (full load / no-load)	12V input	5VDC/9VDC/12VDC output	--	115/8	121/--	mA	
		15VDC output	--	112/8	118/--		
	15V input	5VDC output	--	92/8	97/--		
		15VDC output	--	89/8	94/--		
	24V input	3.3VDC output	--	59/8	65/--		
		5VDC/9VDC/12VDC/15VDC output	--	58/8	63/--		
Reflected Ripple Current*			--	15	--		
Input Filter				Capacitance Filter			
Hot Plug				Unavailable			

Note: * Refer to DC-DC Converter Application Notes for detailed description of reflected ripple current test method.

Output Specifications

Item	Operating Conditions			Min.	Typ.	Max.	Unit
Voltage Accuracy				--	--	±3	
Linear Regulation	Input voltage change: ±1%			--	--	±0.25	%
Load Regulation	10%-100% load	3.3VDC output		--	--	±3	
		Other output		--	--	±2	
Ripple & Noise*	20MHz bandwidth	5V input	Other output	--	30	75	mVp-p
			24VDC output	--	50	100	
		Other input	Other output	--	30	100	
			15VDC output	--	80	150	
Temperature Coefficient	100% load			--	±0.02	--	%/°C
Short-circuit Protection				Continuous, self-recovery			

Note: * The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions			Min.	Typ.	Max.	Unit
Isolation	Input-output electric strength test for 1 minute with a leakage current of 1mA max.			3000	--	--	VDC
Insulation Resistance	Input-output resistance at 500VDC			1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V			--	20	--	pF
Operating Temperature	Derating when operating temperature $\geq 71^{\circ}\text{C}$ (see Fig.1)			-40	--	85	
Storage Temperature				-55	--	125	
Case Temperature Rise	Ta=25°C	5V input	3.3VDC output	--	30	--	°C
			Other output	--	25	--	
		Other input		--	25	--	
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds			--	--	300	
Storage Humidity	Non-condensing	5V input		--	--	95	%RH
		Other input		5	--	95	
Vibration	12/15/24VDC input			10-150Hz, 5G, 0.75mm. along X, Y and Z			
Switching Frequency	100% load, nominal input voltage		5V input	--	270	--	kHz
			Other input	--	260	--	
MTBF	MIL-HDBK-217F@25°C			3500	--	--	k hours

Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94V-0)
Dimensions	19.65 x 6.00 x 10.16mm
Weight	2.1g(Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032 CLASS B
	RE	CISPR32/EN55032 CLASS B
Immunity	ESD	IEC/EN61000-4-2 Air ±8kV, Contact ±6kV perf. Criteria B

Note: Refer to Fig. 3 for recommended circuit test.

Typical Characteristic Curves

Temperature Derating Curve





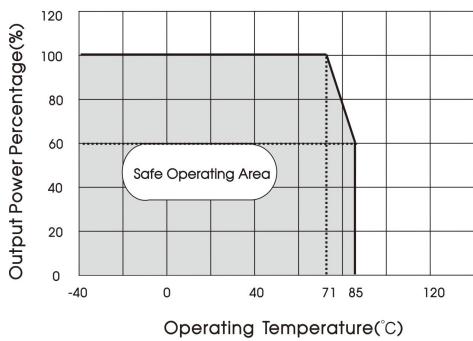


Fig. 1

Efficiency Vs Input Voltage (Full Load)**Efficiency Vs Output Load (Vin=5V)**

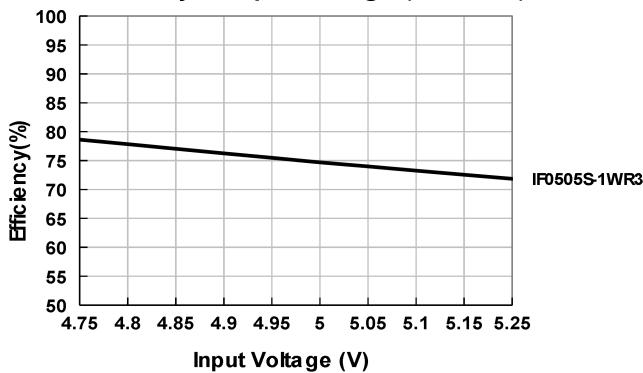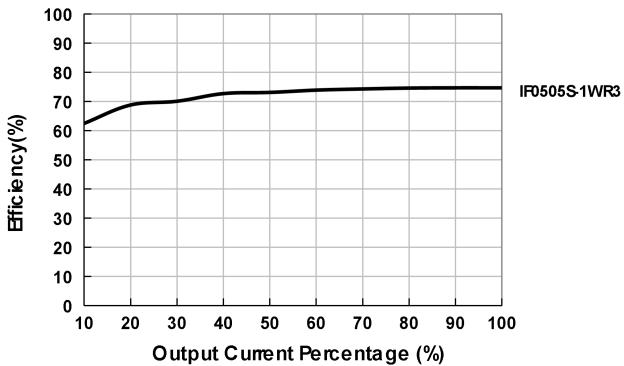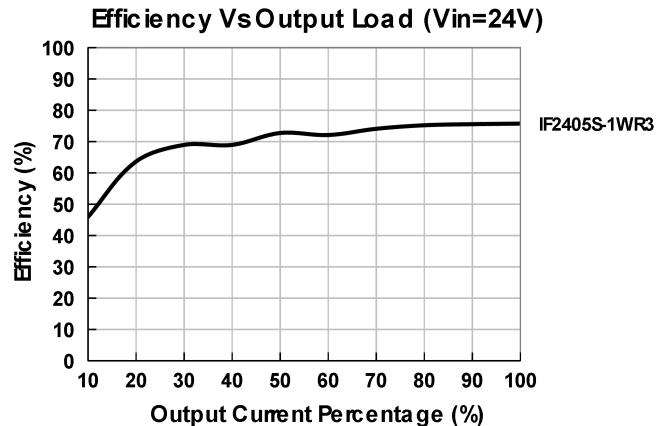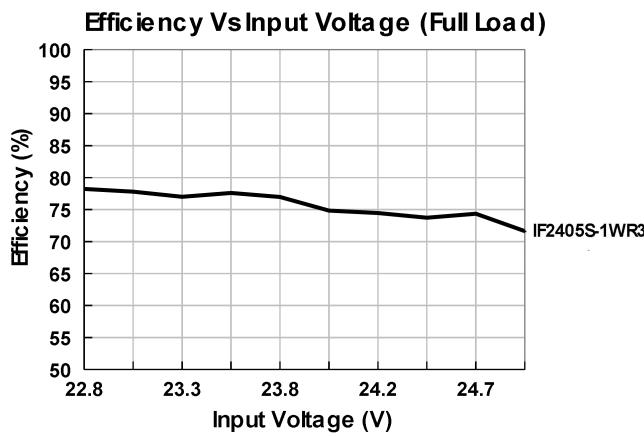

Design Reference

1. Typical application circuit

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig. 2.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.

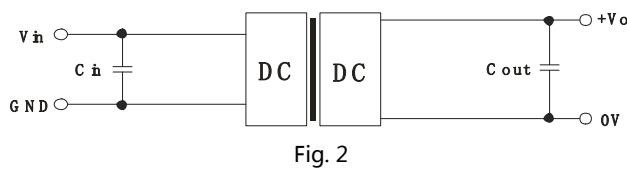


Table 1: Recommended input and output capacitor values

Vin	Cin	Vo	Cout
5VDC	4.7μF/16V	3.3VDC	10μF/16V
12VDC	2.2μF/25V	5VDC	10μF/16V
15VDC	2.2μF/25V	9VDC	2.2μF/16V
24VDC	1μF/50V	12VDC	2.2μF/25V
--	--	15VDC	1μF/25V

2. EMC compliance circuit

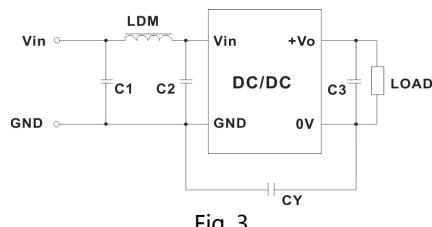
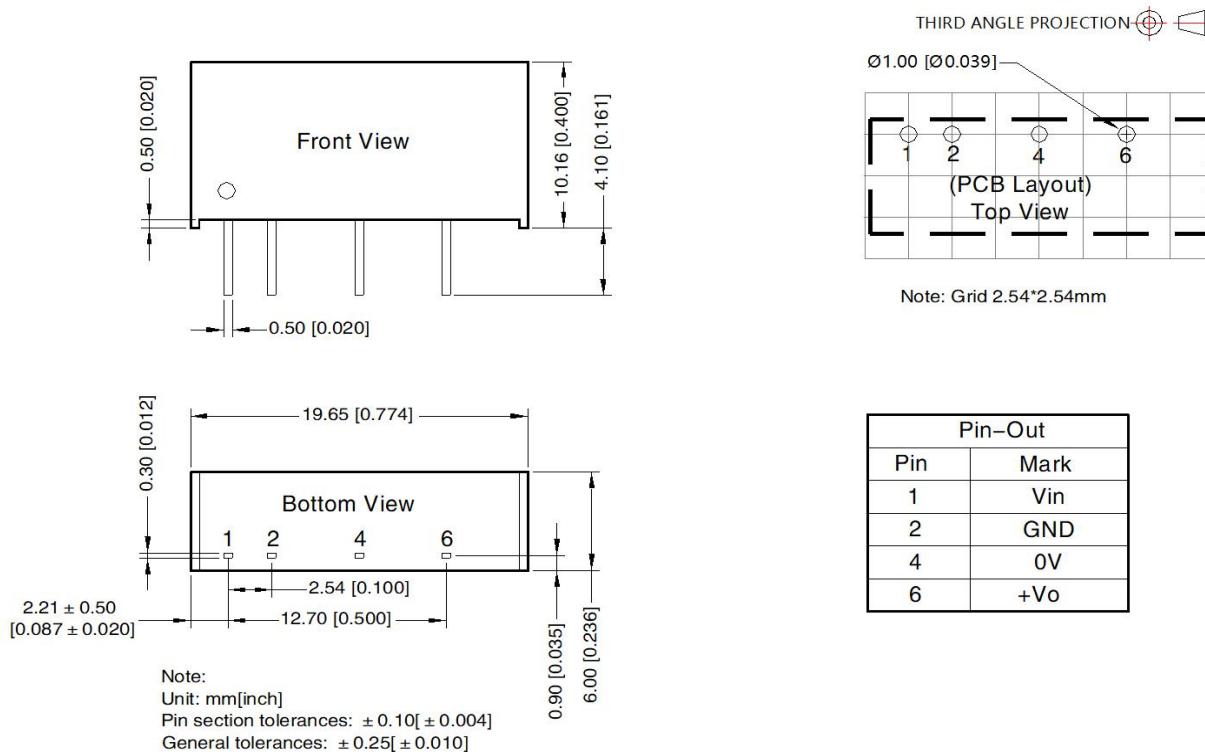


Table 2: Recommended EMC filter values

Input voltage		5V input		Other input
Output voltage		3.3/5/9VDC	12/15/24VDC	--
EMI	C1/C2	4.7μF /25V	4.7μF /25V	4.7μF /50V
	CY	100pF /4kV	1000pF /4kV	270pF /4kV
	C3	Refer to the Cout in table 1		
	LDM	6.8μH		

3. For additional information please refer to DC-DC converter application notes on

www.mornsun-power.com.

Dimensions and Recommended Layout**Notes:**

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58200001;
2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
3. The maximum capacitive load offered were tested at input voltage range and full load;
4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
5. All index testing methods in this datasheet are based on our company corporate standards;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cnwww.mornsun-power.com