


15W, AC-DC converter

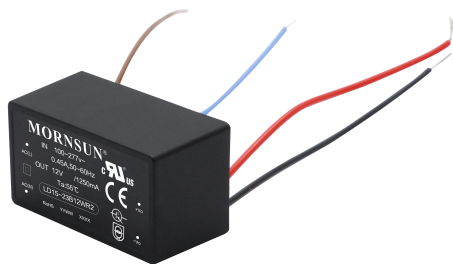

FEATURES

- Ultra-wide 85 - 305VAC and 100 - 430VDC input voltage range
- Operating ambient temperature range: -40℃ to +85℃
- Up to 86% efficiency
- No-load power consumption < 0.1W
- 5000m altitude application
- Wire package
- OVC III (meet EN61558)
- EMI performance meets CISPR32/EN55032 CLASS B, EN55014-1

LD15-23BxxWR2 series AC-DC converters is one of Mornsun's new generation compact size power converter. It features ultra-wide AC input and at the same time accepts DC input voltage, low power consumption, low ripple & noise, high efficiency, high reliability, reinforced isolation. It offers good EMC performance compliant to IEC/EN61000-4 and CISPR32/EN55032 and meets IEC/EN/UL62368/EN60335/EN61558/IEC/EN60601-1/ANSI/AAMI ES60601-1 standards. The converters are widely used in industrial, power, medical treatment, home appliances, instrumentation, communication and civil applications. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

Selection Guide

Certification	Part No.	Output Power	Nominal Output Voltage and Current	Efficiency at 230VAC (%) Typ.	Capacitive Load (uF) Max.
UL/EN/IEC	LD15-23B03WR2	13.2W	3.3V/4000mA	82	6600
	LD15-23B05WR2	15W	5V/3000mA	85	5000
	LD15-23B09WR2		9V/1670mA	84	3000
	LD15-23B12WR2		12V/1250mA	85	2000
	LD15-23B15WR2		15V/1000mA	85	1500
	LD15-23B24WR2		24V/625mA	86	680

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	--	305	VAC
	DC input	100	--	430	VDC
Input Frequency		47	--	63	Hz
Input Current	115VAC	--	--	0.45	A
	230VAC	--	--	0.30	
Inrush Current	115VAC	--	30	--	
	230VAC	--	60	--	
Leakage Current	277VAC/50Hz	0.1mA RMS Max.			
Built In Fuse		2A/300V, slow-blow			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		--	±2	--	%
Line Regulation	Full load	--	±0.5	--	
Load Regulation	0%-100% load	--	±1	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)		70	120	mV
Stand-by Power Consumption	230VAC	3.3/5/9/12/15V	--	0.10	W
		24V	--	0.12	
Temperature Coefficient		--	±0.02	--	%/°C
Short Circuit Protection		Hiccup, continuous, self-recovery			

Over-current Protection		$\geq 110\%$ Io, self-recovery			
Over-voltage Protection	3.3/5V	$\leq 7.5\text{VDC}$ (Output voltage clamp or hiccup)			
	9 V	$\leq 15\text{VDC}$ (Output voltage clamp or hiccup)			
	12/15V	$\leq 20\text{VDC}$ (Output voltage clamp or hiccup)			
	24V	$\leq 30\text{VDC}$ (Output voltage clamp or hiccup)			
Minimum Load		0	--	--	%
Hold-up Time	115VAC	--	10	--	ms
	230VAC	--	55	--	

Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 10uF electrolytic capacitor and 1uF ceramic capacitor, please refer to AC-DC Converter Application Notes for specific information.

General Specifications

Item		Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output	Electric Strength Test for 1min., leakage current $< 5\text{mA}$	4200	--	--	VAC
Insulation Resistance	Input - output	At 500VDC	100	--	--	M Ω
Operating Temperature			-40	--	+85	$^{\circ}\text{C}$
Storage Temperature			-40	--	+85	
Storage Humidity			--	--	95	%RH
Soldering Temperature	Wave-soldering		$260 \pm 5^{\circ}\text{C}$; time: 5 - 10s			
	Manual-welding		$360 \pm 10^{\circ}\text{C}$; time: 3 - 5s			
Switching Frequency			--	65	--	kHz
Power Derating	+50 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$		3.00	--	--	%/ $^{\circ}\text{C}$
	+55 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$		2.67	--	--	
	+70 $^{\circ}\text{C}$ to +85 $^{\circ}\text{C}$		0.66	--	--	
	85VAC - 100VAC		1.33	--	--	%/ VAC
	277VAC - 305VAC		0.71	--	--	
	2000 - 5000m		6.7	--	--	%/Km
Safety Standard		IEC/UL62368-1, EN61558-1, EN60335-1 Safety Approval & EN62368-1 (Report); Design refer to IEC/EN60601-1/ANSI/AAMI ES60601-1				
Safety Class		CLASS II				
MTBF		MIL-HDBK-217F@25 $^{\circ}\text{C}$ > 3,200,000 h				
Designed Life	230VAC	Ta: 25 $^{\circ}\text{C}$ 100% load	> 130x10 ³ h			
		Ta: 55 $^{\circ}\text{C}$ 100% load	> 27x10 ³ h			

Mechanical Specifications

Case Material	Black plastic, flame-retardant and heat-resistant (UL94V-0)
Dimension	47.60 x 26.80 x 23.50 mm
Weight	48g (Typ.)
Cooling method	Free air convection




Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032 CLASS B
		CISPR32/EN55032 CLASS B (See Fig.2 for recommended circuit)
		CISPR11/EN55011 CLASS B
		EN55014-1
	RE	CISPR32/EN55032 CLASS B
		CISPR32/EN55032 CLASS B (See Fig.2 for recommended circuit)
		CISPR11/EN55011 CLASS B
		EN55014-1

Immunity	ESD	IEC/EN 61000-4-2 Contact $\pm 8\text{KV}$	perf. Criteria B
		IEC/EN55014-2	perf. Criteria B
	RS	IEC/EN61000-4-3 10V/m	perf. Criteria A
		IEC/EN55014-2	perf. Criteria A
	EFT	IEC/EN61000-4-4 $\pm 2\text{KV}$	perf. Criteria B
		IEC/EN61000-4-4 $\pm 4\text{KV}$ (See Fig.1 for typical application circuit)	perf. Criteria B
		IEC/EN61000-4-4 $\pm 4\text{KV}$ (See Fig.2 for recommended circuit)	perf. Criteria A
		IEC/EN55014-2	perf. Criteria B
	Surge	IEC/EN61000-4-5 line to line $\pm 1\text{KV}$	perf. Criteria B
		IEC/EN61000-4-5 line to line $\pm 2\text{KV}$ (See Fig.1 for typical application circuit)	perf. Criteria B
		IEC/EN61000-4-5 line to line $\pm 2\text{KV}$ /line to ground $\pm 4\text{KV}$ (See Fig.2 for recommended circuit)	perf. Criteria A
		IEC/EN55014-2	perf. Criteria B
CS		IEC/EN61000-4-6 10Vr.m.s	perf. Criteria A
		IEC/EN55014-2	perf. Criteria A
Voltage dip, short interruption and voltage variation		IEC/EN61000-4-11 0%, 70%	perf. Criteria B
		IEC/EN55014-2	perf. Criteria B



Note: When the output terminal of the product needs to be connected to PE through a Y capacitor, or close to the metal frame, please refer to the Fig.2 for recommended circuit.

Product Characteristic Curve

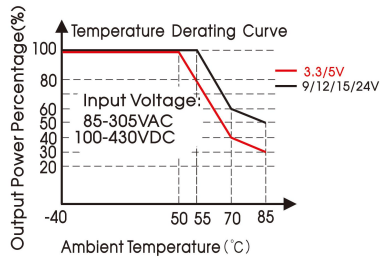

Note: ① With an AC input between 85-100V/277-305VAC and a DC input between 100-120V/390-430VDC, the output power must be derated as per temperature derating curves;

② This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

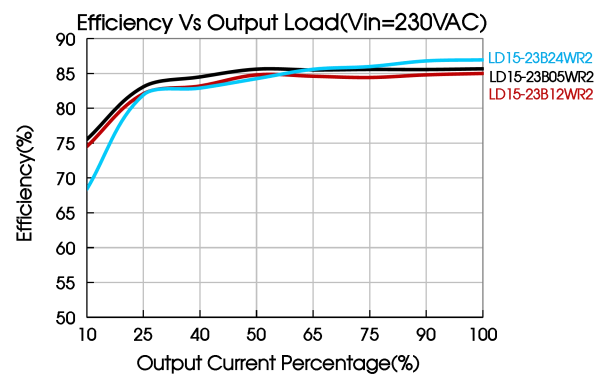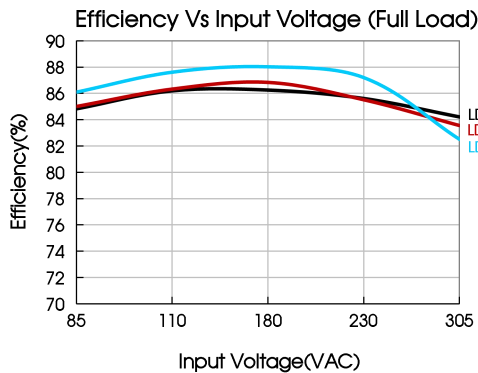

Design Reference

1. Typical application

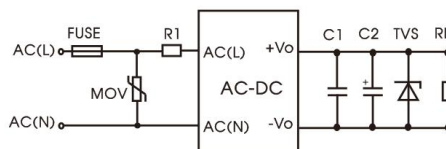


Fig. 1: Typical circuit diagram

Part No.	FUSE	MOV	R1	C1	C2	TVS
LD15-23B03WR2	3.15A/300V, slow-blow, required	S14K350	6.8 Ω /3W (wire-wound resistor, required)	1uF/50V	220uF/16V	SMBJ7.0A
LD15-23B05WR2					220uF/16V	SMBJ7.0A
LD15-23B09WR2					100uF/25V	SMBJ12A
LD15-23B12WR2					100uF/25V	SMBJ20A
LD15-23B15WR2					100uF/25V	SMBJ20A
LD15-23B24WR2					100uF/35V	SMBJ30A

Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a Capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure.

2. EMC compliance recommended circuit

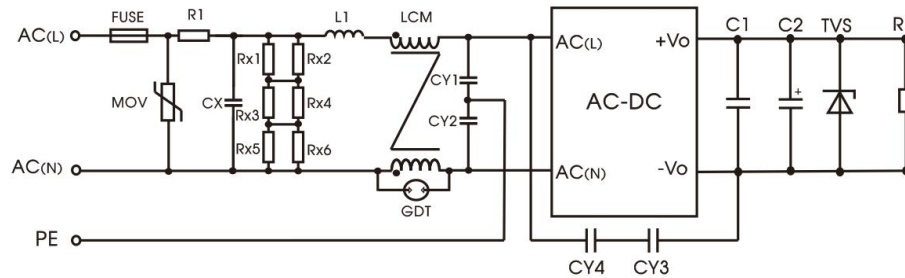


Fig. 2: EMC application circuit with higher requirements


Component	Recommended value
FUSE	3.15A/300V, slow-blow, required
MOV	S14K350
CX	334K/305VAC
R1	12 Ω /5W (wire-wound resistor, required)
L1	1.2mH/0.5A
CY1/CY2	2.2nF/400VAC
CY3/CY4	1nF/400VAC
GDT	300V/1KA
LCM	20 mH, P/N: FL2D-10-203 (MORNSUN) is recommended

Note: Rx1/Rx2/Rx3/Rx4/Rx5/Rx6 is the bleeder resistance of CX, and the recommended resistance value is 1.5M Ω /150VDC.

3. For additional information please refer to application notes on www.mornsun-power.com.

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

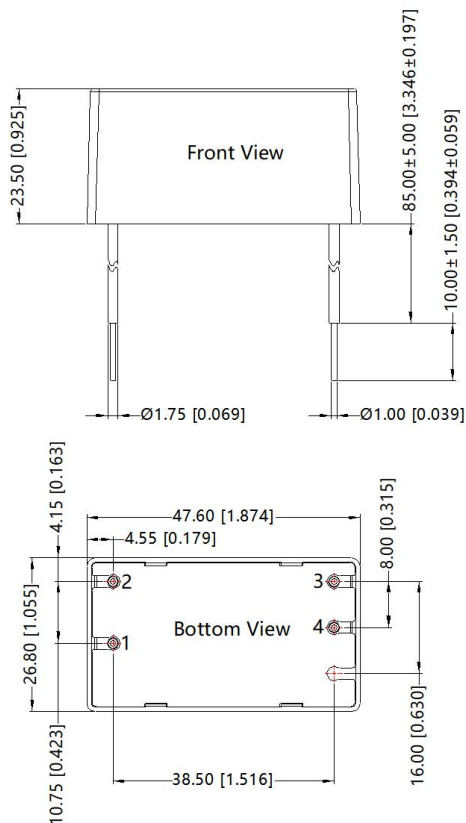

Pin-Out		
Pin	Wire Type	Mark
1 brown	UL-1330 AWG22	AC(L)
2 blue	UL-1330 AWG22	AC(N)
3 black	UL-1330 AWG22	-Vo
4 red	UL-1330 AWG22	+Vo

Note:
Unit: mm[inch]
Wire diameter tolerances: $\pm 0.30[\pm 0.012]$
General tolerances: $\pm 0.50[\pm 0.020]$
About wire spacing tolerances: $\pm 2.00[0.079]$

Note:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220212;
2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75% with nominal input voltage and rated output load;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com