

40W, AC/DC converter



CE Report
EN62368-1

UK
BS EN 62368-1

RoHS



FEATURES

- Wide input voltage range: 85 - 264VAC/100 - 370VDC
- Low standby power consumption: 0.5W, conversion efficiency up to 84%
- Output short circuit, over-current, over-voltage protection
- Design to meet UL60950
- Mounting: PCB mounting, Chassis mounting, DIN-Rail mounting available

LH40-10A/B/Dxx series is a 40W efficient environmental-protection AC-DC module power supply. It features universal AC input and at the same time accepts DC input voltage, high efficiency, high reliability, low power consumption and high safety isolation. The series products are widely used in industries such as industrial control, electricity, office. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

Selection Guide

Certification	Part No.*	Output Power	Nominal Output Voltage and Current		Efficiency (230VAC, %/Typ.)	Max. Capacitive Load(uF)
			(Vo1/Io1)	(Vo2/Io2)		
EN	LH40-10B03	40W	3.3VDC/8000mA	--	78	60000
	LH40-10B05		5VDC/8000mA	--	82	40000
	LH40-10B09		9VDC/4444mA	--	84	12000
	LH40-10B12		12VDC/3333mA	--	84	9000
	LH40-10B15		15VDC/2666mA	--	84	7000
	LH40-10B24		24VDC/1667mA	--	84	2000
	LH40-10D0512-13		5VDC/5000mA	12VDC/1250mA	82	10000/470
	LH40-10D0524-06		5VDC/5000mA	24VDC/625mA	82	10000/400
	LH40-10A05		+5VDC/4000mA	-5VDC/4000mA	82	12000/12000
	LH40-10A12		+12VDC/1666mA	-12VDC/1666mA	84	4400/4400
	LH40-10A15		+15VDC/1333mA	-15VDC/1333mA	84	1000/1000

Note:

1. *Product model with a suffix of "A5" means chassis mounting and that with a suffix of "A6" indicates DIN-Rail mounting (e.g. LH40-10B05A5 means chassis mounting; LH40-10B05A6 means DIN-Rail mounting).
2. The product picture is for reference only. For details, please refer to the actual product.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	--	264	VAC
	DC input	100	--	370	VDC
Input frequency		47	--	440	Hz
Input current	115VAC	--	--	1.0	A
	230VAC	--	--	0.6	
Inrush current	115VAC	--	30	--	
	230VAC	--	50	--	
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	LH40-10Bxx Primary output	--	±2	--	%
	LH40-10Axx Primary output / Secondary output	--	±2	--	
	LH40-10Dxx Primary output	--	±2	--	
	LH40-10Dxx Secondary output	--	±5	--	

Line Regulation	LH40-10Bxx		--	±0.5	--	%
	LH40-10Axx		--	±0.5	--	
	LH40-10Dxx (Primary output)		--	±0.5	--	
	LH40-10Dxx (Secondary output)		--	±1.5	--	
Load Regulation	LH40-10Bxx		--	±1	--	%
	LH40-10Axx (Balance load)		--	±2	--	
	LH40-10Dxx (Balance load)	Primary output	--	±2	--	
		Secondary output	--	±5	--	
Ripple & Noise*	20MHz bandwidth (peak-peak value)		--	50	100	mV
Temperature Coefficient	Primary output		--	±0.02	--	%/°C
Stand-by Power Consumption			--	--	0.5	W
Short Circuit Protection			Continuous, self-recovery			
Over-current Protection			≥110%Io self-recovery			
Over-voltage Protection	3.3V Output		--	--	5.5	V
	5V Output		--	--	9	
	9V Output		--	--	14	
	12V Output		--	--	16	
	15V Output		--	--	24	
	24V Output		--	--	35	
Min. Load	LH40-10Bxx		0	--	--	%
	LH40-10Axx (Balance load)		10	--	--	
	LH40-10Dxx (Balance load)		25	--	--	
Cross Regulation	LH40-10A05		--	±8	--	
	LH40-10A12/ LH40-10A15		--	±5	--	
	LH40-10Dxx	Primary output	--	±1	--	
		Secondary output	--	±7	--	
Trim	LH40-10Bxx		--	--	±10	ms
Hold-up Time	115VAC input		--	15	--	
	230VAC input		--	80	--	

Note: * Ripple and noise are measured by "parallel cable" method, please see AC-DC Converter Application Notes for specific operation.

General Specifications

Item		Operating Conditions		Min.	Typ.	Max.	Unit
Isolation Voltage	Input-output	Test time: 1min	LH40-10Axx/ LH40-10Bxx/ LH40-10Dxx	3000	--	--	VAC
	Output-output		LH40-10Dxx	500	--	--	
Operating Temperature				-40	--	+70	℃
Storage Temperature				-40	--	+85	
Storage Humidity				--	--	95	%RH
Soldering Temperature		Wave-soldering, Max. 10 seconds		255	260	265	℃
		Manual-welding, Max. 10 seconds		350	360	370	
Switching Frequency				--	65	--	kHz
Power Derating		-40℃ to -30℃ (LH40-10B03/05)		4.0	--	--	% /℃
		-40℃ to -30℃ (LH40-10B09/12/15)		3.0	--	--	
		-40℃ to -30℃ (LH40-10Dxx/LH40-10Axx)		5.0	--	--	
		+45℃ to +70℃ (LH40-10B03/05)		3.0	--	--	
		+55℃ to +70℃ (LH40-10B09/12/15)		3.7	--	--	
		+55℃ to +70℃ (LH40-10B24)		2.7	--	--	
		+50℃ to +70℃ (LH40-10Dxx/LH40-10Axx)		3.0	--	--	
Safety Standard				EN/BS EN62368-1 safety approved; Design refer to UL/IEC60950-1			
Safety Class				CLASS II			
MTBF		MIL-HDBK-217F@25℃		>300,000 h			




Physical Specifications

Casing Material		Black flame-retardant and heat-resistant plastic (UL94V-0)
Dimensions	Horizontal package	89.00*63.50*25.00 mm
	A5 chassis package	135.00*70.00*33.50 mm
	A6 DIN-rail package	137.00*70.00*39.00 mm
Weight	Horizontal package/A5 chassis package/A6 DIN-rail package	225g/310g/370g(Typ.)
Cooling Method		Free air convection

EMC Specifications



EMI	CE	CISPR22/EN55022	CLASS B	
	RE	CISPR22/EN55022	CLASS B	
EMS	ESD	IEC/EN61000-4-2	Contact $\pm 6\text{KV}$ /Air $\pm 8\text{KV}$	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 2\text{KV}$	perf. Criteria B
		IEC/EN61000-4-4	$\pm 4\text{KV}$ (See Fig. 4 for recommended circuit)	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line $\pm 1\text{KV}$ /line to ground $\pm 2\text{KV}$	perf. Criteria B
		IEC/EN61000-4-5	line to line $\pm 2\text{KV}$ / line to ground $\pm 4\text{KV}$ (See Fig. 4 for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A
	PFM	IEC/EN61000-4-8	10A/m	perf. Criteria A
	Voltage dips, short interruptions and voltage variations immunity		IEC/EN61000-4-11	0%, 70%

Product Characteristic Curve

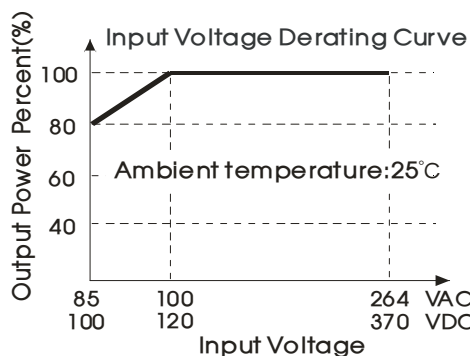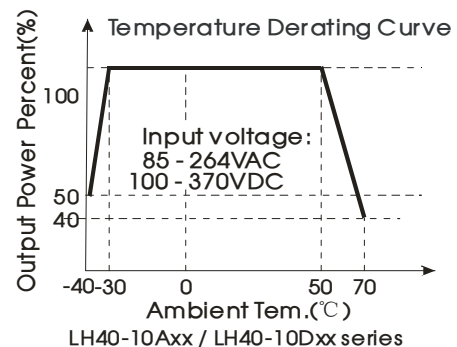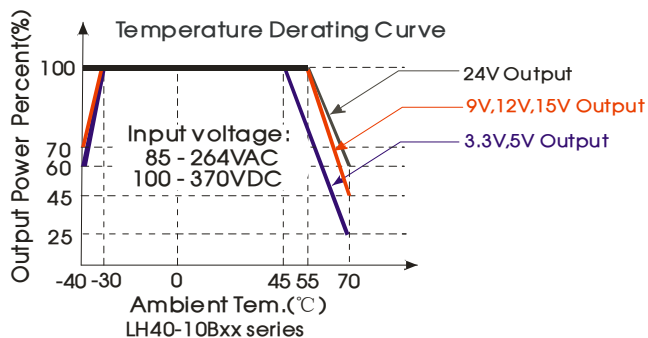

Note:

- ① With an AC input between 85-100VAC and a DC input between 100-120VDC, the output power must be derated as per temperature derating curves;
- ② This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

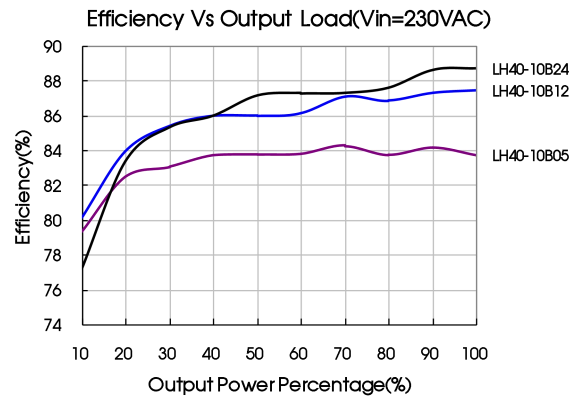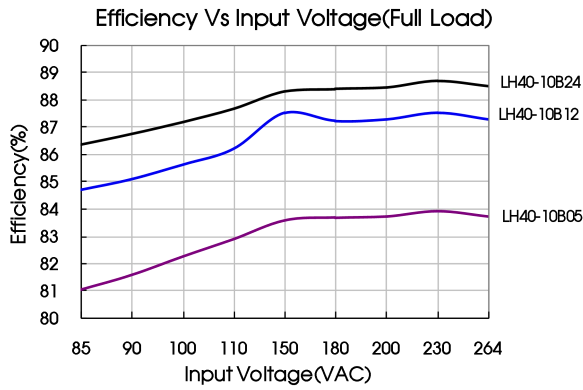

Design Reference

1. Typical application circuit

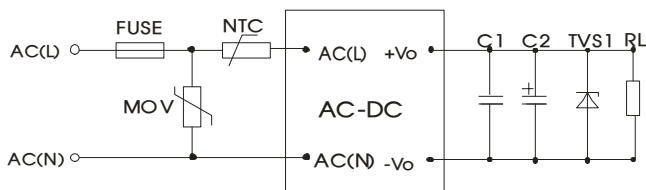


Fig. 1: LH40-10Bxx typical application circuit

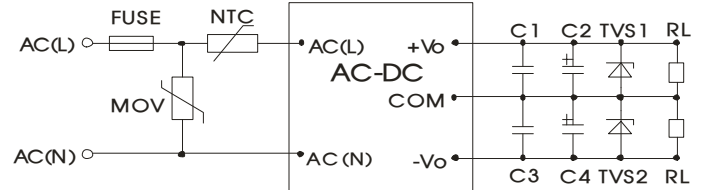


Fig. 2: LH40-10Axx typical application circuit

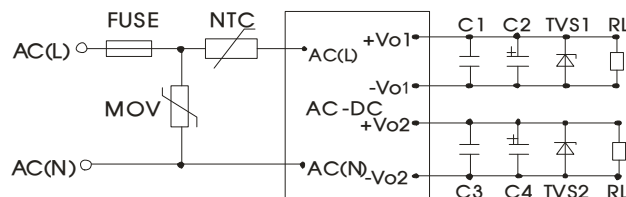


Fig. 3: LH40-10Dxx typical application circuit

Model	C2(uF)	C4(uF)	C1, C3(uF)	TVS1	TVS2
LH40-10B03	680	--	1	SMBJ7.0A	--
LH40-10B05	680	--	1	SMBJ7.0A	--
LH40-10B09	330	--	1	SMBJ12A	--
LH40-10B12	220	--	1	SMBJ20A	--
LH40-10B15	220	--	1	SMBJ20A	--
LH40-10B24	120	--	1	SMBJ30A	--
LH40-10D0512-13	680	220	1	SMBJ7.0A	SMBJ20A
LH40-10D0524-06	680	120	1	SMBJ7.0A	SMBJ30A
LH40-10A05	680	680	1	SMBJ7.0A	SMBJ7.0A
LH40-10A12	220	220	1	SMBJ20A	SMBJ20A
LH40-10A15	220	220	1	SMBJ20A	SMBJ20A

Note: Output filtering capacitor C2, C4 are electrolytic capacitors, it is recommended to apply electrolytic capacitor with high frequency and low resistance. For capacitance and current of capacitor please refer to manufacture's datasheet. Capacitance withstand voltage derating should be 80% or above. C1, C3 are ceramic capacitors, which is used to filter high-frequency noise. TVS is a recommended component to protect post-circuits if converter fails. External input FUSE model is recommended to use 3.15A/250VAC, slow fusing. External input NTC model is recommended to use 5D-9. External input MOV model is recommended to use S10K300.

2. EMC solution-recommended circuit


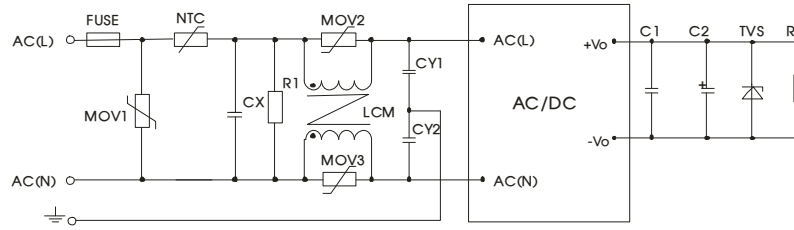


Fig. 4 (Output external circuit refer to the typical application circuit)

Element model	Recommended value
MOV1	S14K350
MOV2, MOV3	S07K350
CX	0.15uF/300VAC
CY1	2.2nF/400VAC
CY2	2.2nF /400VAC
R1	1MΩ/2W
LCM	2.2 mH, P/N: FL2D-10-222(MORNSUN) is recommended
NTC	5D-14
FUSE	3.15A/250V, slow-blow, required

3. Application of Trim and calculation of Trim resistance

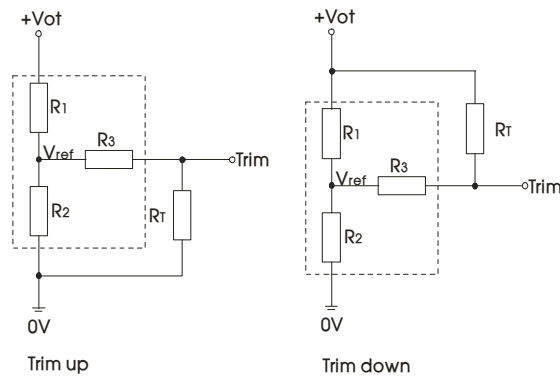

Applied circuits of Trim (Part in broken line is the interior of models)

Calculation formula of Trim resistance:

$$\text{up: } R_T = \frac{aR_2}{R_2 - a} - R_3 \quad a = \frac{V_{ref}}{V_{ot} - V_{ref}} \cdot R_1$$



$$\text{down: } R_T = \frac{aR_1}{R_1 - a} - R_3 \quad a = \frac{V_{ot} - V_{ref}}{V_{ref}} \cdot R_2$$

R_T is Trim resistance, a is a self-defined parameter, with no real meaning.

Vout	R1(KΩ)	R2(KΩ)	R3(KΩ)	Vref(V)	Vot(V)
3.3V	2	1.2	1	1.24	Output voltage after regulation, variation $\leq \pm 10\%$
5V	3.3	3.3	1	2.5	
9V	4.7	1.8	1	2.5	
12V	3.83	1	1	2.5	
15V	4.99	1	1	2.5	
24V	8.66	1	1	2.5	


4. For more information, Please find the application note on www.mornsun-power.com

Dimensions and Recommended Layout

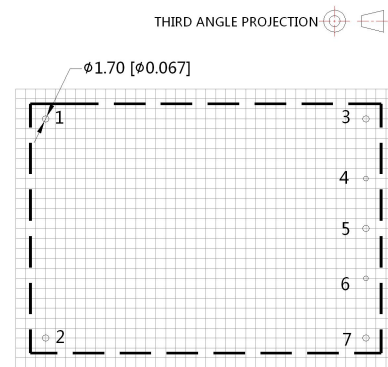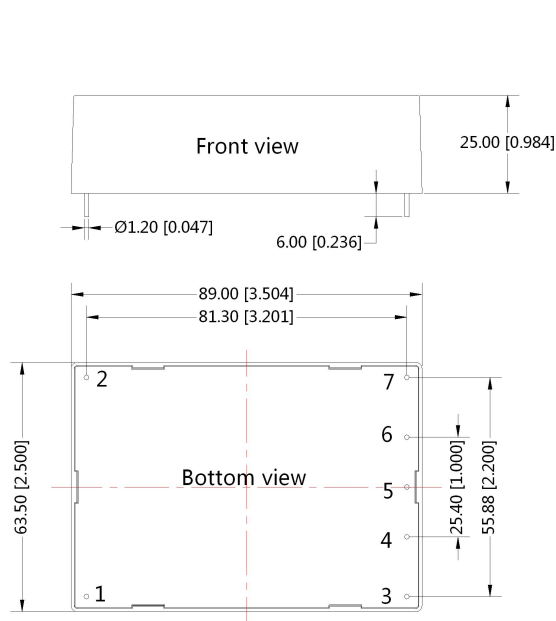

Pin-Out			
Pin	LH40-10A	LH40-10B	LH40-10D
1	AC(L)	AC(L)	AC(L)
2	AC(N)	AC(N)	AC(N)
3	+Vo	+Vo	+Vo2
4	No Pin	No Pin	+Vo1
5	COM	-Vo	-Vo2
6	No Pin	No Pin	-Vo1
7	-Vo	Trim	No Pin

A5 Chassis Package Dimensions

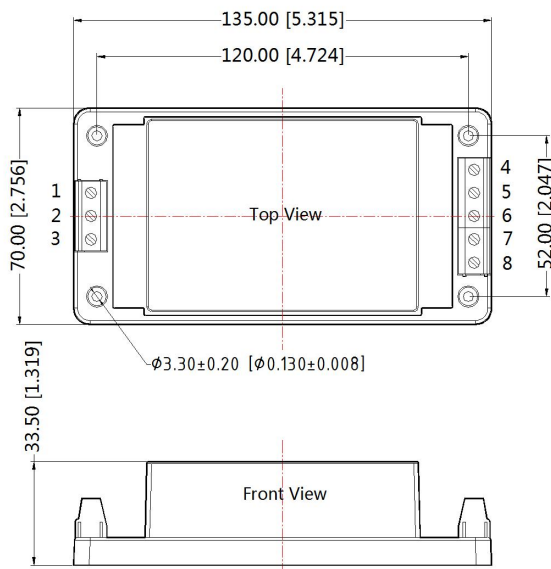


Pin-Out			
Pin	LH40-10A	LH40-10B	LH40-10D
1	AC(L)	AC(L)	AC(L)
2	AC(N)	AC(N)	AC(N)
3	NC	NC	NC
4	+Vo	+Vo	+Vo2
5	NC	NC	+Vo1
6	COM	-Vo	-Vo2
7	NC	NC	-Vo1
8	-Vo	Trim	NC

Note:
Unit: mm[inch]
Wire range: 24-12 AWG
Tightening torque: Max 0.4 N·m
General tolerances: ± 1.00 [± 0.040]

A6 DIN-rail Package Dimensions

THIRD ANGLE PROJECTION 

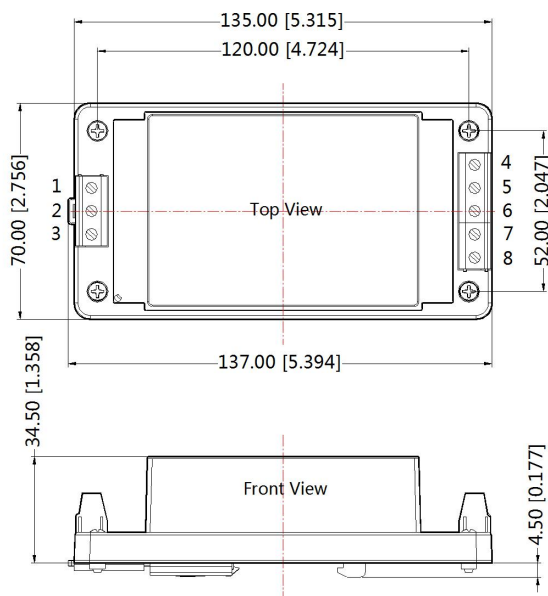

Pin-Out			
Pin	LH40-10A	LH40-10B	LH40-10D
1	AC(L)	AC(L)	AC(L)
2	AC(N)	AC(N)	AC(N)
3	NC	NC	NC
4	+Vo	+Vo	+Vo2
5	NC	NC	+Vo1
6	COM	-Vo	-Vo2
7	NC	NC	-Vo1
8	-Vo	Trim	NC

Note:
Unit:mm[inch]
Wire range:24-12 AWG
Tightening torque: Max 0.4 N·m
Mounting rail: TS35, rail needs to connect safety ground
General tolerances:±1.00[±0.040]

Notes:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220021(Horizontal package), the Packing bag number of A5/A6 package: 58220031;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75% with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on our company corporate standards;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Specifications are subject to change without prior notice.
6. Products are related to laws and regulations: see "Features" and "EMC";
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com