

40W, AC/DC converter



FEATURES

- Universal 85-264VAC or 100-370VDC input voltage
- Operating ambient temperature range: -40℃ to +70℃
- High I/O isolation test voltage up to 4000VAC
- Regulated output, low ripple & noise
- Output short circuit, over-current, over-voltage protection
- High efficiency, high reliability
- Plastic case meets UL94V-0 flammability
- Meet EMI CISPR32/EN55032 CLASS B

LHE40-20Bxx series are 40W efficient environmental-protection AC-DC module power supply. It features universal AC input and at the same time accepts DC input voltage, low power consumption, high efficiency, high reliability, reinforced isolation. It offers good EMC performance compliant to IEC/EN61000-4 and CISPR32/EN55032 and meets UL62368 and EN62368 standards. The converters are widely used in control, electricity, office applications. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

Selection Guide

Certification	Part No.*	Output Power	Nominal Output Voltage and Current (Vo/Io)	Efficiency at 230VAC (%)Typ.	Capacitive Load (μF)Max.
EN	LHE40-20B03	40W	3.3VDC/8000mA	78	60000
	LHE40-20B05		5VDC/8000mA	82	40000
	LHE40-20B12		12VDC/3330mA	84	9000
	LHE40-20B15		15VDC/2660mA	84	7000
	LHE40-20B24		24VDC/1670mA	84	2000
	LHE40-20B48		48VDC/830mA	84	1000

Note: 1. * Use suffix "A5" for chassis and suffix "A6" for DIN-Rail mounting.

2. The product picture is for reference only. For details, please refer to the actual product.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC Input	85	--	264	VAC
	DC Input	100	--	370	VDC
Input Frequency		47	--	63	Hz
Input Current	115VAC	--	--	1.0	A
	230VAC	--	--	0.6	
Inrush Current	115VAC	--	50	--	
	230VAC	--	70	--	
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	All load range	--	±2	--	%
Line Regulation	Rated load	--	±0.5	--	%
Load Regulation	0% - 100% load(3.3V/5V Output)	--	±1	±3	
	0% - 100% load(12V/15V /24V/48V Output)	--	±1	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	--	80	150	mV
Temperature Coefficient		--	±0.02	--	%/℃
Stand-by Power Consumption		--	--	0.5	W
Short Circuit Protection		Hiccup, continuous, self-recovery			
Over-current Protection		≥110%Io, self-recovery			

Over-voltage Protection	3.3V Output	--	--	5.5	V
	5V Output	--	--	9	
	12V Output	--	--	16	
	15V Output	--	--	24	
	24V Output	--	--	35	
	48V Output	--	--	56	
Minimum Load		0	--	--	%
Hold-up Time	115VAC Input	--	10	--	ms
	230VAC Input	--	50	--	

Note: * The "parallel cable" method is used for ripple and noise test, please refer to AC-DC Converter Application Notes for specific information.

General Specifications

Item		Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output	Electric Strength Test for 1min, leakage current <10mA	4000	--	--	VAC
Operating Temperature			-40	--	+70	°C
Storage Temperature			-40	--	+85	
Storage Humidity			--	--	95	%RH
Soldering Temperature	Wave-soldering, Max. 10 seconds		255	260	265	°C
	Manual-welding, Max. 10 seconds		350	360	370	
Switching Frequency			--	65	--	kHz
Power Derating	-40°C to -30°C (LHE40-20B03/05)		4.0	--	--	% / °C
	-40°C to -30°C (LHE40-20B12/15)		3.0	--	--	
	-40°C to -30°C (LHE40-20B24/48)		2.0	--	--	
	+45°C to +70°C (LHE40-20B03/05)		3.0	--	--	
	+55°C to +70°C (LHE40-20B12/15)		3.7	--	--	
	+55°C to +70°C (LHE40-20B24/48)		2.7	--	--	
	85VAC - 100VAC		1.33	--	--	%/VAC
Safety Standard		EN62368-1/BS EN62368-1(Report) safety approved; Design refer to IEC/UL62368-1				
Safety Class		CLASS II				
MTBF		MIL-HDBK-217F@25°C > 300,000 h				



Mechanical Specifications

Case Material	Black plastic, flame-retardant and heat-resistant (UL94V-0)	
Dimension	Horizontal package	89.00 x 63.50 x 25.00 mm
	A5 chassis package	135.00 x 70.00 x 33.50 mm
	A6 DIN-rail package	137.00 x 70.00 x 39.00 mm
Weight	Horizontal package/A5 chassis package/A6 DIN-rail package	
Cooling Method	215g/300g/360g(Typ.)	
	Free air convection	



Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032 CLASS B			
	RE	CISPR32/EN55032 CLASS B			
Immunity	ESD	IEC/EN61000-4-2 Contact ±6KV/Air ±8KV			Perf. Criteria B
	RS	IEC/EN61000-4-3 10V/m			perf. Criteria A
	EFT	IEC/EN61000-4-4 ±2KV			perf. Criteria B
		IEC/EN61000-4-4 ±4KV (See Fig. 2 for recommended circuit)			perf. Criteria B
	Surge	IEC/EN61000-4-5 line to line ±1KV			perf. Criteria B
		IEC/EN61000-4-5 line to line ±2KV/ line to PE ±4KV (See Fig. 2 for recommended circuit)			perf. Criteria B
	CS	IEC/EN61000-4-6 10Vr.m.s			perf. Criteria A

Product Characteristic Curve

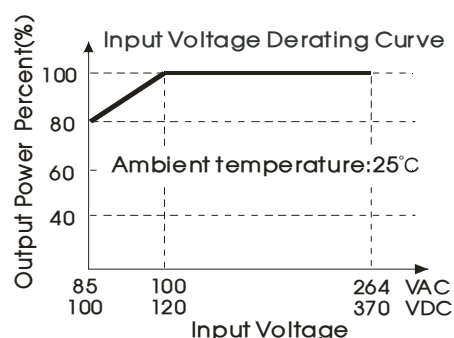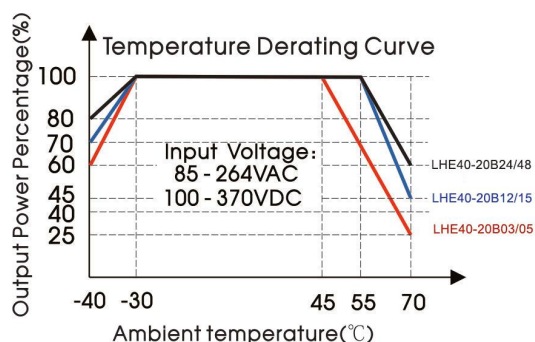

Note: ① With an AC input between 85-100VAC and a DC input between 100-120VDC, the output power must be derated as per temperature derating curves;
② This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

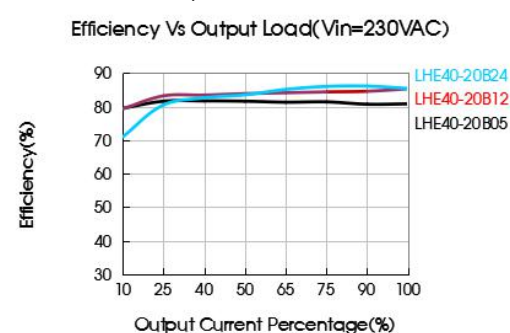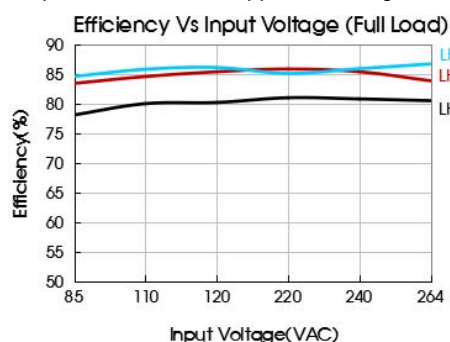

Design Reference

1. Typical application

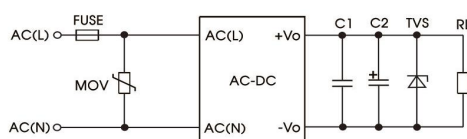


Fig. 1: LHE40-20Bxx typical application circuit

Part No.	C2(uF)	C1 (uF)	TVS
LHE40-20B03	680	1	SMBJ7.0A
LHE40-20B05	680	1	SMBJ7.0A
LHE40-20B12	220	1	SMBJ20A
LHE40-20B15	220	1	SMBJ20A
LHE40-20B24	120	1	SMBJ30A
LHE40-20B48	100	1	SMBJ64A

Note: We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a Capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure.

2. EMC compliance recommended circuit


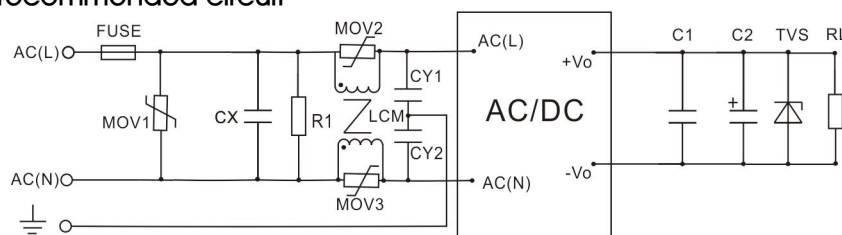


Fig.2 (Output external circuit refer to the typical application circuit)

Component	Recommended value
MOV1	S14K350
MOV2, MOV3	S07K350
CX	0.15μF/300VAC
CY1	2.2nF/400VAC
CY2	2.2nF /400VAC
R1	1MΩ /2W
LCM	2.2mH, P/N: FL2D-10-222 (MORNSUN) is recommend
FUSE	3.15A/250V slow-blow required

3. Application of Trim and calculation of Trim resistance

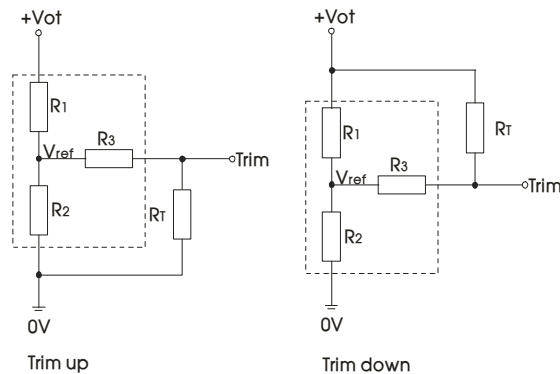

TRIM resistor connection (dashed line shows internal resistor network)

Calculating Trim resistor values:


$$\begin{aligned}
 \text{up: } R_T &= \frac{aR_2}{R_2-a} - R_3 & a &= \frac{V_{ref}}{V_{ot}-V_{ref}} \cdot R_1 \\
 \text{down: } R_T &= \frac{aR_1}{R_1-a} - R_3 & a &= \frac{V_{ot}-V_{ref}}{V_{ref}} \cdot R_2
 \end{aligned}$$

R_T = Trim Resistor value;
 a = self-defined parameter;
 V_{ot} = desired output voltage ($\pm 10\%$ max.).


Vout nominal	R1(KΩ)	R2(KΩ)	R3(KΩ)	Vref(V)	Vot(V)
3.3V	2	1.2	1	1.24	Resulting Trimmed Output voltage; range $\leq \pm 10\%$
5V	3.3	3.3	1	2.5	
12V	3.83	1	1	2.5	
15V	7.5	1.5	1	2.5	
24V	8.66	1	1	2.5	
48V	22	1.2	1	2.5	

4. For additional information please refer to application notes on www.mornsun-power.com


Dimensions and Recommended Layout

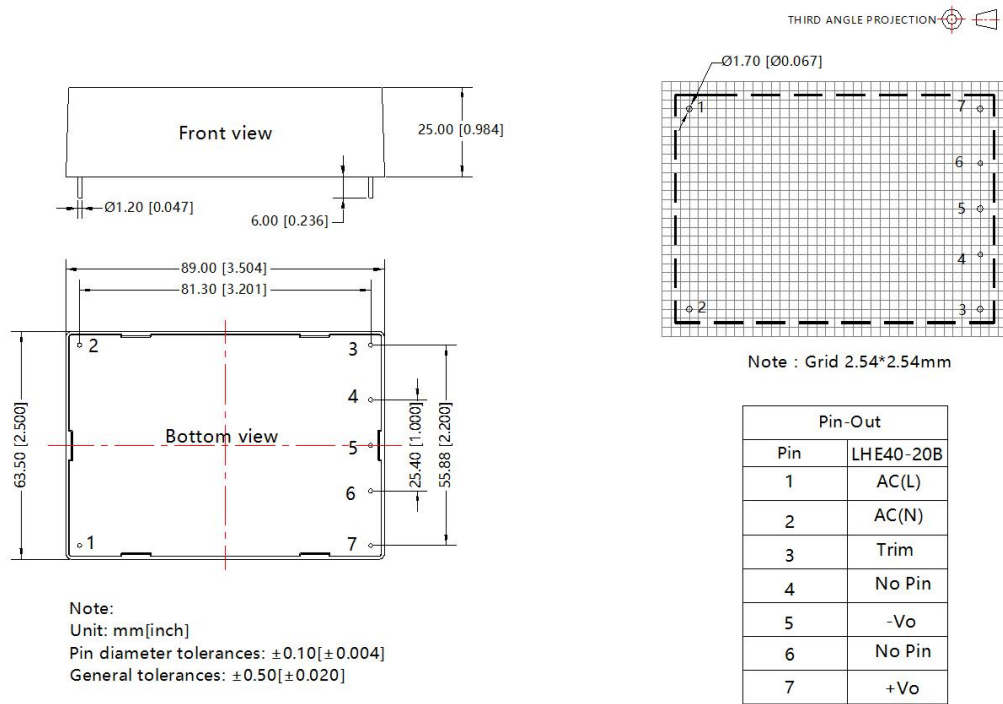


A5 Chassis Package Dimensions

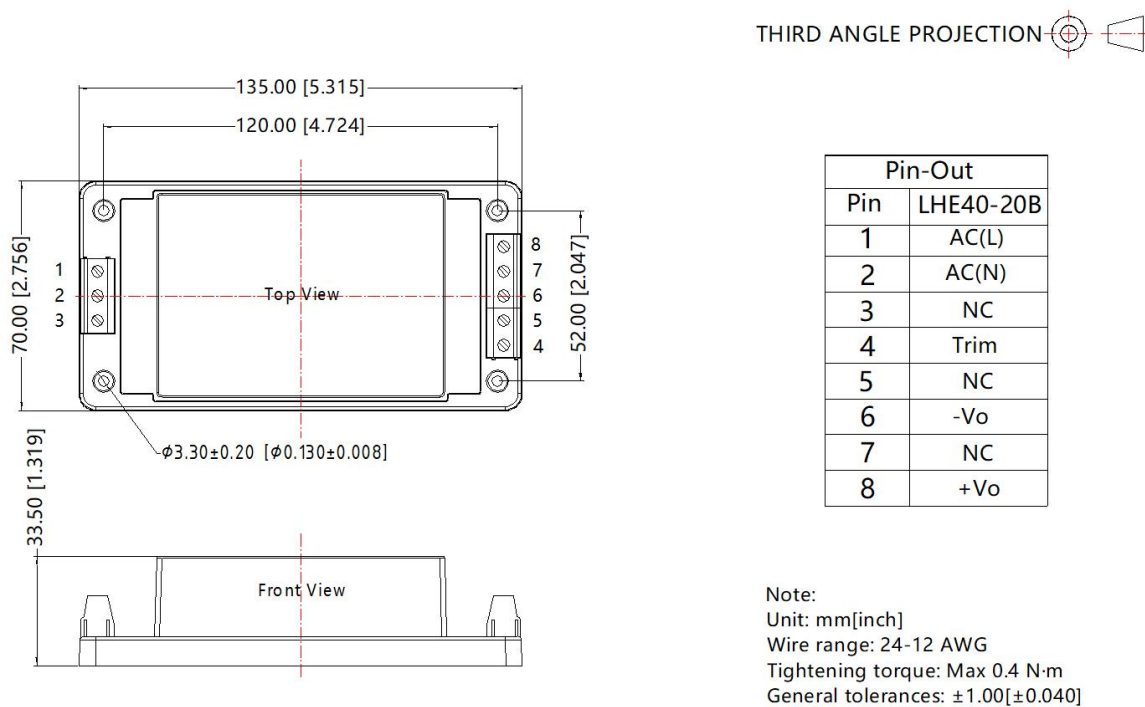

A6 DIN-rail Package Dimensions

THIRD ANGLE PROJECTION 

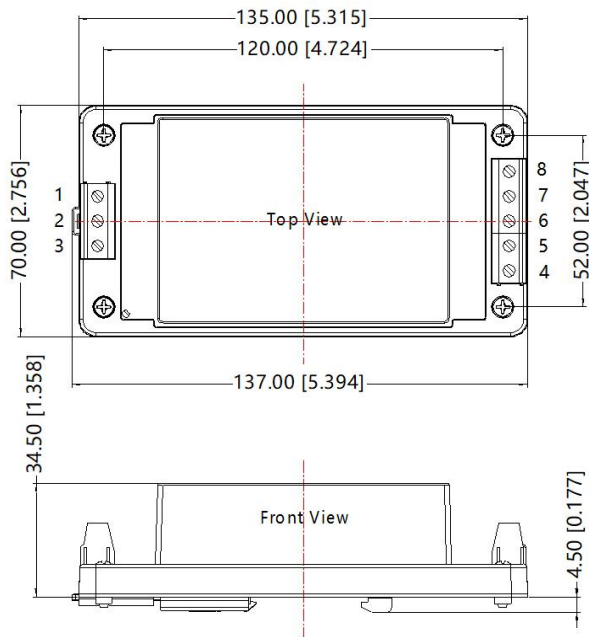

Pin-Out	
Pin	LHE40-20B
1	AC(L)
2	AC(N)
3	NC
4	Trim
5	NC
6	-Vo
7	NC
8	+Vo

Note:
Unit: mm[inch]
Wire range: 24-12 AWG
Tightening torque: Max 0.4 N·m
Mounting rail: TS35, rail needs to connect safety ground
General tolerances: $\pm 1.00[\pm 0.040]$

Notes:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number of Horizontal package: 58220021, the Packaging bag number of A5/A6 package: 58220031;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75% with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on our company corporate standards;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com