



FEATURES

- Universal 85 - 264VAC or 120 - 370VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -30°C to +70°C
- High I/O isolation test voltage up to 4000VAC
- High efficiency, low ripple & noise
- Output short circuit, over-current, over-voltage protection
- Operating altitude up to 5000m
- 3 years warranty

LM150-10D1224-32 is one of Mornsun's dual output non-isolation enclosed AC-DC switching power supply. It features universal AC input and at the same time accepts DC input voltage, high efficiency, high reliability and double or reinforced insulation. And integrated a variety of protection functions, with high cost-effective. The converter offers excellent EMC performance and meets IEC/EN61000-4, CISPR32/EN55032, UL/IEC/EN/BS EN62368, GB4943, IEC/EN60335, IEC/EN61558 standards and It is not only used in areas of industry control, electricity, security, telecommunications, smart home, etc.

Selection Guide

Part No.	Cooling Method	Output Power (W)	Nominal Output Voltage and Current		Output Voltage Adjustable Range (Vo1)*	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (uF)	
			Vo1/Io1	Vo2/Io2			Vo1	Vo2
LM150-10D1224-32	Air cooling	150	+12V/6A	+24V/3.25A	11.4V-12.6V	86	2000	1200

Note:
 1. The product picture is for reference only. For details, please refer to the actual product.
 2. Under any steady-state conditions, the total power of the product should not exceed the rated power. When the output voltage is increased, the total output power cannot exceed the rated output power, when the output voltage is decreased, the output current cannot exceed the rated output current.
 3. *Output voltage adjustable range test conditions: 230VAC, 50% Io.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	--	264	VAC
	DC input	120	--	370	VDC
Input Voltage Frequency	AC input	47	--	63	Hz
Input Current	115VAC	--	--	4	A
	230VAC	--	--	2	
Inrush Current	115VAC	Cold start	--	30	A
	230VAC		--	50	
Start-up Delay Time	rated load	--	--	1	s
Input Fuse	Built-in fuse	--	6.3	--	A
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Accuracy	Full load range (Balanced load)	Vo1	--	±2	--	
		Vo2	--	±3	--	
Line Regulation	Rated load (Balanced load)	Vo1	--	±1	--	
		Vo2	--	±3	--	
Load Regulation	10% - 100% load (Balanced load)	Vo1	--	±1	--	
		Vo2	--	±3	--	
Cross Regulation	Full input voltage range (no-balanced load)	--	--	10	%	
Minimum Load		10	--	--		
Ripple & Noise*	20MHz bandwidth	Vo1	--	--	100	mV

	(peak-peak value)	Vo2	--	--	200	
Temperature Coefficient			--	±0.03	--	%/°C
Hold-up Time	230VAC		--	20	--	ms
Short Circuit Protection	Recovery time <5s after the short circuit disappear.		Hiccup, continuous, self-recover			
Over-current Protection			120% - 200% Io, hiccup, self-recover			
Over-voltage Protection	12V output	Vo1	≤ 18VDC (Hiccup, self-recover)			
	24V output	Vo1	≤ 33.6VDC (Hiccup, self-recover)			
Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to AC-DC Converter Application Notes for specific information.						

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input - ⊕	Electric strength test for 1min., leakage current <5mA	2000	--	--	VAC
	Input - output		4000	--	--	
	Output - ⊕		500	--	--	
	Vo1 - Vo2		500	--	--	VDC
Insulation Resistance	Input - ⊕	Ambient temperature: 25 ± 5°C Relative humidity: < 95%RH, no condensation Test voltage: 500VDC	100	--	--	MΩ
	Input - output		100	--	--	
	Output - ⊕		100	--	--	
Operating Temperature			-30	--	+70	°C
Storage Temperature			-40	--	+85	
Operating Humidity	Non-condensing		--	--	95	%RH
Storage Humidity			--	--	75	
Switching Frequency			--	65	--	kHz
Power Derating	Operating temperature derating	+50°C to +70°C	2.5	--	--	% / °C
	Input voltage derating	85VAC - 110VAC	2	--	--	
	Altitude derating	2000m - 5000m	5	--	--	°C / Km
Leakage Current	240VAC, 60Hz	Touch current	≤ 0.5mA			
Safety Standards			Design refer to UL/IEC/EN/BS EN62368, GB4943, IEC/EN60335, IEC/EN61558			
Safety Class			CLASS I			
MTBF	MIL-HDBK-217F@25°C		≥ 300,000 h			
Warranty	Ambient temperature: <50°C		3 years			

Environmental Characteristics

Item	Operating Conditions	Standard
High and Low Temperature Working	+70°C, -30°C	GB2423.1, IEC60068-2-1
Sinusoidal Vibration	10 - 500Hz, 5g, 60 minutes in each direction of X, Y, Z axis	GB2423.10, IEC60068-2-6
Low Temperature Storage	-40°C	GB2423.1, IEC60068-2-1
High Temperature Storage	+85°C	GB2423.2, IEC60068-2-2
Packaging Drop	1m, one corner, three edges and six sides	GB2423.8, IEC68-2-32

General Specifications

Case Material	Metal (AL1100, SGCC)
Dimensions	159.00 x 97.00 x 30.00mm
Weight	450g (Typ.)
Cooling Method	Air cooling



Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B	
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV/Air ±8KV	
	RS	IEC/EN61000-4-3	10V/m	
	EFT	IEC/EN61000-4-4	±2KV	
	Surge	IEC/EN61000-4-5	line to line ±1KV/line to PE ±2KV	
	CS	IEC/EN61000-4-6	10Vr.m.s	
	PMS	IEC/EN61000-4-8	30A/m	
	Voltage variation*	IEC61000-6-2/IEC61000-4-11	70% Un, 25/30 cycle(50/60Hz) 40% Un, 0/12 cycle(50/60Hz) 0% Un, 1 cycle	perf. Criteria B
	voltage interruption*	IEC61000-6-2/IEC61000-4-11	0% Un, 250/300 cycle(50/60Hz)	perf. Criteria C

Note:



- perf. Criteria:
 - A: The equipment shall continue to operate as intended without operator intervention;
 - B: After the test, the equipment shall continue to operate as intended without operator intervention;
 - C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.
- This power supply does not meet the harmonic current requirements specified in EN61000-3-2. Please do not use this power supply under the following conditions:
 - (1) The terminal equipment is used in the European Union.
 - (2) Supporting terminals are connected to a public power grid with 220VAC or a higher voltage that comply with the requirements of EN61000-3-2.
 - (3) The power supply is installed in terminal equipment with average or continuous input power greater than 75W.
 - (4) The power supply belong to a part of lighting system.
 Exception: The power supply used in the following terminal equipment does not need to meet EN61000-3-2.
 - (1) Professional equipment with a total rated input power greater than 1000W.
 - (2) Symmetrically controlled heating element with a rated power less than or equal to 200W.
- If no harmonic current is required or customers can solve harmonic current problems by themselves, this product can be used.
- *Un is the maximum input nominal voltage.

Product Characteristic Curve

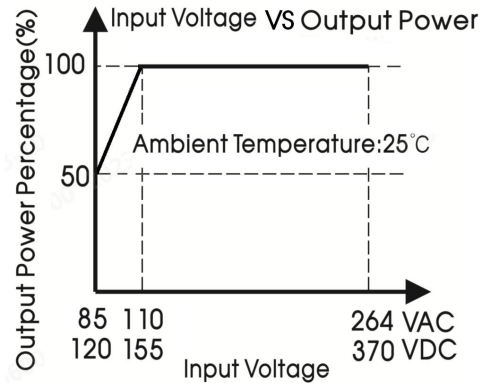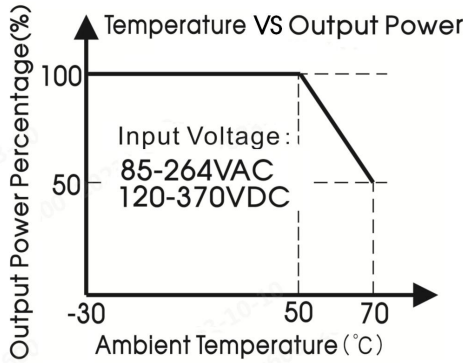


Note:


- With an AC input voltage between 85-110VAC and a DC input between 120-155VDC the output power must be derated as per the temperature derating curves;
- This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

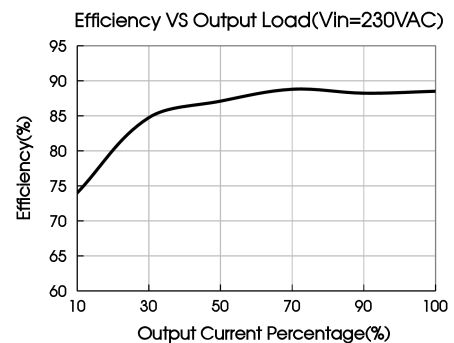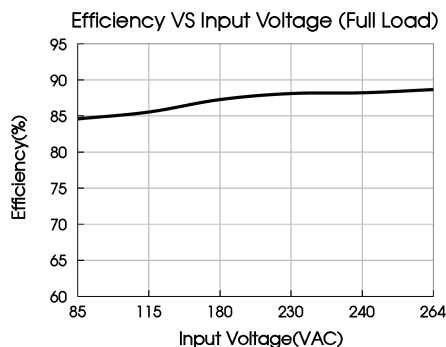

Dimensions and Recommended Layout

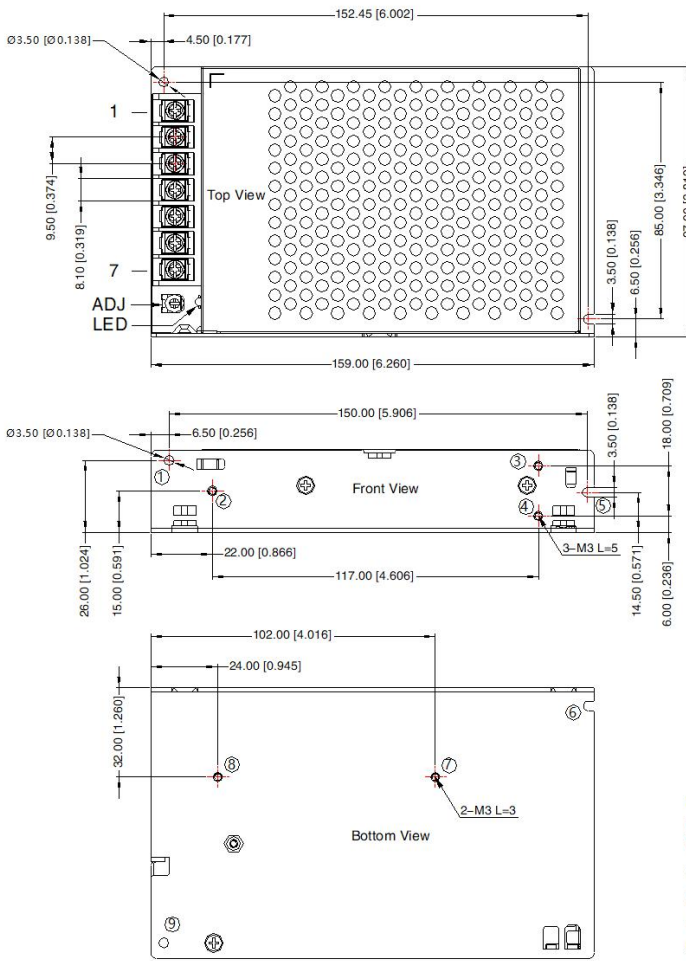


THIRD ANGLE PROJECTION



Pin-Out	
Pin	Function
1	AC(L)
2	AC(N)
3	⊕
4	-Vo2
5	Vo2
6	-Vo1
7	Vo1

Position	Screw Spec.	L(max)	Torque(max)
② - ④	M3	5mm	0.4N · m
⑦ - ⑧	M3	3mm	0.4N · m

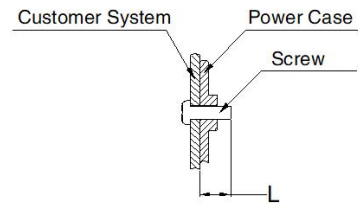

Note:
Unit: mm[inch]
Wire range: 22-12AWG
Connector tightening torque: M3.5, Max 0.8N · m
General tolerances: ± 1.00[± 0.039]
ADJ: Output adjustable resistance increases clockwise,decreases counterclockwise
① - ⑨ any position must be connected to PE

- Note:
- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220111;
 - Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity <75%RH with nominal input voltage and rated output load;
 - The room temperature derating of 5°C/1000m is needed for operating altitude greater than 2000m;
 - All index testing methods in this datasheet are based on our company corporate standards;
 - In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
 - We can provide product customization service, please contact our technicians directly for specific information;
 - Products are related to laws and regulations: see "Features" and "EMC";
 - The out case needs to be connected to PE (⊕) of system when the terminal equipment in operating;
 - The output voltage can be adjusted by the ADJ, clockwise to increase;
 - Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
 - The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com