



### FEATURES

- AC Input voltage range: 90 - 132VAC/180 - 264VAC
- DC Input voltage range: 255 - 370VDC
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -40°C to +70°C
- High efficiency, low ripple & noise
- High I/O isolation test voltage up to 4000VAC
- 200% peak load output for 5 second
- Output short circuit, over-current, over-voltage, over-temperature protection
- Operating altitude up to 5000m
- Meets pollution degree 3
- Conformal coating on both sides of the substrate
- 3 years warranty

LM600-20BxxS series is one of enclosed AC-DC switching power supplies. They feature universal AC input and at the same time accept DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and double or reinforced isolation. These converters offer excellent EMC performance and meet UL/EN/BS EN/IEC62368, EN/IEC60335, EN61558, EN62477, GB4943 standards and they are widely used in areas of industrial, LED, street light control, security, telecommunications, smart home, etc.

### Selection Guide

Certification	Part No.	Cooling Method	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)*	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (uF)
EN/BS EN	LM600-20B24S	Forced air cooling	600	24V/25A	22.8-26.4	91	10000
	LM600-20B36S		597.6	36V/16.6A	34.2-39.6	92	8000
	LM600-20B48S		600	48V/12.5A	45.6-52.8	92	6000

- Note:
1. If the terminal cover is required, please order "PJA-049" for self-installation.
  2. \*Under any conditions, the total power of the product should not exceed the rated power. When the output voltage is increased, the total output power cannot exceed the rated output power, when the output voltage is decreased, the output current cannot exceed the rated output current.
  3. The product picture is for reference only. For details, please refer to the actual product.

### Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	Rated input (Certified voltage)		100	--	120	VAC
			200	--	240	
	AC input	Low voltage (switch in position of 115)	90	--	132	
		High voltage (switch in position of 230)	180	--	264	
	DC input	Switch in position of 230	255	--	370	VDC
Input Voltage Frequency	AC input		47	--	63	Hz
Input Current	115VAC		--	12	--	A
	230VAC		--	7.5	--	
Inrush Current	115VAC		--	35	--	
	230VAC		--	60	--	
Start-up Delay Time	115VAC/230VAC		--	1300	--	ms
Input Fuse	Built-in fuse		--	16	--	A
Hot Plug			Unavailable			

### Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	24V/36V/48V	--	±1	--	%

Line Regulation	Rated load		--	±0.5	--	
Load Regulation	0% - 100% load	24V/36V/48V	--	±0.5	--	
Minimum Load			0	--	--	
Stand-by Power Consumption	230VAC input		--	5	10	W
Ripple & Noise*	20MHz bandwidth	24V	--	--	240	mV
	(peak-peak value)	36V/48V	--	--	360	
Temperature Coefficient			--	±0.03	--	%/°C
Hold-up Time	115VAC, rated load		--	16	--	ms
	230VAC, rated load		--	20	--	
Output Peak Power	230VAC input, 200% Io		--	5	--	s
Short Circuit Protection			Hiccup, continuous, self-recover			
Over-current Protection	230VAC		105% - 200%Io, constant voltage mode, shut down after 5s, self-recover			
Over-voltage Protection	24V		27.6-32.4V (Hiccup, self-recover)			
	36V		41.4-48.6V (Hiccup, self-recover)			
	48V		55.2-64.8V (Hiccup, self-recover)			
Over-temperature Protection			Hiccup, output voltage turn off, self-recover			

Note: \*The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.

### General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input - ⊕	Electric strength test for 1min., leakage current <5mA	2000	--	--	VAC
	Input - output		4000	--	--	
	Output - ⊕		500	--	--	
Insulation Resistance	Input - ⊕	Ambient temperature: 25 ± 5°C Relative humidity: < 95%RH, non-condensing Test voltage: 500VDC	50	--	--	MΩ
	Input - output		50	--	--	
	Output - ⊕		50	--	--	
Operating Temperature			-40	--	+70	°C
Storage Temperature			-40	--	+85	°C
Operating Humidity	Non-condensing		10	--	95	%RH
Storage Humidity			20	--	90	
Power Derating	Operating temperature derating	-40°C to -20°C	3	--	--	% / °C
		+45°C to +70°C	2	--	--	
	Input voltage derating	90VAC-100VAC	2	--	--	% / VAC
		180VAC-200VAC	1	--	--	
Touch Leakage Current	240VAC, 60Hz		<0.75mA			
Safety Standards			EN/BS EN62368-1(Report) safety approved; Design refer to UL/IEC62368-1, EN62477-1, IEC/EN60335-1, EN61558-1, GB4943.1			
Safety Class			CLASS I			
MTBF	MIL-HDBK-217F@25°C		≥300,000 h			
Warranty	Ambient temperature: <70°C		3 years			

### General Specifications

Case Material	Metal (AL5052, SGCC)
Dimensions	225.00mm x 124.00mm x 41.00mm
Weight	910g (Typ.)
Cooling Method*	Forced air cooling

Note: \*Cooling method and power derating refer to typical characteristic curves.



### Electromagnetic Compatibility (EMC)

Emissions	CE (Input port)	CISPR32 EN55032	150K - 30MHz	CLASS A
	RE	CISPR32 EN55032	30MHz - 1GHz	CLASS A
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV/Air ±8KV	perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	
	EFT (Input port)	IEC/EN61000-4-4	±4KV	
	EFT (Output port)	IEC/EN61000-4-4	±2KV	
	Surge (Input port)	IEC/EN61000-4-5	line to line ±2KV/line to PE ±4KV	
	Surge (Output port)	IEC/EN61000-4-5	line to line ±0.5KV/line to PE ±1KV	
	MS	IEC/EN61000-4-8	30A/m	
	CS	IEC/EN61000-4-6	0.15 - 80MHz 10Vr.m.s	
	Voltage variation*	IEC61000-6-2/IEC61000-4-11	70% Un, 25/30 cycle(50/60Hz) 40% Un, 10/12 cycle(50/60Hz) 0% Un, 1 cycle	perf. Criteria B
	Voltage interruption*	IEC61000-6-2/IEC61000-4-11	0% Un, 250/300 cycle(50/60Hz)	perf. Criteria C



Note:

- The power supply does not meet the requirements of harmonic current stipulated in EN61000-3-2; This power supply is not suitable for the following situations.
  - The terminal equipment is used in the European Union.
  - The terminal equipment is connected to public mains supply with 220VAC or greater rated nominal voltage that mandatory to meet the requirements of EN61000-3-2.
  - The power supply is installed in terminal equipment with average or continuous input power greater than 75W.
  - The power supply belong to a part of lighting system.
 In addition, the power supply can be used in the following terminals which do not need to meet EN61000-3-2;
  - Professional equipment with total fixed input power greater than 1000W;
  - symmetrical controlled heating element with rated power less than or equal to 200W.
- If no harmonic current is required or customers can solve harmonic current problems by themselves, this product can be used.
- \*Un is the maximum input nominal voltage.

### Product Characteristic Curve

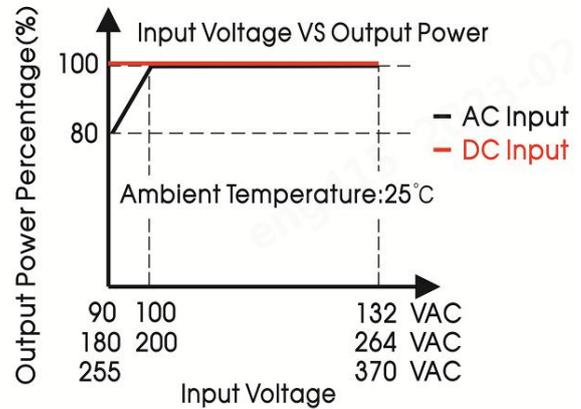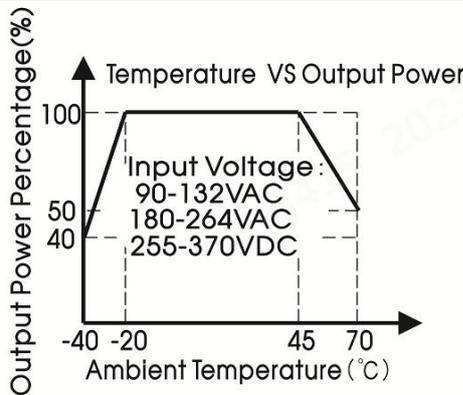


Note: 1. With an AC input voltage between 90 - 100VAC/180 - 200VAC must be derated as per the temperature derating curves;  
 2. This product is suitable for applications using forced air cooling; for applications in closed environment please consult our FAE.

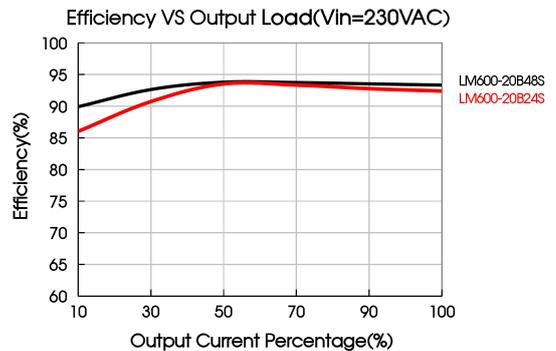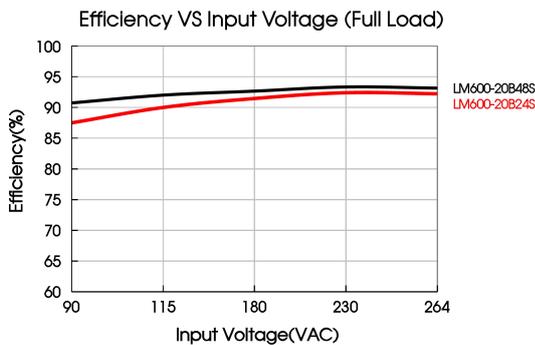

### Note:

The product is equipped with a built-in cooling fan. Keep the air intake clear of debris. If the environment cannot meet this requirement, a fanless model is recommended.

### Dimensions and Recommended Layout

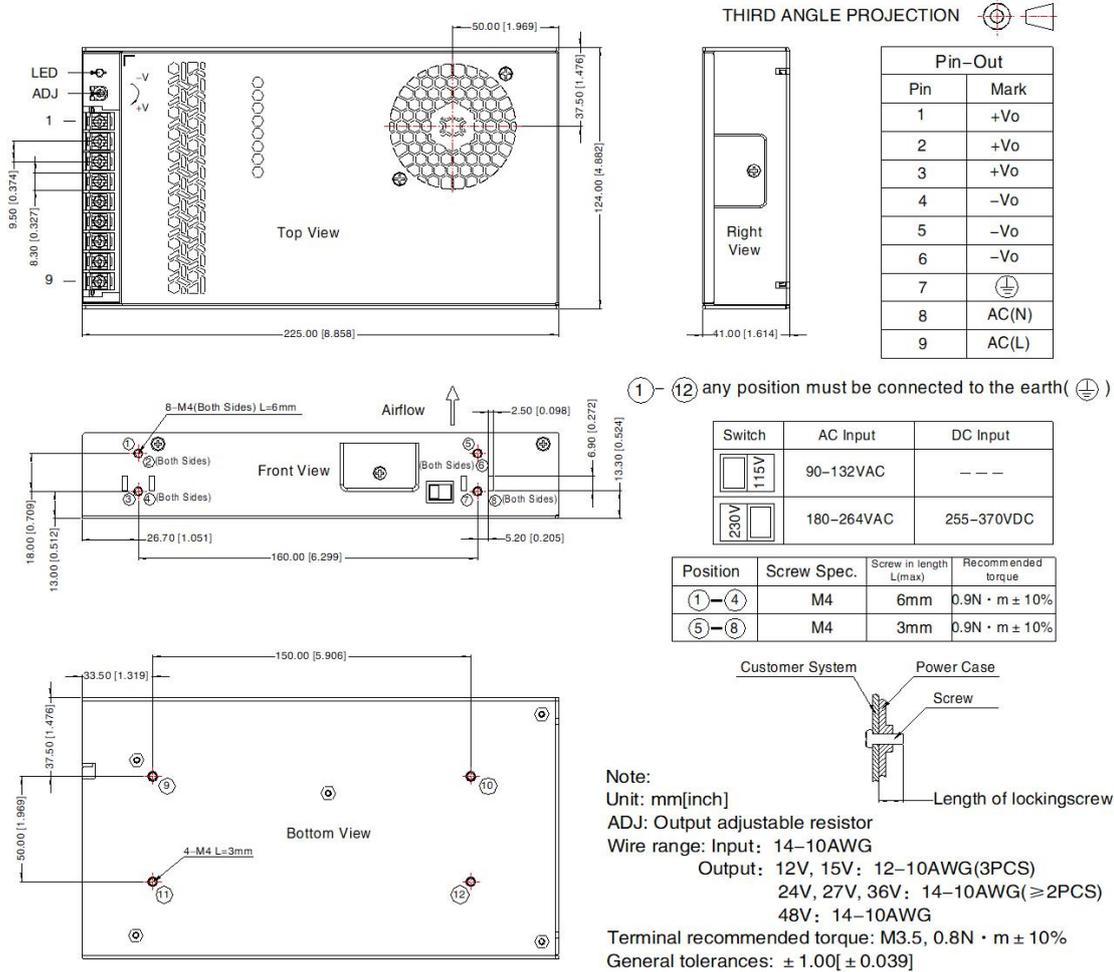

### Note:

- For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58220569;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity <75%RH with nominal input voltage and rated output load;
- The room temperature derating of  $5^{\circ}\text{C}/1000\text{m}$  is needed for operating altitude greater than 2000m;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The out case needs to be connected to PE (⊕) of system when the terminal equipment in operating;
- The output voltage can be adjusted by the ADJ, clockwise to increase;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
- The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

## Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: [info@mornsun.cn](mailto:info@mornsun.cn)

[www.mornsun-power.com](http://www.mornsun-power.com)