



FEATURES

- Universal 90 - 264VAC or 120 - 373VDC Input voltage
- Operating ambient temperature range: -30℃ to +70℃
- High efficiency, high reliability, long service life
- LED indicator for power on
- Output short circuit, over-current, over-voltage protection
- High I/O isolation test voltage up to 3000VAC
- Withstand 5G vibration test
- Operating altitude up to 5000m



LM75-10Dxx series of power converter design features two isolated output versions, which can independently supply two different loads in the system that need to be isolated from each other. The products can be used in harsh working environments with an ambient temperature range from -30℃ to +70℃, without the need of a fan for further heat dissipation. In addition, the converters EMC immunity performance meets the requirements of IEC61000 standard and meet emission standard CISPR32/EN55032, class B without any external components, thus providing excellent EMC protection. The products also meet IEC/EN/UL62368, EN60335, GB4943 safety standards. The converters integrate a variety of protection features and offer a high-performance to low-cost ratio providing the best power solution for a variety of industries such as industrial control equipment, instrumentation and smart home and building equipment application.

Selection Guide

| Certification | Part No. | Output Power | Nominal Output Voltage and Current(Vo/Io) | | Working Current Range* | | Efficiency at 230VAC (%) | Max. Capacitive Load (μF) | |
|-----------------|-----------------|--------------|---|-------------|------------------------|----------|--------------------------|---------------------------|------|
| | | | Vo1/Io1 | Vo2/Io2 | Io1 | Io2 | | Vo1 | Vo2 |
| EN/ BIS/UKCA | LM75-10D0512-30 | 71W | +5VDC/7.0A | +12VDC/3.0A | 0.7-8.0A | 0.3-4.0A | 82 | 7000 | 3000 |
| | LM75-10D0524-20 | 73W | +5VDC/5.0A | +24VDC/2.0A | 0.5-6.0A | 0.2-3.0A | 84 | 5000 | 2000 |
| EN/BIS | LM75-10D0512-40 | 68W | +5VDC/4.0A | +12VDC/4.0A | 0.4-5.0A | 0.4-5.0A | 82 | 7000 | 3000 |

Note: 1. * Working current range: If any one of the 2 outputs arrive at the maximum current, the total output power cannot exceed the rated power and working time < 3s.

2. *Use suffix "Q" for conformal coating.

Input Specifications

| Item | Operating Conditions | | Min. | Typ. | Max. | Unit | |
|---------------------|----------------------|------------|-------------|------|------|------|--|
| Input Voltage Range | AC Input | | 90 | -- | 264 | VAC | |
| | DC Input | | 120 | -- | 373 | VDC | |
| Input Frequency | | | 47 | -- | 63 | Hz | |
| Input Current | 115VAC | | -- | -- | 1.7 | A | |
| | 230VAC | | -- | -- | 0.9 | | |
| Inrush Current | 115VAC | Cold start | -- | 30 | -- | | |
| | 230VAC | | -- | 45 | 50 | | |
| leakage Current | 240VAC | | <2.0mA | | | | |
| Hot Plug | | | Unavailable | | | | |

Output Specifications

| Item | Operating Conditions | | | Min. | Typ. | Max. | Unit |
|-------------------------|------------------------------------|-----|-----------------|------|------|------|------|
| Output Voltage Accuracy | Full load range | Vo1 | | -- | ±2 | -- | |
| | | Vo2 | LM75-10D0512-30 | -- | ±8.0 | -- | |
| | | | LM75-10D0524-20 | -- | ±8.0 | -- | |
| | | | | -- | ±8.0 | -- | |
| Line Regulation | Full load | Vo1 | | -- | ±0.5 | ±1.0 | % |
| | | Vo2 | LM75-10D0512-30 | -- | ±1.5 | -- | |
| | | | LM75-10D0524-20 | -- | ±1.5 | -- | |
| | | | | -- | ±1.5 | -- | |
| Load Regulation | 10% - 100% load (Balanced load) | Vo1 | | -- | ±0.5 | -- | |
| | | Vo2 | LM75-10D0512-30 | -- | ±5.0 | -- | |
| | | | LM75-10D0524-20 | -- | ±5.0 | -- | |
| | | | | -- | ±5.0 | -- | |

AC/DC 75W Enclosed Switching Power Supply

LM75-10Dxx, LM75-10Dxx-Q Series

MORNSUN®

| | | | | | | | |
|--|---|-----|-----------------|------------------------------------|-------|------|------|
| Ripple & Noise* | 20MHz bandwidth (peak-peak value) | Vo1 | | -- | 80 | -- | mV |
| | | Vo2 | LM75-10D0512-30 | -- | 120 | -- | |
| | | | LM75-10D0524-20 | -- | 150 | -- | |
| Temperature Coefficient | Vo1 | | | -- | ±0.03 | -- | %/°C |
| Voltage Adjustable Range* | Rated input voltage | | | 4.75 | -- | 5.50 | VDC |
| Switching Delay Time | Rated input voltage | | | -- | -- | 3.0 | s |
| Output Voltage Rise Time | 115/230VAC | | | -- | -- | 30 | ms |
| Hold-up Time | 115VAC | | | 5 | -- | -- | |
| | 230VAC | | | 30 | -- | -- | |
| Min. Load | | | | Refer to the working current range | | | |
| Short Circuit Protection | Recovery time <5s after the short circuit disappear | | | Hiccup, continuous, self-recover | | | |
| Over-current Protection | 2 outputs with equal-scale load | | | 110%≤Io, self-recover | | | |
| Over-voltage Protection | | | | 5.75VDC ≤Vo1≤6.75VDC, Hiccup | | | |
| Note: 1.*The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information. | | | | | | | |
| 2.*When Vo1 working in the adjustable range, the output power please refer to power derating curve and should not be exceed the rated output power. | | | | | | | |

General Specifications

| Item | | Operating Conditions | | Min. | Typ. | Max. | Unit |
|-----------------------|--------------------------------|---|-----|--|------|------|------|
| Isolation Voltage | Input - Output | Electric Strength Test for 1min., leakage current <10mA | | 3000 | -- | -- | VAC |
| | Input - ⊕ | | | 2000 | -- | -- | |
| | Output - ⊕ | | | 500 | -- | -- | |
| | Output Vo1 - Output Vo2 | | | 500 | -- | -- | VDC |
| Insulation Resistance | Input-Output | Environment temperature: 25±5℃, Relative humidity: <95%RH, non-condensing Testing voltage: 500VDC | | 100 | -- | -- | MΩ |
| | Input - ⊕ | | | 100 | -- | -- | |
| | Output - ⊕ | | | 100 | -- | -- | |
| Operating Temperature | | Non-condensing | | -30 | -- | +70 | ℃ |
| Storage Temperature | | | | -40 | -- | +85 | |
| Operating Humidity | | | | 20 | -- | 90 | %RH |
| Storage Humidity | | | | 10 | -- | 95 | |
| Power Derating | Input voltage derating | 90VAC - 115VAC | 0.8 | -- | -- | %VAC | |
| | | 115VAC - 264VAC | 0 | -- | -- | | |
| | | 120VDC - 160VDC | 0.5 | -- | -- | %VDC | |
| | | 160VDC - 373VDC | 0 | -- | -- | | |
| | Operating temperature derating | -30℃ to +45℃ | 0 | -- | -- | %℃ | |
| | | +45℃ to +70℃ | 2.0 | -- | -- | | |
| Safety Standard | | | | IS 13252 (Part1) Safety Approval & EN/BS EN 62368-1 Design refer to IEC/UL/EN62368-1, EN60335-1, GB4943.1 | | | |
| Safety Class | | | | CLASS I | | | |
| MTBF | | MIL-HDBK-217F@25℃ | | >300,000 h | | | |

Physical Specifications

| | |
|----------------|---------------------------|
| Case Material | Metal (AL1100, SGCC) |
| Dimension | 129.00 x 97.00 x 30.00 mm |
| Weight | 310g (Typ.) |
| Cooling Method | Free air convection |

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.09.18-A/5



Page 2 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

EMC Specifications



| | | | | |
|-----------|--|------------------|---------------------------------------|------------------|
| Emissions | CE | CISPR32/EN55032 | CLASS B | |
| | RE | CISPR32/EN55032 | CLASS B | |
| | Harmonic current | IEC/EN61000-3-2 | CLASS A | |
| Immunity | ESD | IEC/EN61000-4-2 | Contact ±6KV /Air ±8KV | Perf. Criteria A |
| | RS | IEC/EN61000-4-3 | 10V/m | perf. Criteria A |
| | EFT | IEC/EN61000-4-4 | ±2KV | perf. Criteria A |
| | Surge | IEC/EN61000-4-5 | line to line ±2KV/line to ground ±4KV | perf. Criteria A |
| | CS | IEC/EN61000-4-6 | 10 Vr.m.s | perf. Criteria A |
| | Voltage dips, short interruptions and voltage variations | IEC/EN61000-4-11 | 0%,70% | perf. Criteria B |

Product Characteristic Curve

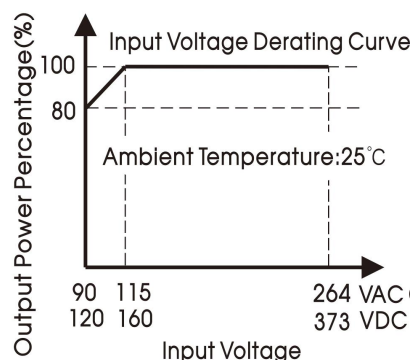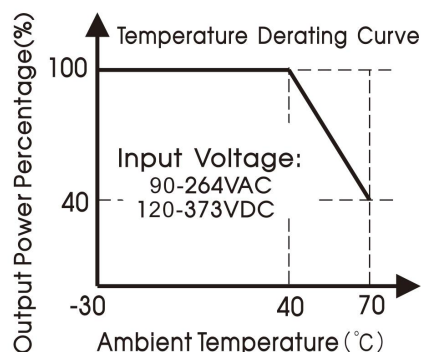

Note: 1、With an input voltage between 90 -115VAC and a DC input between 120-160VDC the output power must be derated as per the temperature derating curves;

2、This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

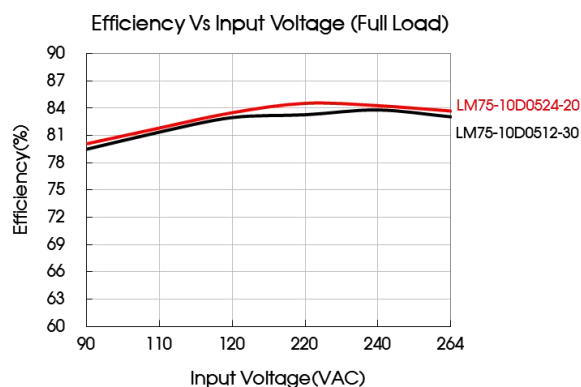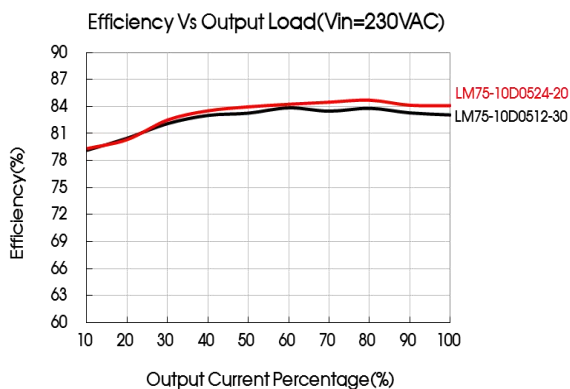


AC/DC 75W Enclosed Switching Power Supply

LM75-10Dxx, LM75-10Dxx-Q Series

MORNSUN®

Dimensions and Recommended Layout

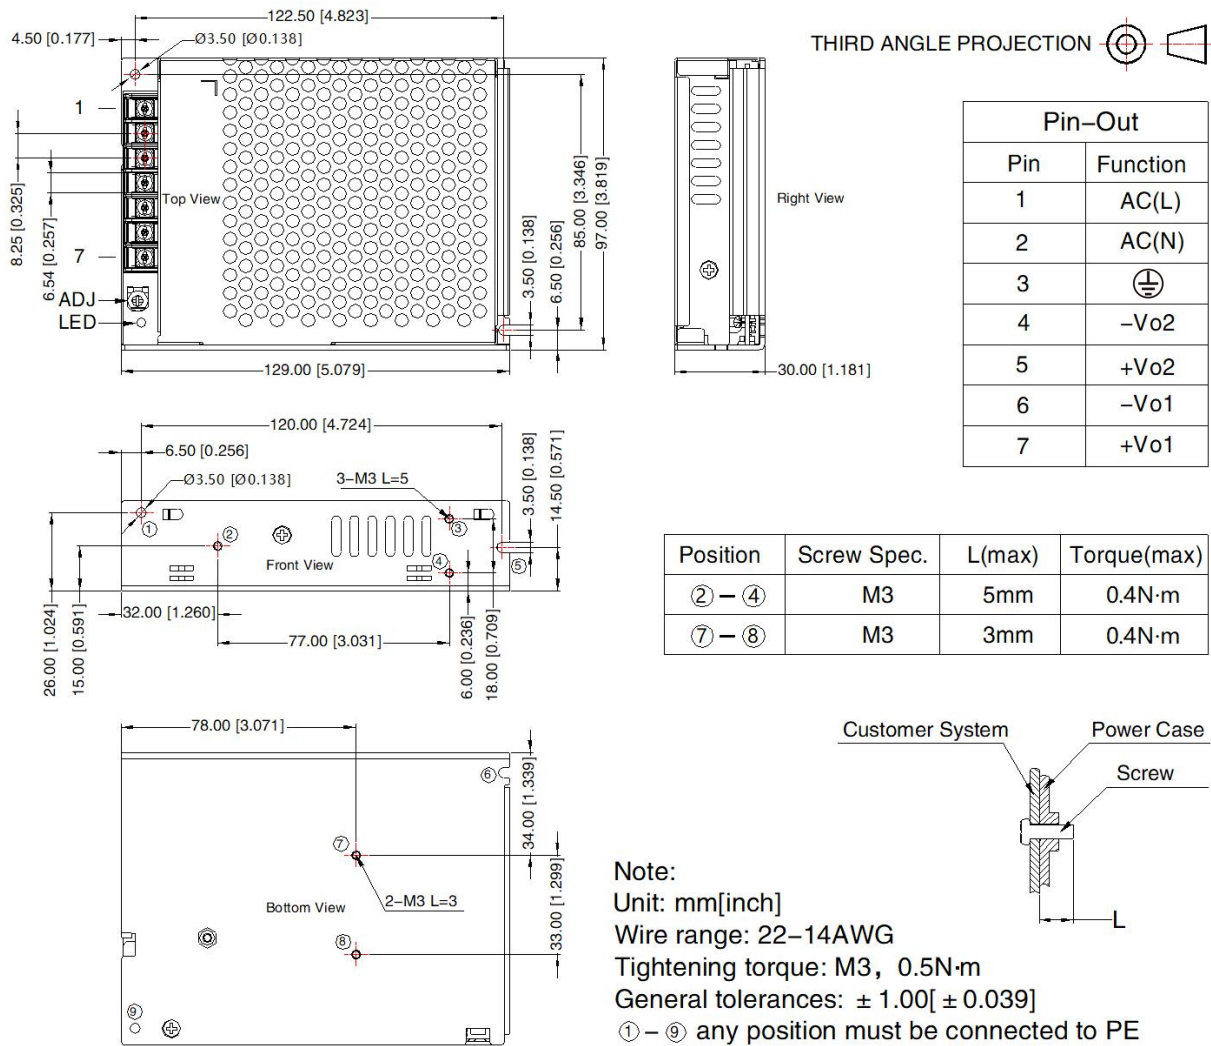

Note:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220065;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency, there will be audible noise generated when work at light load, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The out case needs to be connected to PE (\oplus) of system when the terminal equipment in operating;
- CAUTION: Double pole, neutral fusing. Disconnect mains before servicing."/ / ATTENTION: Double pôle/fusible sur le neutre. Débrancher l'alimentation avant l'entretien;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
- The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.09.18-A/5

Page 4 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation