

30W, special localized power supply for electricity industry & smart grid



RoHS



FEATURES

- Special localized power supply for electricity industry & smart grid
- Ultra-wide 85 - 305VAC and 88- 430VDC input voltage range
- Ultra-wide operating ambient temperature range: -40°C to +85°C
- High reliability, low output ripple & noise
- EMI performance meets CISPR32/EN55032 CLASS B
- Immunity meets electricity standard Level 4
- Meets impulse voltage requirements of 1.2/50us 5KV
- Safety according to UL/EN62368, BS EN62368

LO30-23BxxE-GH series is a special localized power supply design for electricity industry and smart grid industry that meets the power industry standards. It features AC input and at the same time accepts DC input voltage, with ultra-wide input voltage range, wide operating temperature range, high EMS level, high reliability, and high isolation. EMC and safety specifications meet IEC/EN61000-4, CISPR32/EN55032, UL/EN62368 standards. It is suitable for smart grid occasions with poor power quality and high reliability requirements, such as smart power transmission and substations. It also can be used in microcomputer protection equipment, bus voltage protection equipment or equipment with high reliability requirements that require 110VDC input voltage.

Selection Guide

Certification	Part No.	Output Power	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range ADJ (V)*	Efficiency at 230VAC (%) Typ.	Capacitive Load (μF) Max.
/	LO30-23B12E-GH	30.0W	12V/2.5A	10.8-13.2	86	15000
	LO30-23B24E-GH	31.2W	24V/1.3A	21.6-26.4	88	2000

Note: *The actual adjustment range may extend outside the values stated, care should be exercised to ensure that the output voltage and power levels remain within the published maximum values; during output voltage adjustment, the product needs to take 50% load.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	--	305	VAC
	DC input	88	--	430	VDC
Input Frequency		47	--	440	Hz
Input Current	115VAC	--	--	750	mA
	230VAC	--	--	450	
Inrush Current	115VAC	--	15	20	A
	230VAC	--	30	40	
Leakage Current	277VAC	0.3mA RMS max.			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	All load range	--	±1.0	--	%
Line Regulation	Rated load	--	±0.4	--	
Load Regulation	230VAC	--	±1.0	--	
Ripple & Noise*	100MHz bandwidth (peak-to-peak value)	--	50	120	mV
Stand-by Power Consumption		--	--	0.5	W
Temperature Coefficient		--	±0.02	--	%/°C
Short Circuit Protection		Hiccup, continuous, self-recovery			
Over-current Protection		≥ 120%Io, self-recovery			
Over-voltage Protection	12VDC output	≤ 16V	Output voltage clamp or hiccup		
	24VDC output	≤ 32.4V			

Minimum Load		0	--	--	%
Start-up Delay Time		--	0.5	1	s
Hold-up Time	115VAC input, Io=100%	--	40	--	ms
	230VAC input, Io=100%	--	160	--	

Note: *The "Tip and barrel method" is used for ripple and noise test, with a 0.1uf ceramic capacitor & 100uf parallel capacitor, please refer to AC-DC Converter Application Notes for specific information.

General Specifications

Item		Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input - output	Electric Strength Test for 1min., leakage current <10mA	4000	--	--	VAC
	Input - PE	Electric Strength Test for 1min., leakage current <5mA	2000	--	--	
	Output - PE	Electric Strength Test for 1min., leakage current <20mA	500	--	--	
Insulation Resistance	Input - output	500VDC	100	--	--	MΩ
	Input - PE					
	Output - PE					
Impulse Withstand Voltage	Input - output	5KV, 1.2/50 us Impulse voltage				
	Input - PE					
Operating Temperature			-40	--	+85	℃
Storage Temperature			-40	--	+85	
Storage Humidity			--	--	90	%RH
Altitude			--	--	5000	m
Switching Frequency			--	65	--	kHz
Power Derating	-40℃ to -25℃		2.0	--	--	%/℃
	Natural air cooling	+55℃ to +70℃	2.0	--	--	
		+70℃ to +85℃	2.66	--	--	
		+65℃ to +70℃	2.0	--	--	
		+70℃ to +85℃	3.33	--	--	
	85VAC - 100VAC		1.33	--	--	%/VAC
	277VAC - 305VAC		0.72	--	--	
	2000m-5000m		5.0	--	--	%/Km
Safety Certification		Design refer to UL/EN62368-1 & BS EN62368-1				
Safety Class		CLASS I				
MTBF		MIL-HDBK-217F@25℃ >300,000 h				





Mechanical Specifications

Dimension	105.00 x 50.00 x 30.00mm
Weight	110g (Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B	
Immunity	ESD	IEC/EN61000-4-2	Contact ±8KV/Air ±15KV	Perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	Perf. Criteria A
	EFT	IEC/EN61000-4-4	±4KV	Perf. Criteria B
	Surge	IEC/EN61000-4-5	Line to line ±2KV/line to ground ±4KV	Perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s	Perf. Criteria A
	Voltage dips, short interruption and voltage variations	IEC/EN61000-4-11	100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods	Perf. Criteria B


Product Characteristic Curve

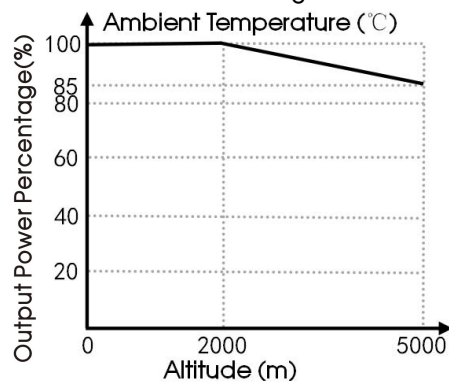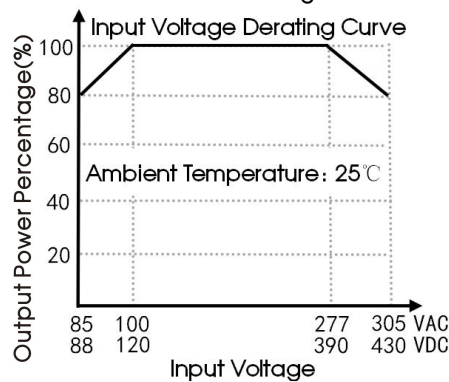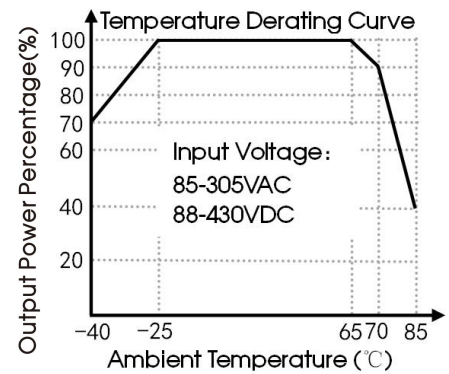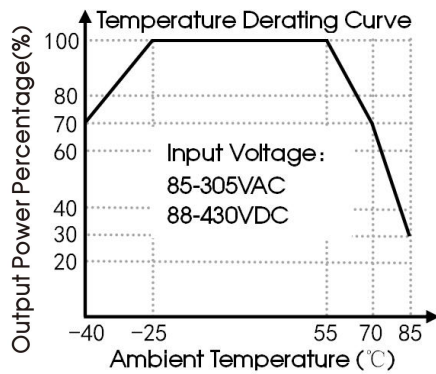


Note: ① With an AC input between 85-100VAC/277-305VAC and a DC input between 88-120VDC/390-430VDC, the output power must be derated as per temperature derating curves;

② This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

Efficiency Vs Input Voltage (Full Load)

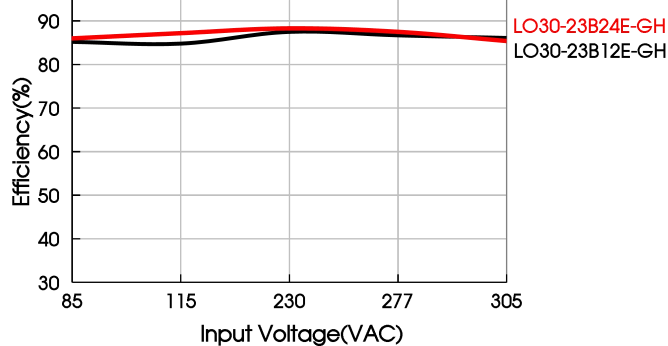

Efficiency Vs Output Load (Vin=230VAC)

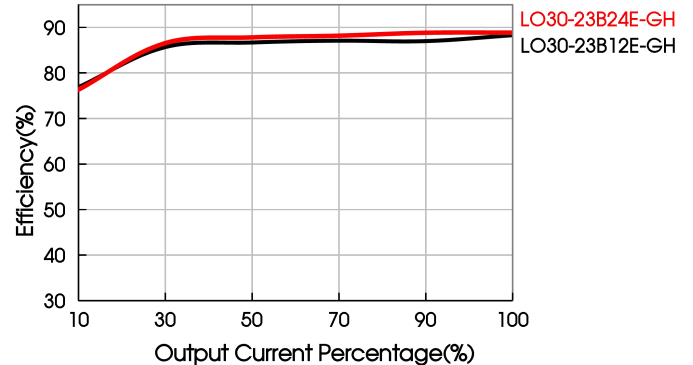

Design Reference

1. Typical application

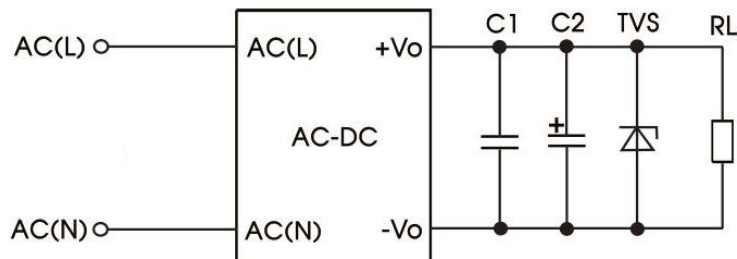


Fig. 1: Typical circuit diagram


Part no.	C1	C2	TVS
LO30-23B12E-GH	0.1μF/50V	100μF/50V	SMBJ20A
LO30-23B24E-GH			SMBJ30A

Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure.

2. For additional information please refer to application notes on www.mornsun-power.com.


Dimensions and Recommended Layout

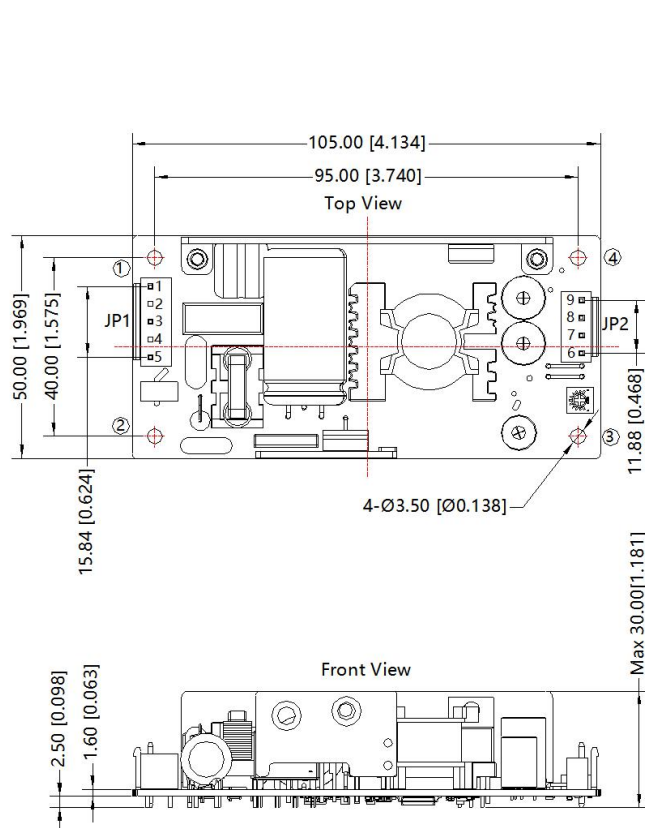

THIRD ANGLE PROJECTION

Pin-Out			
Connectors	Pin	Mark	Client Connectors
JP1	1	PE	Housing: JST VHR Contact: JSTSVH-21T-P1.1 or equivalent
	2	No Pin	
	3	AC(N)	
	4	No Pin	
	5	AC(L)	
JP2	6	+Vo	Housing: JST VHR Contact: JSTSVH-21T-P1.1 or equivalent
	7	+Vo	
	8	-Vo	
	9	-Vo	

Position	Screw Spec.	L(Recommend)	Torque(max)
① - ④	M3	6mm	0.4N·m

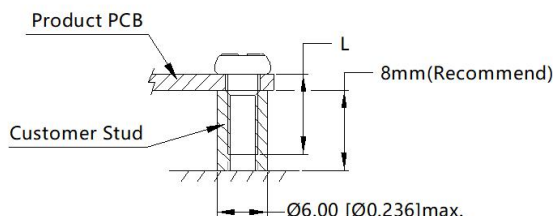

Note:
Unit: mm[inch]
General tolerances: $\pm 0.50[\pm 0.020]$
The layout of the device is for reference only, please refer to the actual product

Note:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220151;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75% with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on our company corporate standards;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com