

75W, specific power supply for power grid



## FEATURES

- Specific power supply designing for smart grid
- Universal 85 - 264VAC or 88 - 370VDC input voltage
- Ultra-wide operating ambient temperature range: -40°C to +85°C
- High reliability, low output ripple & noise
- Immunity meets electricity standard Level 4
- Meets impulse voltage requirements of 1.2/50us 5KV
- Safety according to UL/EN/IEC62368, BS EN 62368

LO75-20BxxE-GH series is a special power supply design for the smart grid industry that meets the power industry standards. It features AC input and at the same time accepts DC input voltage, wide operating temperature range, high EMS level, high reliability, and high isolation. EMC and safety specifications meet IEC/EN61000-4, CISPR32/EN55032, UL/EN/IEC62368 standards. It is suitable for smart grid occasions with poor power quality and high reliability requirements, such as smart power transmission and substations. It also can be used in microcomputer protection equipment, bus voltage protection equipment or equipment with high reliability requirements that require 110VDC input voltage.

## Selection Guide

Certification	Part No.	Output Power	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range ADJ (V)*	Efficiency at 230VAC (%) Typ.	Capacitive Load (μF) Max.
/	LO75-20B05E-GH	60.0W	5V/12.0A	4.5-5.5	84	8500
	LO75-20B09E-GH	75.6W	9V/8.4A	8.1-9.9	86	7500
	LO75-20B12E-GH	76.8W	12V/6.4A	10.8-13.2	87	6800
	LO75-20B15E-GH	75.0W	15V/5.0A	13.5-16.5	88	4700
	LO75-20B24E-GH	76.8W	24V/3.2A	21.6-26.4	89	2200
	LO75-20B27E-GH	75.6W	27V/2.8A	24.3-29.7	89	1200
	LO75-20B48E-GH	76.8W	48V/1.6A	43.2-52.8	90	680

Note: \*The actual adjustment range may extend outside the values stated, care should be exercised to ensure that the output voltage and power levels remain within the published maximum values; during output voltage regulation, the product needs to carry 50% load.

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC Input	85	--	264	VAC
	DC Input	88	--	370	VDC
Input Frequency		47	--	63	Hz
Input Current	115VAC	--	--	1.8	A
	230VAC	--	--	1.1	
Inrush Current	115VAC	--	30	--	
	230VAC	--	55	--	
Leakage Current	240VAC	0.5mA RMS max.			
Hot Plug		Unavailable			

## Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	All load range	--	±2.0	--	%
Line Regulation	Rated load	--	±0.5	--	
Load Regulation	230VAC	--	±1.0	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	--	--	200	mV
Stand-by Power Consumption		--	--	0.5	W
Short Circuit Protection		Hiccup, continuous, self-recovery			



Over-voltage Protection	5VDC output	≤7.25V	Output voltage clamp or hiccup			
	9VDC output	≤13V				
	12VDC output	≤16V				
	15VDC output	≤25V				
	24VDC output	≤35V				
	27VDC output	≤39V				
	48VDC output	≤60V				
Over-current Protection		≥110%Io, self-recovery				
Minimum Load		0	--	--	%	
Start-up Delay Time	85VAC-264VAC input, Io=100%	--	--	500	ms	
Hold-up Time	115VAC input, Io=100%	--	12	--	ms	
	230VAC input, Io=100%	--	80	--		
Note: *The "Tip and barrel method" is used for ripple and noise test, with a 0.1uf ceramic capacitor & 100uf parallel capacitor, please refer to AC-DC Converter Application Notes for specific information.						

## General Specifications

Item		Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input - output	Electric Strength Test for 1min., leakage current <8mA	4000	--	--	VAC
	Input - PE		2000	--	--	
	Output - PE	Electric Strength Test for 1min., leakage current <10mA	500	--	--	
Insulation Resistance	Input - output	500VDC	50	--	--	MΩ
	Input - PE					
	Output - PE					
Impulse Withstand Voltage	Input - output	5KV, 1.2/50 us Impulse voltage				
	Input - PE					
Operating Temperature			-40	--	+85	℃
Storage Temperature			-40	--	+105	
Storage Humidity			--	--	90	%RH
Altitude*			--	--	5000	m
Switching Frequency			--	65	--	kHz
Power Derating	-40℃ to -25℃		2.67	--	--	% /℃
	+40℃ to +50℃	5/9/12/15V	2	--	--	
		24/27/48V	1	--	--	
	+50℃ to +60℃	5/9/12/15V	1	--	--	
		24/27/48V	1	--	--	
	+60℃ to +70℃	5/9/12/15V	2	--	--	
		24/27/48V	3	--	--	
	+70℃ to +85℃		1.33	--	--	
	85VAC - 100VAC		1.33	--	--	%/VAC
		2000m-5000m	5	--	--	%/Km
Safety Standard		Design refer to UL/EN/IEC62368-1 & BS EN 62368-1				
Safety Class		CLASS I				
MTBF		MIL-HDBK-217F@25℃ >300,000 h				

Note: \*For operation of altitude between 2000-5000m, please consult factory or one of our FAE.

## Mechanical Specifications




Dimension	101.60 x 50.80 x 27.00 mm
Weight	140g (Typ.)
Cooling method	Convection air cooling



### Electromagnetic Compatibility (EMC)


Emissions	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS A	
	Harmonic current	IEC/EN61000-3-2	CLASS A	
	Voltage flicker	IEC/EN61000-3-3	CLASS A	
Immunity	ESD	IEC/EN61000-4-2	Contact $\pm 8\text{KV}$ / Air $\pm 15\text{KV}$	Perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	Perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 4\text{KV}$	Perf. Criteria B
	Surge	IEC/EN61000-4-5	Line to line $\pm 2\text{KV}$ / line to ground $\pm 4\text{KV}$	Perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s	Perf. Criteria A
	Voltage dips, short interruption and voltage variations	IEC/EN61000-4-11	100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods	Perf. Criteria B
	Walkie-talkie interference test	MS-SOP-DQC-007		Perf. Criteria B

### Product Characteristic Curve

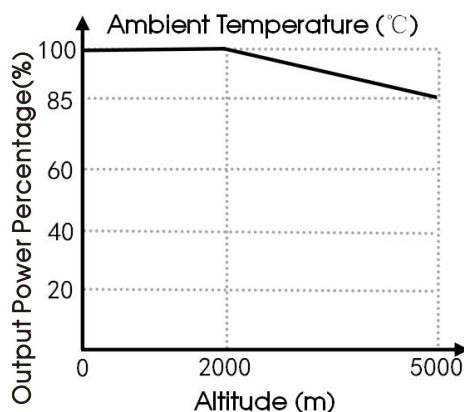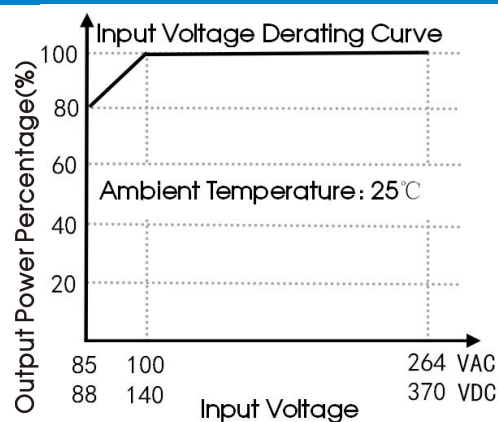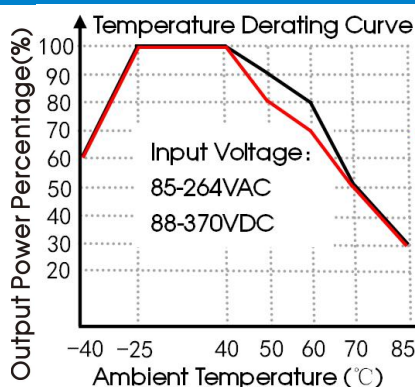


Note: ① With an AC input between 85-100VAC and a DC input between 88-140VDC, the output power must be derated as per temperature derating curves;  
② This product is suitable for applications using convection air cooling; for applications in closed environment please consult factory or one of our FAE.

Efficiency Vs Input Voltage (Full Load)

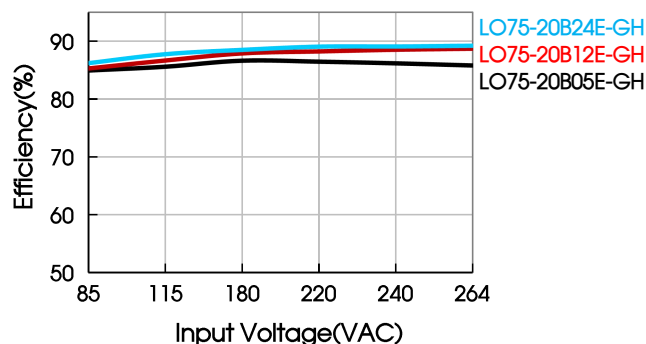

Efficiency Vs Output Load (Vin=230VAC)

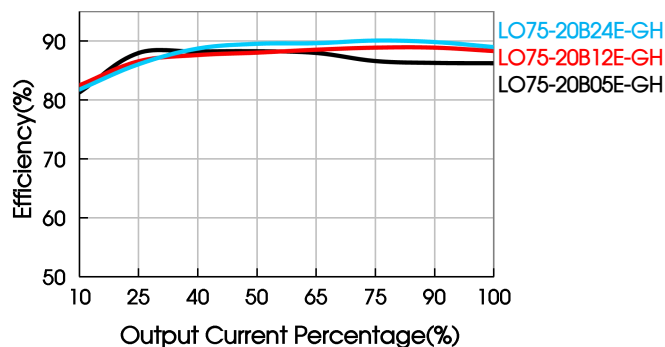



## Design Reference

### 1. Typical application

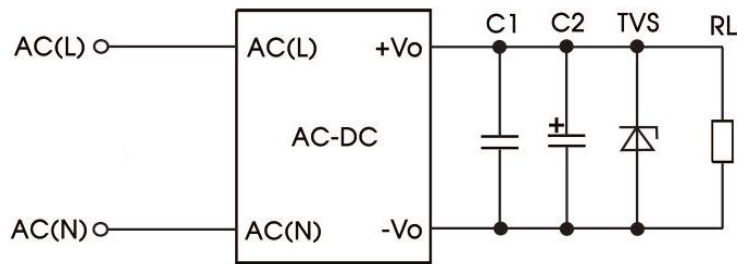


Fig. 1: Typical circuit diagram

Part no.	C1	C2	TVS
LO75-20B05E-GH	0.1μF/250V	100μF/63V	SMBJ7.0A
LO75-20B09E-GH			SMBJ12A
LO75-20B12E-GH			SMBJ20A
LO75-20B15E-GH			SMBJ20A
LO75-20B24E-GH			SMBJ30A
LO75-20B27E-GH			SMBJ30A
LO75-20B48E-GH			SMBJ64A


#### Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure.


2. For additional information please refer to application notes on [www.mornsun-power.com](http://www.mornsun-power.com).

## Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

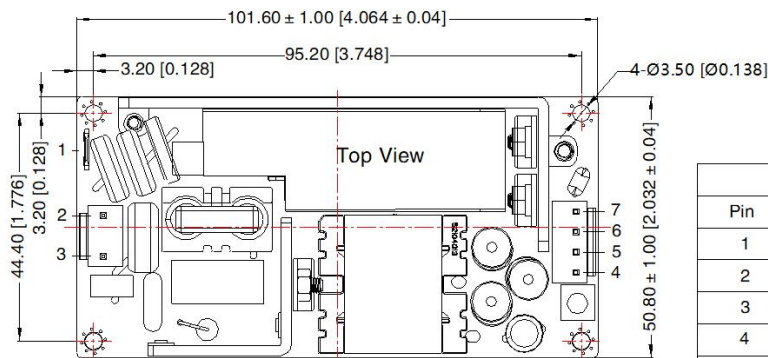

Pin-Out			
Pin	Mark	Connector	Terminal
1	PE	DEGSON K12	KST FDD 5.5–250 or equivalent
2	AC(N)	JST B3P-VH or equivalent	Housing: JST VHR Contact: JST SVH-21T-P1.1 or equivalent
3	AC(L)		
4	-Vo	JST B4P-VH or equivalent	
5			
6	+Vo		
7			

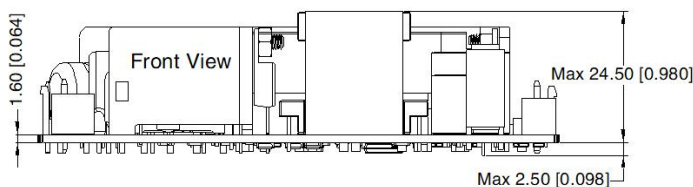

#### Note:

- Unit: mm[inch]
- General tolerances:  $\pm 0.50$  [  $\pm 0.020$  ]
- The layout of the device is for reference only, please refer to the actual product



Note:

1. For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58220192
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity<75% with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on our company corporate standards;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China  
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: [info@mornsun.cn](mailto:info@mornsun.cn) [www.mornsun-power.com](http://www.mornsun-power.com)