

FEATURES

- Universal 90 - 264VAC or 127 - 370VDC input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -40°C to +70°C
- Built-in active PFC function
- High I/O isolation test voltage up to 4000VAC
- Extremely low leakage current <0.1mA
- Stand-by power consumption <1.0W
- The base plate with conformal coating
- Output short circuit, over-current, over-voltage protection, over-temperature protection
- Installing in system of Safety Class I (with PE), Class II (no PE) is available
- 5 years warranty
- Suitable for BF application
- Operating altitude up to 5000m
- Safety according to GB4943, IEC60335, IEC61558, IEC/EN60601

LOF350-20Bxx-C series is one of Mornsun's enclosed AC-DC switching power supply and suitable for all kinds of BF type (be accessible to patients) medical system equipment. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC performance and meet IEC/EN/UL62368-1, GB4943.1, IEC60950-1, IEC/EN60335-1, IEC/EN61558-1, IEC/EN/ES60601-1 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home, etc.

Selection Guide

Certification	Part No.*	Cooling method	Output Power* (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.*	Max. Capacitive Load (µF)
EN/IEC/BS/BIS	LOF350-20B12-C	Air cooling	180	12V/15A	11.4-12.6	92	6000
		20.5CFM	300	12V/25A			
EN/IEC/BS/BIS	LOF350-20B15-C	Air cooling	180	15V/12A	14.25-15.75	92	5000
		20.5CFM	325	15V/21.67A			
BIS	LOF350-20B18-C	Air cooling	180	18V/10A	17.1-19.9	92.5	4000
		20.5CFM	324	18V/18A			
	LOF350-20B19-C	Air cooling	180.5	19V/9.5A	17.1-19.9	92.5	4000
		20.5CFM	324.9	19V/17.1A			
EN/IEC/BS/BIS	LOF350-20B24-C	Air cooling	199.9	24V/8.33A	22.8-25.2	93	3200
		20.5CFM	350.4	24V/14.6A			
EN/IEC/BS/BIS	LOF350-20B36-C	Air cooling	200.16	36V/5.56A	34.2-37.8	93	2000
		20.5CFM	350.28	36V/9.73A			
EN/IEC/BS/BIS	LOF350-20B48-C	Air cooling	200.1	48V/4.17A	45.6-50.4	94	2000
		20.5CFM	350.4	48V/7.3A			
EN/BS	LOF350-20B54-C	Air cooling	199.8	54V/3.7A	51.3-56.7	94	2000
		20.5CFM	351	54V/6.5A			

Notes: 1.*Under any conditions, the total power of the product should not exceed the rated power. When the output voltage is increased, the total output power cannot exceed the rated output power, when the output voltage is decreased, the output current cannot exceed the rated output current; 2.*When measuring the full load efficiency, the fan should be connected to an external power supply. Fan loss is not included in the input power; 3.*LOF-C Products without shell is also available, named LOF350-20Bxx.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input		90	--	264	VAC
	DC input		127	--	370	VDC
Input Voltage Frequency			47	--	63	Hz
Input Current	115VAC		--	--	4	A
	230VAC		--	--	2	
Inrush Current	115VAC	Cold start	--	50	--	A
	230VAC		--	75	--	
Power Factor	115VAC	Full load	0.98	--	--	--
	230VAC		0.95	--	--	
Leakage Current	240VAC		<0.1mA; Single fault <0.5mA			
Hot Plug			Unavailable			

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy*	Full load range	12V/15V/18V/19V	--	±3	--	%
		24V/36V/48V/54V	--	±2	--	
Line Regulation	Rated load		--	±0.5	--	%
Load Regulation	0% - 100% load		--	±1	--	
Output Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	12V	--	--	120	mV
		15V	--	--		
		18V	--	--		
		19V	--	--	150	
		24V	--	--		
		36V	--	--	200	
		48V	--	--	250	
		54V	--	--		
Temperature Coefficient			--	±0.03	--	%/°C
Minimum Load			0	--	--	%
Hold-up Time	230VAC, full load	Free air convection	12	14	--	ms
		20.5CFM	6	8	--	
Stand-by Power Consumption	230VAC		--	--	1.0	W
Short Circuit Protection	recover time <5s after the short circuit disappear		Hiccup, continuous, self-recover			
Over-current Protection			≥110%Io, self-recover			
Over-voltage Protection	12V		≤15.0V		Output voltage turn off, re-power on for recover	
	15V		≤18.5V			
	18V		≤23.7V			
	19V		≤23.7V			
	24V		≤30.0V			
	36V		≤45.0V			
	48V		≤59.5V			
	54V		≤63.0V			
Over-temperature Protection*			Output voltage turn off, re-power on for recover after the temperature drops.			
Fan power *	12V/15V/24V/36V/48V/54V		Offer output power of 12V/0.5A with output voltage accuracy ±15%			
	18V/19V		Offer output power of 12V/0.5A with output voltage accuracy -15% - +25%			

Notes: 1.* Output Voltage Accuracy: including setting error, line regulation, load regulation;
 2.* The "Tip and barrel method" is used for ripple and noise test, output parallel 10uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to AC-DC Converter Application Notes for specific information;
 3.* When the product works under light load ($\leq 10\%I_o$), in order to improve efficiency, the value of ripple & noise will be 1.5 times of the full load specification;
 4.* For all the above test items, please refer to our company standard "AC-DC Black Box Test Specification" for specific test specifications and methods;
 5.* For fan power connection method, please refer to pin 6/7 of the dimension drawing.

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation Test	Input - ⊕	Electric Strength Test for 1min., leakage current <10mA	2000	--	--	VAC
	Input-output		4000	--	--	
	Output - ⊕		1500	--	--	
Insulation Resistance	Input - ⊕	Environment temperature: 25±5℃,	100	--	--	MΩ
	Input-output	Relative humidity: <95%RH, non-condensing	100	--	--	
	Output - ⊕	Testing voltage: 500VDC	100	--	--	
Operating Temperature			-40	--	+70	℃
Storage Temperature			-40	--	+85	
Storage Humidity			10	--	95	%RH
Operating Humidity			20	--	90	
Power Derating	Operating temperature derating	+50℃ to +70℃	2.5	--	--	% / ℃
		-40℃ to +50℃	0	--	--	
	Input voltage derating	90VAC - 100VAC	1.0	--	--	% / VAC
		100VAC - 264VAC	0	--	--	
Safety Standard			Design refer to IEC/EN/UL/BS EN62368-1, IEC60950-1, ES60601-1, EN/BS EN60335-1 & EN61558-1, IEC61558-1, GB4943.1, IEC/EN60601-1, CAN/CSA-C22.2 No.60601-1:14-Edition 3, EN60601-1-2 Edition 4			
Safety Class			CLASS I (with PE and must be connected)/CLASS II (without PE)			
Isolation level	Input-output		2 x MOPP			
	Input - ⊕		1 x MOPP			
	Output - ⊕		1 x MOPP			
MTBF		MIL-HDBK-217F@25℃	>300,000 h			

Mechanical Specifications

Case Material	Metal (AL5052+SUS304)
Dimensions	130.0mm x 86.0mm x 35.0 mm
Weight	430g (Typ.)
Cooling Method*	Free air convection (180W/200W) / 20.5CFM (300W/325W/350W)

Notes: *Please refer to the product characteristic curve for cooling method and power derating.

Electromagnetic Compatibility (EMC)*

EMI*	CE	CISPR32/EN55032	CLASS B		
	RE	CISPR32/EN55032	CLASS B (Category I, CLASS B; Category II, CLASS A)		
	Harmonic Current	IEC/EN61000-3-2	CLASS A and CLASS D		
	Flicker	IEC/EN61000-3-3			
EMS*	ESD	IEC/EN 61000-4-2	Contact ±8KV/Air ±15KV	perf. Criteria A	
	RS	IEC/EN 61000-4-3	10V/m	perf. Criteria A	
	EFT	IEC/EN 61000-4-4	±4KV	perf. Criteria A	

Surge	IEC/EN 61000-4-5 ±2KV/±4KV	perf. Criteria A
CS	IEC/EN61000-4-6 10 Vr.m.s	perf. Criteria A
DIP	IEC/EN61000-4-11 0%, 70%	perf. Criteria B

Notes: 1.*The power supply is considered a component as part of system, all EMC items are tested on a metal plate (L x W x H, 360mm x 360mm x 1mm). Power supply should be combined with final equipment for EMC confirmation;

2.*Category I products with PE, which must be connected, category II products without PE.

3.*perf. Criteria:


A: The equipment shall continue to operate as intended without operator intervention;

B: After the test, the equipment shall continue to operate as intended without operator intervention;


C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.

Product Characteristic Curve


LOF350-20B12-C (full load 300W with Forced Air)

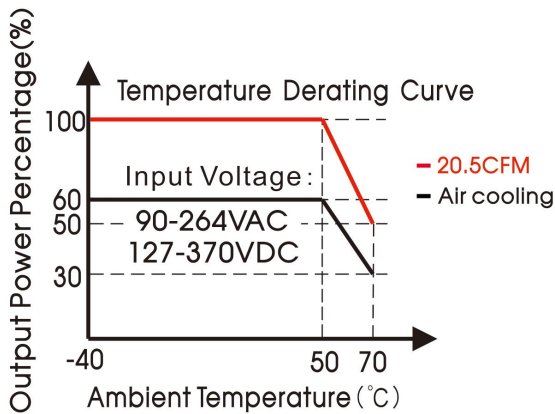


LOF350-20B15/18/19-C (full load 325W with Forced Air)

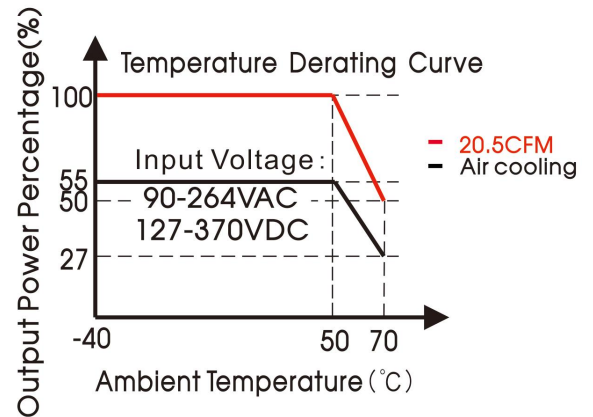

LOF350-20B24/36/48/54-C (full load 350W with Forced Air)


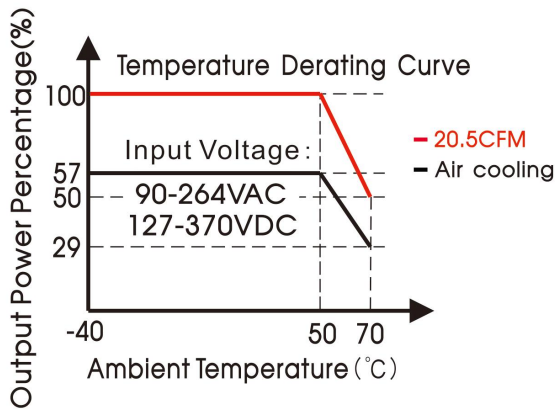


LOF350-20Bxx-C Input Voltage Derating Curve

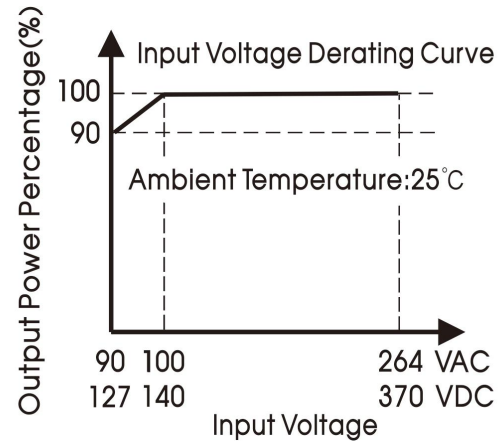


Note: 1. With an AC input voltage between 90 - 100VAC and a DC input between 127 - 140VDC the output power must be derated as per the temperature derating curves.

2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

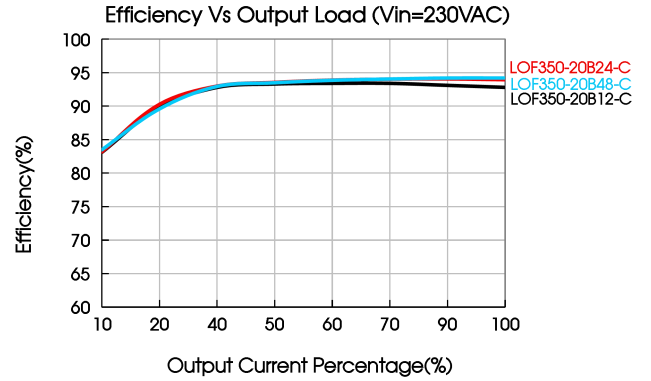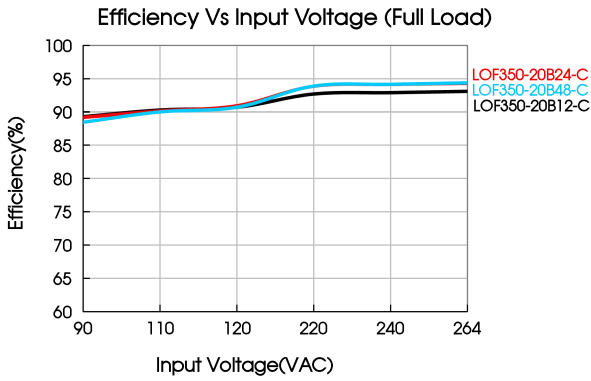


Dimensions and Recommended Layout

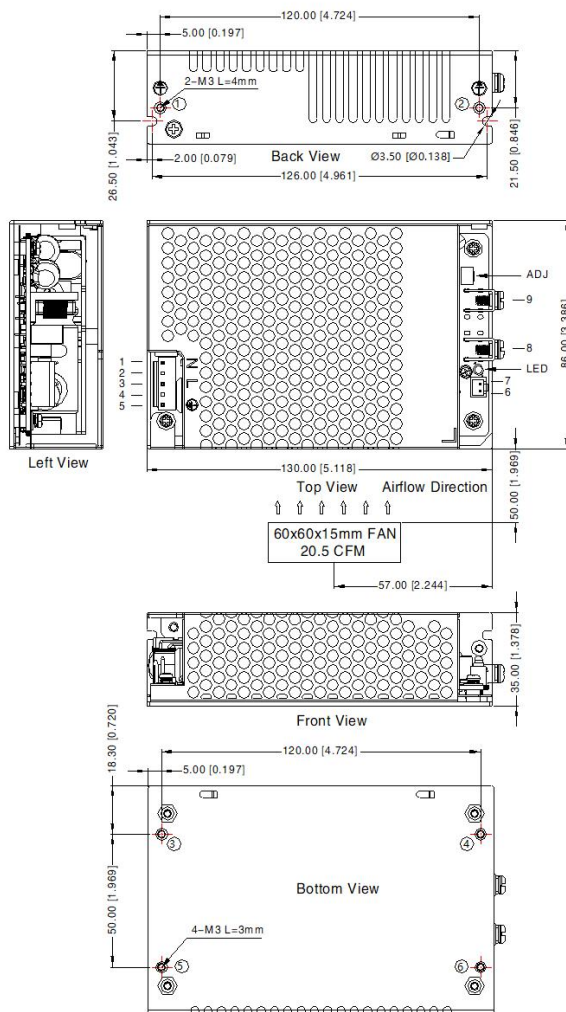

Pin-Out			
Pin	Mark	Product Connector	Customer Connector
1	AC(N)/DC-	JST B5P-VH or equivalent	Housing: JST VHR Contact: JST SVH-21T-P1.1 or PJA-018(Mornsun Accessory)
2	NC		
3	AC(L)/DC+		
4	NC	KANGDAO 2.5XHS-2A or equivalent	Housing: KANGDAO 2.5XHS-2Y Contact: KANGDAO 2.5XH-TE or PJA-008(Mornsun Accessory)
6	FAN-		
7	FAN+		
8	-Vo		
9	+Vo		
	ADJ	Output adjustable resistor	

Position	Screw Spec.	L(max)	Torque(max)
①-②	M3	4mm	0.4N·m
③-⑥	M3	3mm	0.4N·m



- Note:
- Unit: mm[inch]
 - ADJ: Output adjustable resistor
 - General tolerances: $\pm 1.00[\pm 0.039]$
 - Connector tightening torque: M3.5, 0.8N·m
 - Wire range: 18-14AWG
 - The layout of the device is for reference only, please refer to the actual product

Note: The PJA-XXX series is the accessories of products, quotation is available.

Note:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220154;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
3. The ambient temperature derating of 5°C/1000m is needed for operating altitude greater than 2000m;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. In order to improve the efficiency at light load, there will be audible noise generated, but it does not affect product performance and reliability;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. The out case needs to be connected to PE (⊕) of system when the terminal equipment in operating;
9. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
10. Warning: Use double fuses, please disconnect the power before maintenance and replacement;
11. The power supply is considered a component which will be installed into a final equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No.8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com