

SiC driver power supply



RoHS



FEATURES

- Reinforced insulation
- I/O isolation test voltage: 5.0kVAC
- Partial Discharge 1700V
- Characterised CMTI>200kV/μs
- Max. Capacitive Load: 2200μF
- Ultra-low isolation capacitance: 3.5pF (typ.)
- High efficiency up to 87%
- SIP package
- Operating ambient temperature range: -40°C to +105°C
- Continuous short-circuit protection

QAxx3C-R3S is DC-DC module power supply designed for SiC driver requiring two sets of isolation power supply. The mode of common ground outputs is adopted internally for better energy provision of SiC turn-on and turn-off. Output short-circuit protection and self-recovery capabilities are also provided. General application includes:

1. Universal converter
2. AC servo drive system
3. Electric welding machine
4. Uninterruptible power supply (UPS)

Selection Guide

Certification	Part No.	Input		Output		Full Load Efficiency (%) Typ.	Max. Capacitive Load(μF)
		Voltage(VDC) (Range)	Current(mA, Typ.) Full Load/No Load	Voltage (VDC) +Vo/-Vo	Current (mA) +Io/-Io		
--	QA053C-1505R3S	5 (4.5-5.5)	348/31	+15/-5	+80/-40	77/81	1000
	QA053C-2004R3S	5 (4.5-5.5)	426/32	+20/-4	+80/-40		470
	QA053C-1803R3S	5 (4.5-5.5)	415/36	+18/-3.5	+80/-80		680
	QA123C-1504R3S	12 (10.8-13.2)	214/12	+15/-4	+120/-120	82/87	1500
	QA153C-1504R3S	15 (13.5-16.5)	170/11				2200
	QA243C-1504R3S	24 (21.6-26.4)	119/12			77/82	2200
--	QA123C-2005R3S	12 (10.8-13.2)	216/17	+20/-5	+90/-90	82/87	470
	QA153C-2005R3S	15 (13.5-16.5)	171/15				2200
	QA243C-2005R3S	24 (21.6-26.4)	117/16			76/81	2200
	QA123C-1803R3S	12 (10.8-13.2)	211/17	+18/-3	+100/-100	80/85	1000
	QA153C-1803R3S	15 (13.5-16.5)	167/14				1500
	QA243C-1803R3S	24 (21.6-26.4)	112/14			73/78	2200

Note:*The specified maximum capacitive load for positive and negative output is identical.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage (1sec. max.)	Vin=5VDC	DC	-0.7	--	9	VDC
	Vin=12VDC	DC	-0.7	--	18	
	Vin=15VDC	DC	-0.7	--	21	

	Vin=24VDC	DC	-0.7	--	30	
Input Filter			Capacitance Filter			
Hot Plug			Unavailable			

Output Specifications

Item			Operating Conditions		Min.	Typ.	Max.	Unit
	QA053C-1505R3S	+Vo	Vin=5VDC, Pin6 & Pin7 +Io= +80mA		14.48	15.23	15.98	
		-Vo	Vin=5VDC, Pin5 & Pin6 -Io= -40mA		-4.43	-4.68	-4.93	
	QA053C-2004R3S	+Vo	Vin=5VDC, Pin6 & Pin7 +Io= +80mA		18.80	19.80	20.80	
		-Vo	Vin=5VDC, Pin5 & Pin6 -Io= -40mA		-3.78	-3.98	-4.18	
	QA053C-1803R3S	+Vo	Vin=5VDC, Pin6 & Pin7 +Io= +80mA		16.74	17.64	18.54	
		-Vo	Vin=5VDC, Pin5 & Pin6 -Io= -80mA		-3.12	-3.29	-3.47	
	QA123C-1504R3S	+Vo	Vin=12VDC, Pin6 & Pin7 +Io= +120mA		13.80	14.55	15.30	
		-Vo	Vin=12VDC, Pin5 & Pin6 -Io= -120mA		-3.42	-3.62	-3.82	
	QA123C-2005R3S	+Vo	Vin=12VDC, Pin6 & Pin7 +Io= +90mA		18.40	19.40	20.40	
		-Vo	Vin=12VDC, Pin5 & Pin6 -Io= -90mA		-4.75	-5.00	-5.25	
	QA153C-1504R3S	+Vo	Vin=15VDC, Pin6 & Pin7 +Io= +120mA		13.58	14.33	15.08	
		-Vo	Vin=15VDC, Pin5 & Pin6 -Io= -120mA		-3.74	-3.94	-4.14	
	QA153C-2005R3S	+Vo	Vin=15VDC, Pin6 & Pin7 +Io= +90mA		18.30	19.30	20.30	
		-Vo	Vin=15VDC, Pin5 & Pin6 -Io= -90mA		-4.73	-4.98	-5.23	
	QA243C-1504R3S	+Vo	Vin=24VDC, Pin6 & Pin7 +Io= +120mA		14.18	14.93	15.68	
		-Vo	Vin=24VDC, Pin5 & Pin6 -Io= -120mA		-3.74	-3.94	-4.14	
	QA243C-2005R3S	+Vo	Vin=24VDC, Pin6 & Pin7 +Io= +90mA		18.80	19.80	20.80	
		-Vo	Vin=24VDC, Pin5 & Pin6 -Io= -90mA		-4.60	-4.85	-5.10	
	QA123C-1803R3S	+Vo	Vin=12VDC, Pin6 & Pin7 +Io= +100mA		17.19	18.09	18.99	
		-Vo	Vin=12VDC, Pin5 & Pin6 -Io= -100mA		-2.87	-3.02	-3.17	
QA153C-1803R3S	+Vo	Vin=15VDC, Pin6 & Pin7 +Io= +100mA		17.01	17.91	18.81		
	-Vo	Vin=15VDC, Pin5 & Pin6 -Io= -100mA		-2.70	-2.85	-3.00		
QA243C-1803R3S	+Vo	Vin=24VDC, Pin6 & Pin7 +Io= +100mA		17.01	17.91	18.81		
	-Vo	Vin=24VDC, Pin5 & Pin6 -Io= -100mA		-2.84	-2.99	-3.14		
Voltage Accuracy			10% - 100% load		See output regulation curve (Fig. 3 to26)			
Linear Regulation	5V Input model	Full voltage input range	+Vo Output	--	±1.1	±1.4	--	
			-Vo Output	--	±1.1	±1.4		
	Other model		+Vo Output	--	±1.1	±1.5		
			-Vo Output	--	±1.1	±1.5		
Load Regulation	5V Input model	10% - 100% load	+Vo Output	--	8	15	%	
			-Vo Output	--	10	15		
	QA053C-1803R3S QA123C-1803R3S		+Vo Output	--	10	17		
			-Vo Output	--	12	17		
	QA123C-1504R3S QA153C-1504R3S		+Vo Output	--	14	20		
			-Vo Output	--	16	20		
	Other model		+Vo Output	--	6	15		
			-Vo Output	--	8	15		
Temperature Coefficient			Full load		--	±0.04	±0.1	%/°C
Ripple & Noise*	5V Input model	20MHz bandwidth			--	50	150	mVp-p
	Other model				--	50	100	

Short-circuit Protection

Continuous, self-recovery

Note: * The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output, Test for 1 minute with a leakage current of 1mA max	5000	--	--	VAC
Partial Discharge	Input- output (According to IEC61800-5-1). leakage charge< 10 pC	1700	--	--	V
CMTI	Input- output	±200	--	--	kV/μs
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	MΩ
Isolation capacitor	Input- output, capacitor at 100kHz/0.1V	5V Input model	5	6.5	pF
		Other model	3.5	5	
Operating Temperature	Derating when operating temperature ≥85℃, (see Fig. 1, 2)	-40	--	105	℃
Storage Temperature		-55	--	125	
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10s seconds	--	--	300	
Case Temperature Rise	Ta=25℃, nominal input voltage, full load	--	30	60	
Storage Humidity	Non-condensing	5	--	95	%RH
Switching Frequency	Full load, nominal input voltage	--	200	--	kHz
Safety Standard	See Selection Guide	--			
Safety Class		CLASS III			
MTBF	MIL-HDBK-217F@25℃	3500	--	--	k hours

Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant
Dimensions	19.50 x 9.80 x 12.50mm
Weight	4.3g(Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	5V Input model	CISPR32/EN55032	CLASS B (see Fig. 34 for recommended circuit)
		Other Input model	CISPR32/EN55032	CLASS A (see Fig. 34 for recommended circuit)
	RE	5V Input model	CISPR32/EN55032	CLASS A (see Fig. 34 for recommended circuit)
		Other Input model	CISPR32/EN55032	CLASS B (see Fig. 35 for recommended circuit)
Immunity	ESD	5V Input model	IEC/EN61000-4-2	Contact ±6kV perf. Criteria B
		Other Input model	IEC/EN61000-4-2	Contact ±8kV perf. Criteria B

Typical Characteristic Curves

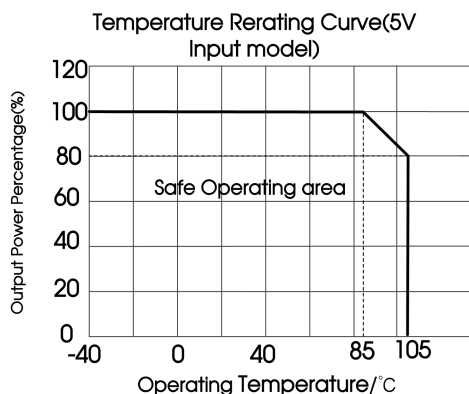


Fig. 1

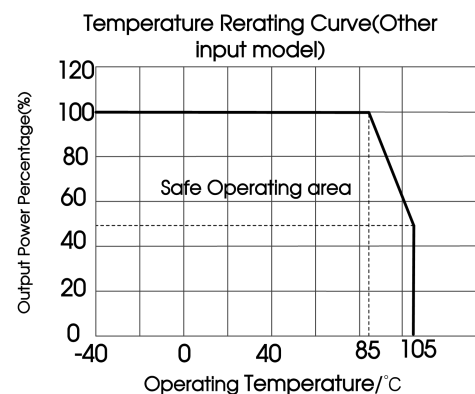


Fig. 2

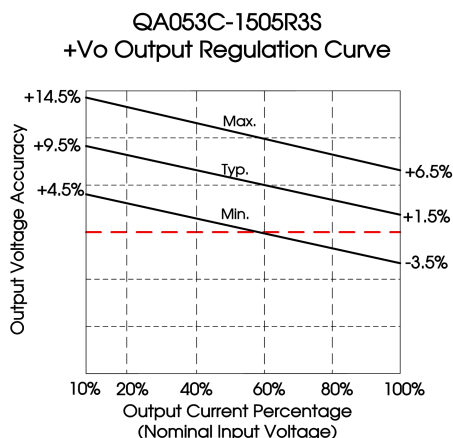


Fig. 3

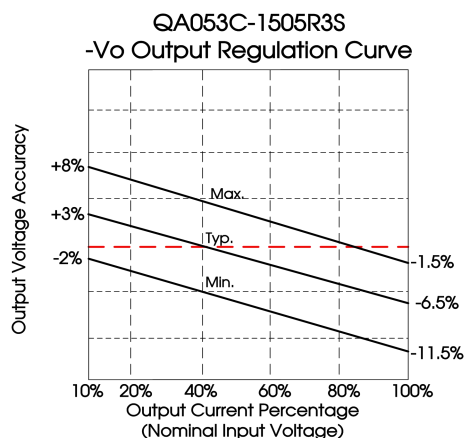


Fig. 4

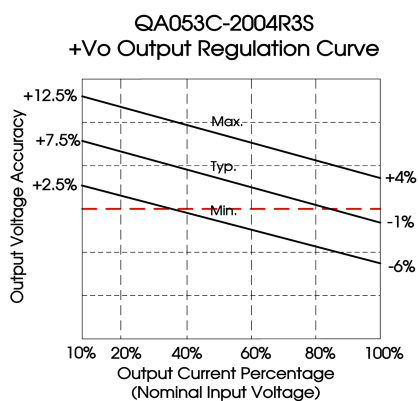


Fig. 5

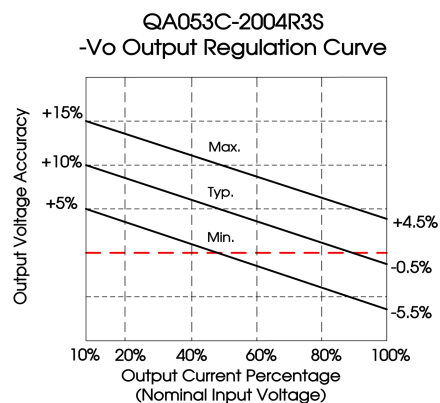


Fig. 6

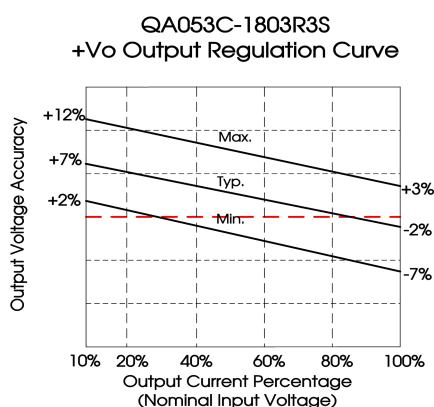


Fig. 7

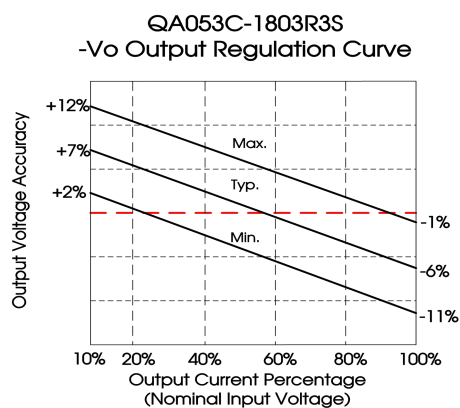


Fig. 8

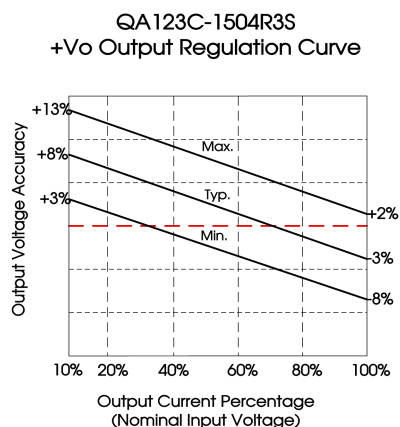


Fig. 9

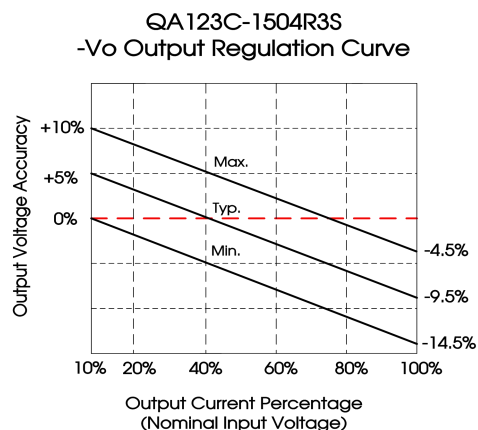


Fig. 10

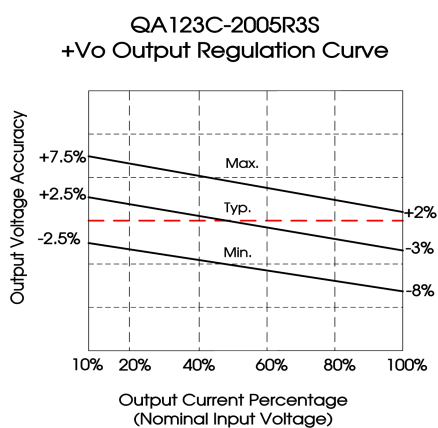


Fig. 11

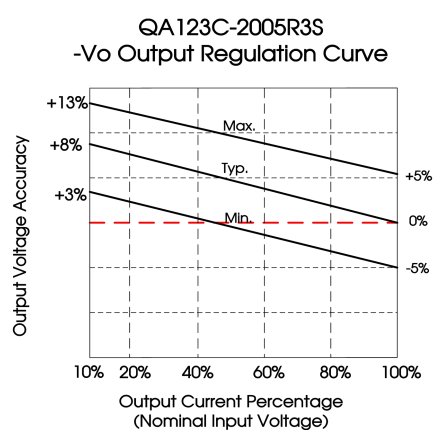


Fig. 12

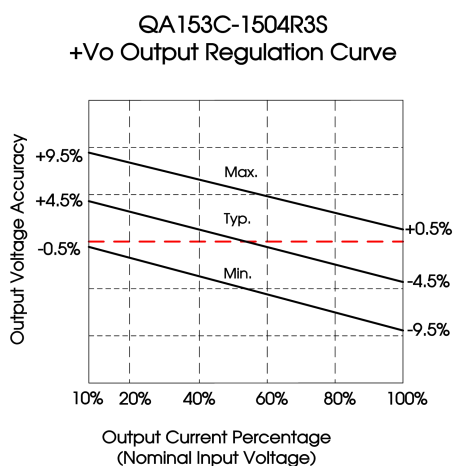


Fig. 13

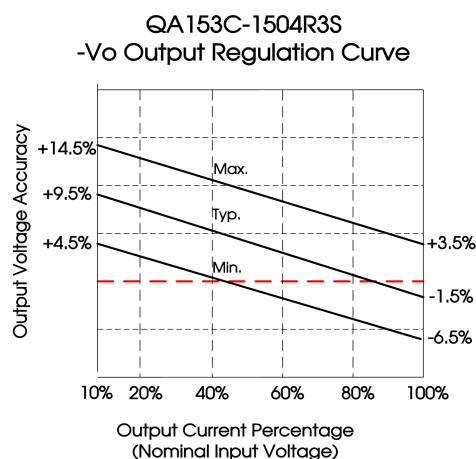


Fig. 14

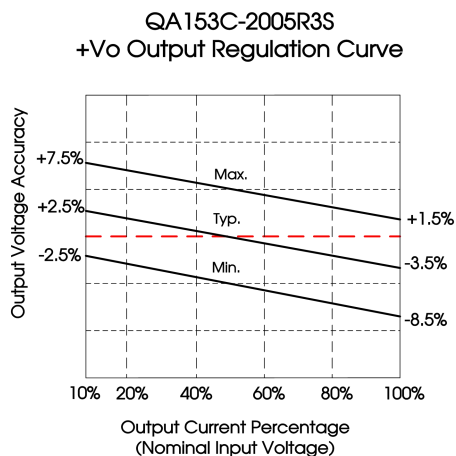


Fig. 15

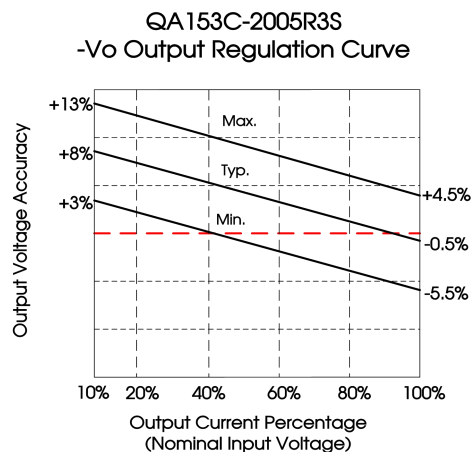


Fig. 16

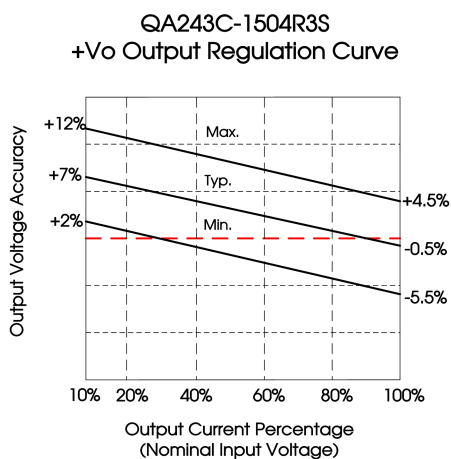


Fig. 17

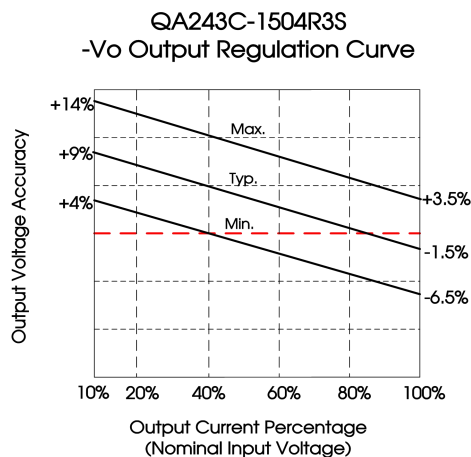


Fig. 18

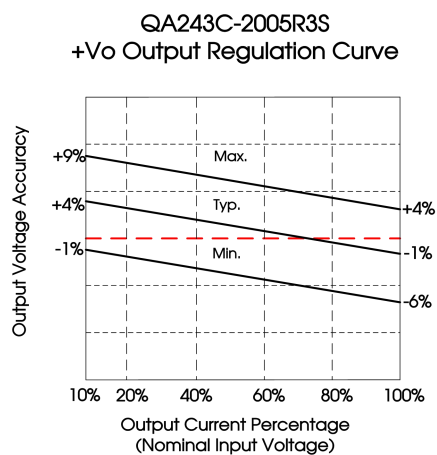


Fig. 19

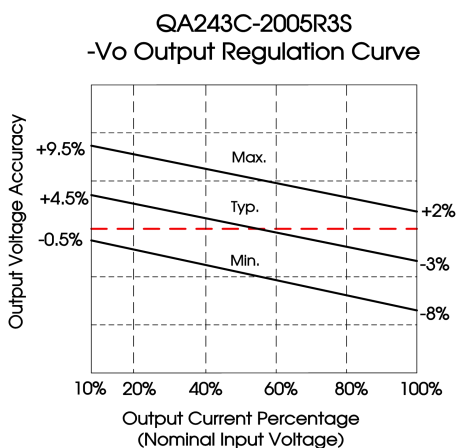


Fig. 20

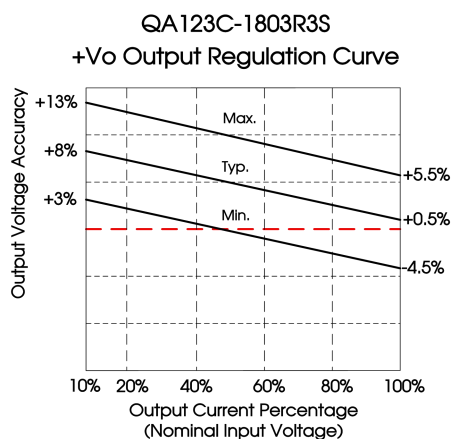


Fig. 21

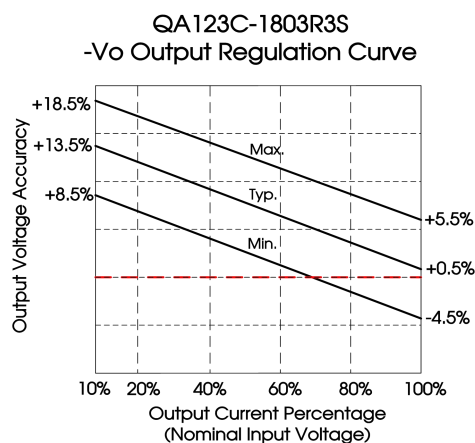


Fig. 22

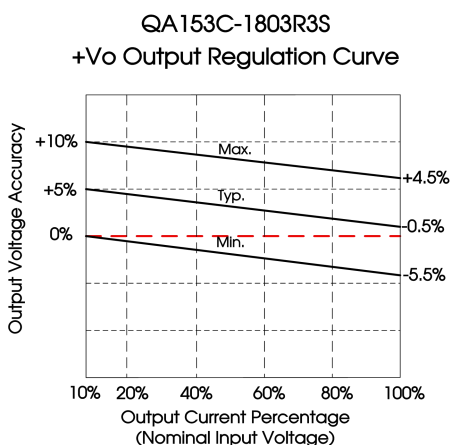


Fig. 23

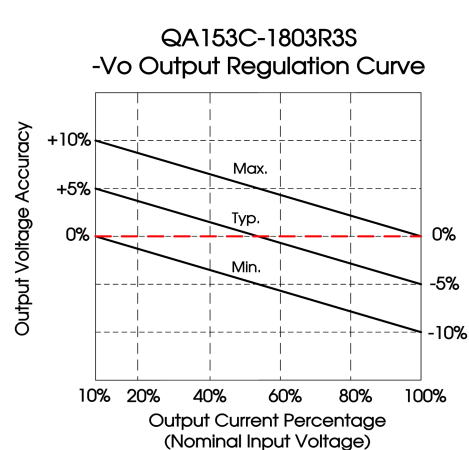


Fig. 24

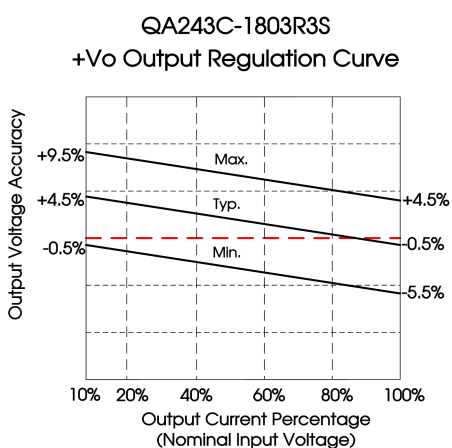


Fig. 25

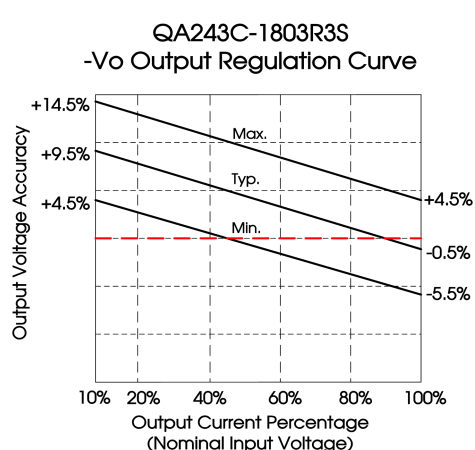


Fig. 26

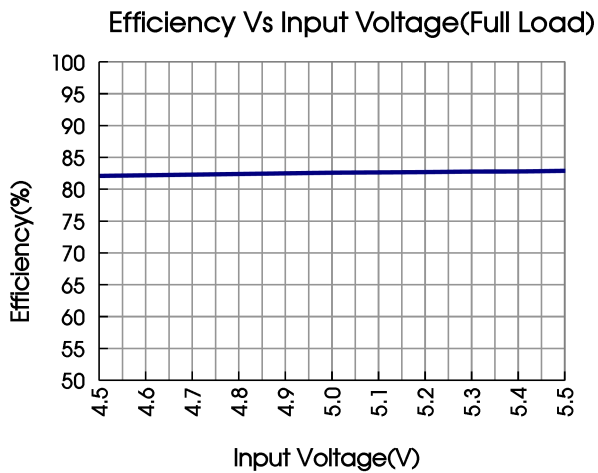


Fig. 27

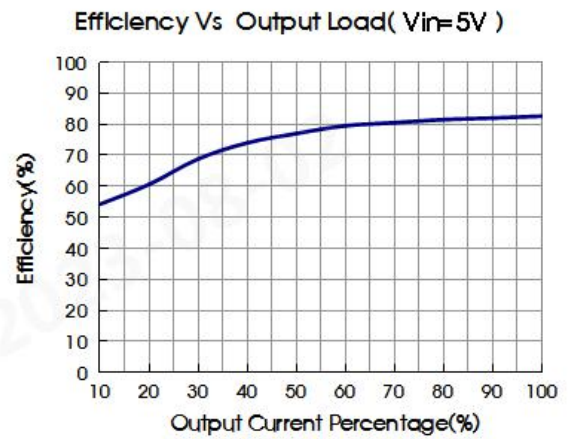


Fig. 28

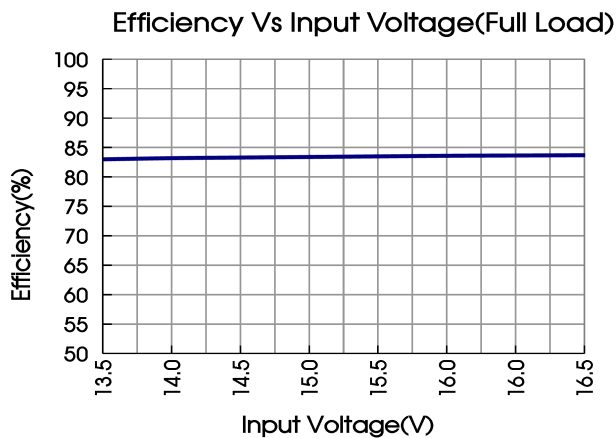


Fig. 29

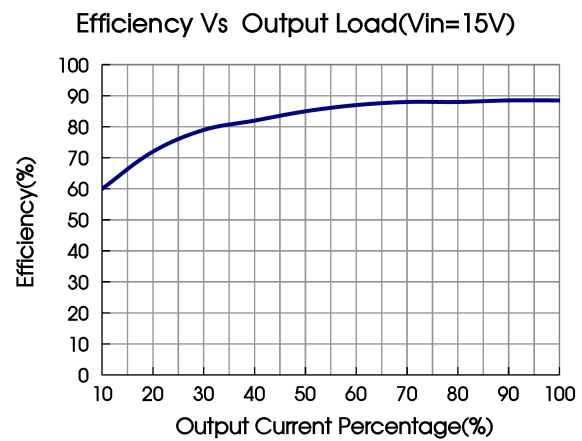


Fig. 30

Note: Take QA053C-1505R3S and QA153C-2005R3S as an example, other models can be corresponding reference

Design Reference

1. Test configurations

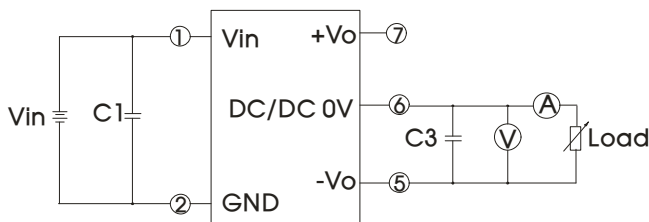


Fig. 31

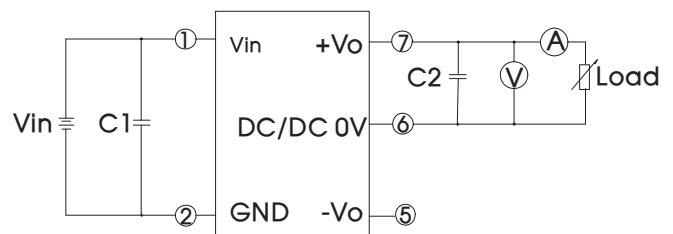


Fig. 32

Note: C1, C2, C3: 100μF/35V(Low internal resistance)

2. Typical application

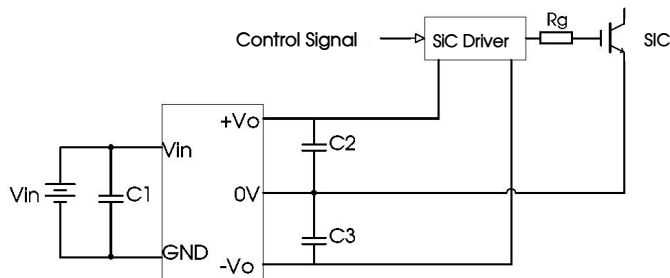


Fig. 33

C1/C2/C3
100μF/35V(Low resistance)

3. EMC typical recommended circuit

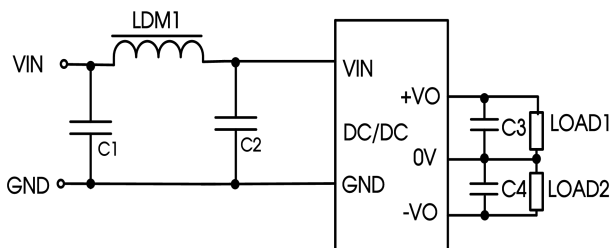


Fig. 34

Device selection			
Project		5V Input model	Other Input model
EMI	C1/C2	4.7μF /16V	1μF/50V
	C3/C4	10μF /50V (Low resistance)	100μF/30V (Low resistance)
	LDM	6.8μH	33μH

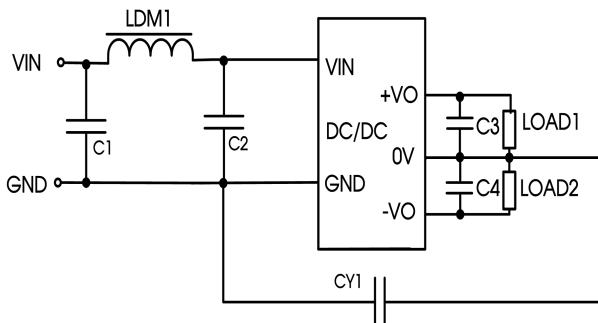


Fig. 35

Device selection			
EMI	C1/C2	4.7μF /16V	
	C3/C4	10μF /50V (Low resistance)	
	LDM	6.8μH	
	CY1	330pF	


4. Electrolytic capacitors are recommended for external capacitors at the input or output of the product. Tantalum capacitors are not, otherwise there is a risk of failure.

5. The products do not support parallel connection of their output for power expansion purpose or hot-plug.


6. For more information please find the application notes on www.mornsun-power.com

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

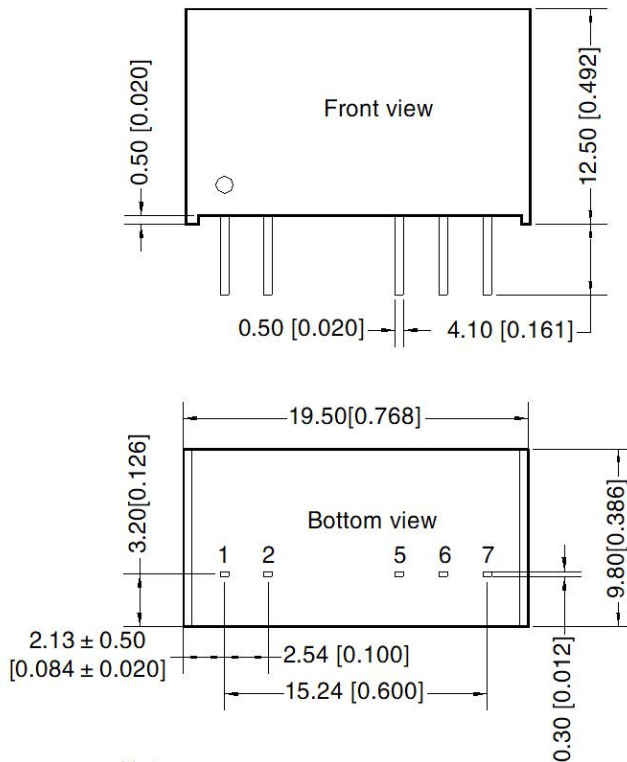

Note:
Unit: mm[inch]
Pin section tolerances: $\pm 0.10 [\pm 0.004]$
General tolerances: $\pm 0.50 [\pm 0.020]$

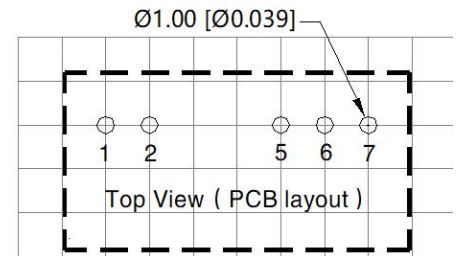

Note: Grid 2.54*2.54mm

Pin-Out	
Pin	Mark
1	Vin
2	GND
5	-Vo
6	0V
7	+Vo

Notes:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58200013;
- The lead connecting the power supply module and SiC driver should be as short as possible during use;
- The output filtering capacitor should be as close as possible to the power supply module and SiC driver;
- The peak of the SiC driver gate drive current is high, so low internal resistance electrolytic capacitor is recommended to be used for the power supply module output filter capacitor;
- The average output power of the driver must be lower than that of the power supply module;
- Consider fixing with glue near the module if being used in vibration occasion;
- The maximum capacitive load offered were tested at nominal input voltage and full load;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on company corporate standards;
- The above are the performance indicators of the product models listed in this datasheet. Some indicators of non-standard models will exceed the above requirements. For details, please contact our technical staff;
- Products are related to laws and regulations: see "Features" and "EMC".
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units
- We can provide product customization service, please contact our technicians directly for specific information.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com