


IGBT driver power supply



patent protection

RoHS

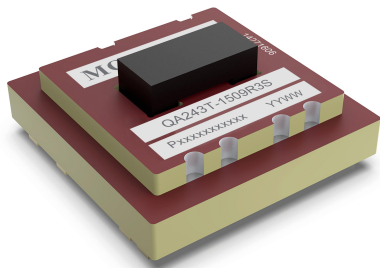

FEATURES

- Reinforced insulation
- Ultra-low isolation capacitance: 2.5pF( typ.)
- I/O isolation test voltage: 5.0kVAC
- Partial Discharge 2.5kV
- CMTI>200 kV/μs
- Max. Capacitive Load: 2200μF
- High efficiency up to 86%
- Operating ambient temperature range: -40℃ to +105℃
- Continuous short-circuit protection
- SMD package
- Power 2.4W
- MSL 1
- AEC-Q100 experiment

The QAxx3T-R3S series is a DC-DC module power supply designed for IGBT drives, which uses asymmetric voltage output to minimize the drive loss of IGBT. At the same time with output short circuit protection and self-recovery ability. The product is suitable for:

- 1.General frequency converter
- 2.AC servo drive system
- 3.Arc welder
- 4.Uninterruptible power supply (UPS)

Selection Guide							
Certification	Part No.	Inport		Output		Full load efficiency(%) Min./Typ.	Max.Capa citive Load(μF)
		input voltage(VDC) (Range)	input currenton (mA,Typ.) Full / No load	Voltage(VDC) +Vo/-Vo	Current (mA) +Io/-Io		
--	QA123T-1509R3S	12 (10.8-13.2)	240/9	+15.0/-9.0	+100/-100	80/86	1000
	QA153T-1509R3S	15 (13.5-16.5)	180/8	+15.0/-9.0	+100/-100	80/86	2200
	QA243T-1509R3S	24 (21.6-26.4)	120/7	+15.0/-9.0	+100/-100	77/81	2200

Note: \* The output capacitive load per channel is the same.

Limiting Character						
Project	Operating Conditions		Min.	Typ.	Max.	Unit
Reflux welding temperature	--		The peak temperature Tc 245℃, the time above 217℃ is maximum 60s, Refer to the IPC / JEDEC J-STD-020D.1 standard for practical application.			

Input Specifications						
Item		Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage (1sec. max.)	Vin=12VDC	DC	-0.7	--	18	VDC
	Vin=15VDC	DC	-0.7	--	21	
	Vin=24VDC	DC	-0.7	--	30	
Input the filter type			Capacitor filtering			
Hot plug			Unavailable			

### Output Specifications

Item			Operating Conditions	Min.	Typ.	Max.	Unit
Output voltage	QA123T-1509R3S	+Vo	Vin=12VDC, Pin9 & Pin10 +Io= +100mA	14.10	14.85	15.60	VDC
		-Vo	Vin=12VDC, Pin8 & Pin9 -Io= -100mA	-8.10	-8.55	-9.00	
	QA153T-1509R3S	+Vo	Vin=15VDC, Pin9 & Pin10 +Io= +100mA	14.25	15.00	15.75	
		-Vo	Vin=15VDC, Pin8 & Pin9 -Io= -100mA	-8.10	-8.55	-9.00	
	QA243T-1509R3S	+Vo	Vin=24VDC, Pin9 & Pin10 +Io= +100mA	13.65	14.40	15.15	
		-Vo	Vin=24VDC, Pin8 & Pin9 -Io= -100mA	-8.28	-8.73	-9.18	
Voltage Accuracy			10% -100% of load	See output regulation curve (Figure 2-Figure 7)			%
Linear Regulation		+Vo	Full voltage input range	--	±1.1	±1.3	--
		-Vo		--	±1.1	±1.3	
Load Regulation	QA123T-1509R3S	+Vo	10% - 100% load	--	9	12	%
		-Vo		--	9	12	
	QA153T-1509R3S	+Vo		--	7	12	
		-Vo		--	8	12	
	QA243T-1509R3S	+Vo		--	5	10	
		-Vo		--	5	10	
Temperature Coefficient			Full load	--	±0.04	±0.1	%/°C
Ripple & Noise*			20MHz bandwidth	--	50	--	mVp-p
Short-circuit Protection			Continuous, self-recovery				
Note:* The “parallel cable” method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.							

Note:\* The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

### General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output, Test for 1 minute with a leakage current of 1mA max	5000	--	--	VAC
Continuous barrier withstand voltage	Input- output	--	2500	--	V
CMTI	Input- output	±200	--	--	kV/μs
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	MΩ
Isolation capacitor	Input- output, capacitor at 100kHz/0.1V	--	2.5	4	pF
Operating Temperature	Derating when operating temperature ≥85°C, (see Fig. 1)	-40	--	105	°C
Storage Temperature		-55	--	125	
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10s seconds	--	--	300	
Case Temperature Rise	Ta=25°C, nominal input voltage, full load	--	30	60	
Storage Humidity	Non-condensing	5	--	95	%RH
Switching Frequency	Full load, nominal input voltage	--	200	--	kHz
Safety Standard		--			
Safety Class		CLASS III			
MTBF	MIL-HDBK-217F@25°C	3500	15604	--	k hours

### Mechanical Specifications

Dimensions	23.11*22.61*9.85mm
Weight	6.6g (Typ.)
Cooling Method	Natural air cold

## Electromagnetic Compatibility (EMC)

Emissions	CE (12V/15V Series)	CISPR32/EN55032	CLASS B (see Table 2. for recommended circuit)
	CE (24V Series)	CISPR32/EN55032	CLASS A (see Table 2. for recommended circuit)
	RE	CISPR32/EN55032	CLASS A (see Table 2. for recommended circuit)
Immunity	ESD	IEC/EN61000-4-2	Contact $\pm 8\text{kV}$ perf. Criteria B

## Typical Characteristic Curves

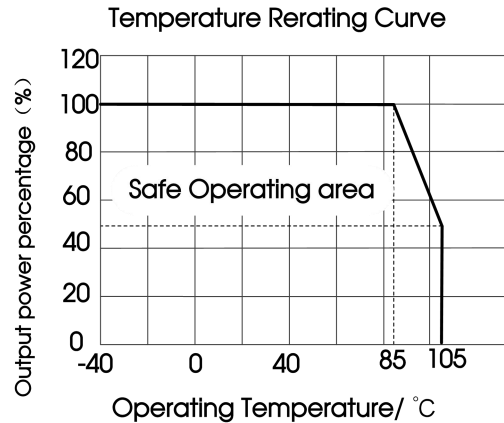


Fig.1

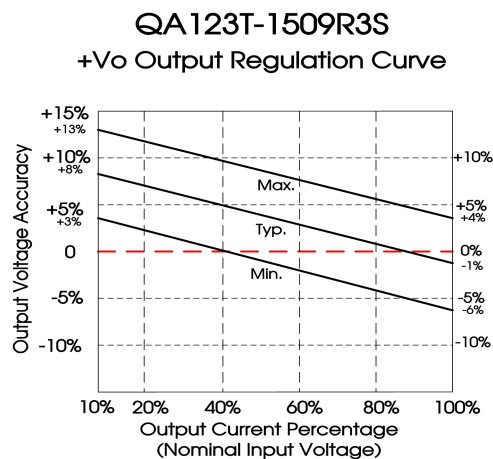


Fig.2

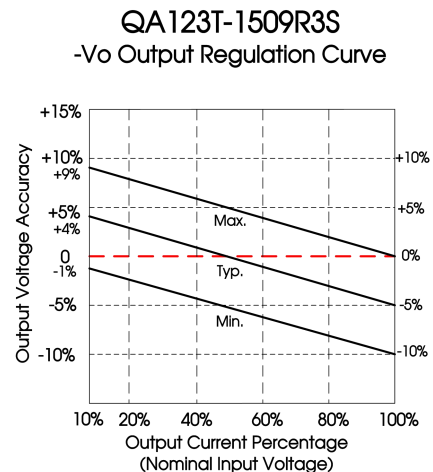


Fig.3

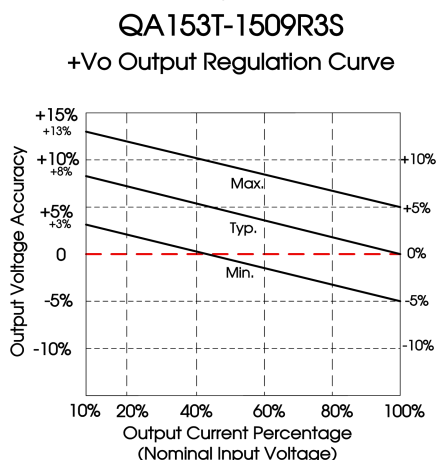


Fig.4

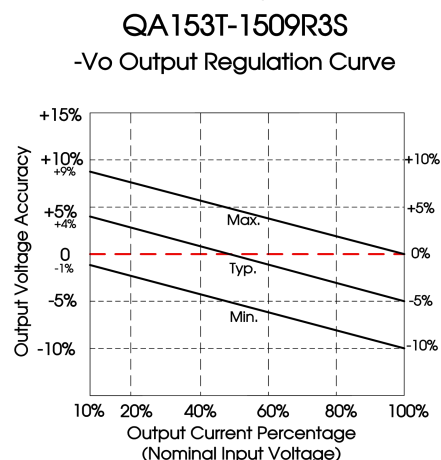


Fig.5

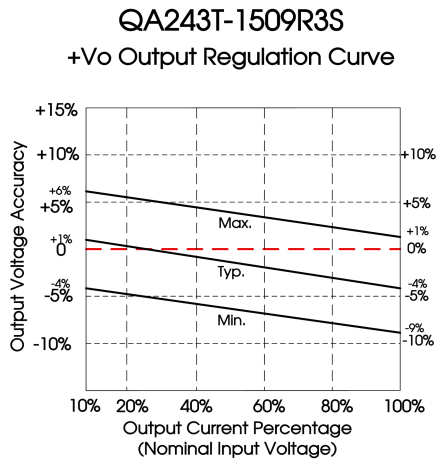


Fig.6

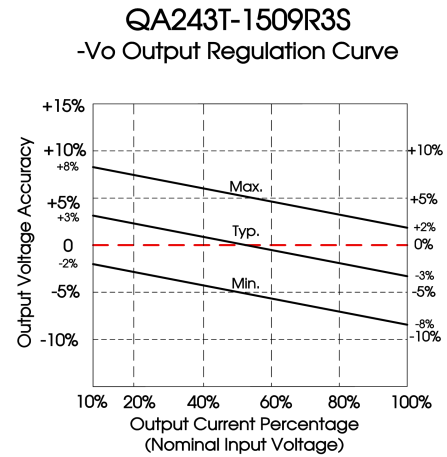


Fig.7

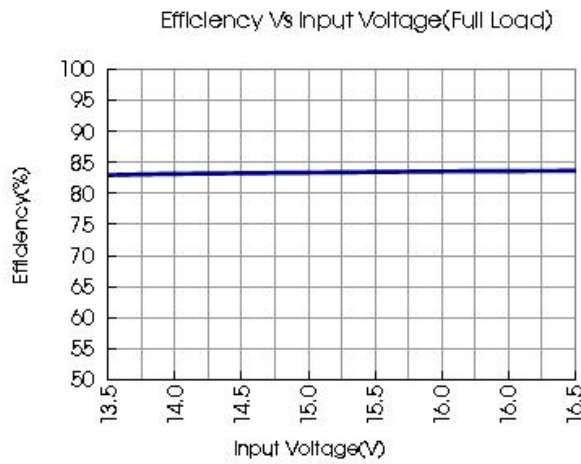


Fig.8

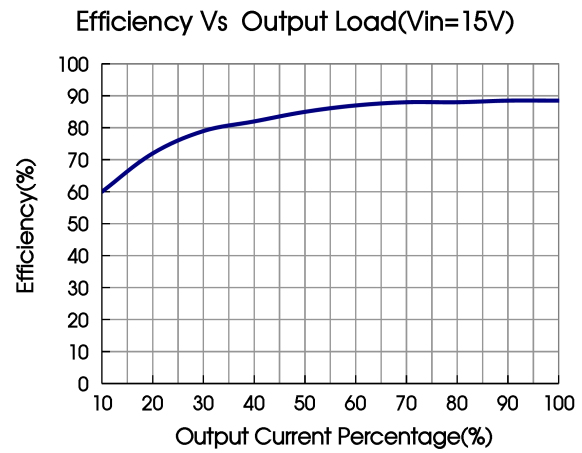


Fig.9

Note: Take QA153T-1509R3S as an example, other models can be corresponding reference

## Design Reference

### 1. Test configurations

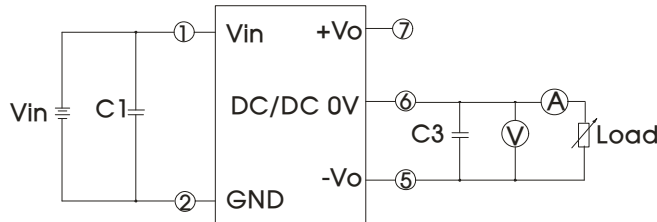


Fig.10

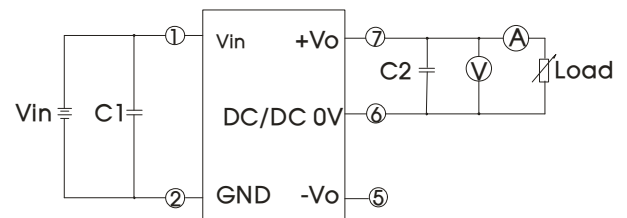


Fig.11

Note: C1, C2, and C3, respectively, are 100  $\mu$ F / 35V (low internal resistance capacitance)

## 2. Typical applications

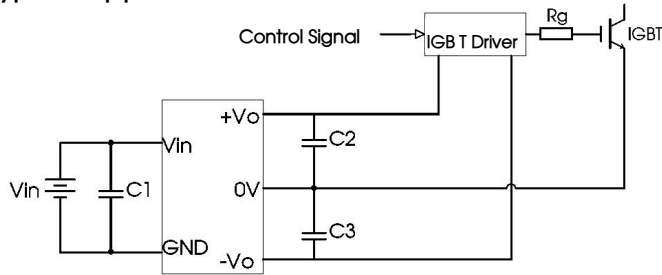


Fig.12

Table 1.

C1/C2/C3
100 $\mu$ F / 35V (low internal resistance capacitor)

### 3. EMC typical recommended circuit

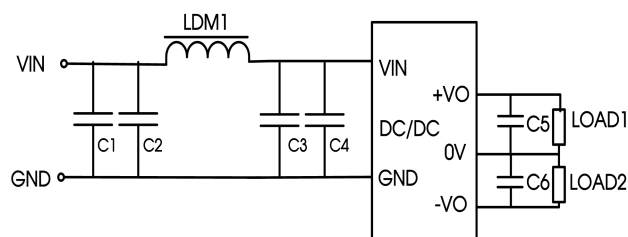


Fig.13

Table 2.


Part No.	Recommended circuit	C1	C2	C3	C4	LDM1
QA123T-1509R3S	Fig.13	1μF/50V	0.1μF/50V	1μF/50V	0.1μF/50V	27μH
QA153T-1509R3S						
QA243T-1509R3S	Fig.13	4.7μF/50V	0.1μF/50V	4.7μF/50V	0.1μF/50V	33μH

4. Electrolytic capacitors are recommended for external capacitors at the input or output of the product. Tantalum capacitors are not, otherwise there is a risk of failure.


5. The products do not support parallel connection of their output for power expansion purpose or hot-plug.

6. For more information please find the application notes on [www.mornsun-power.com](http://www.mornsun-power.com)

Dimensions and Recommended Layout

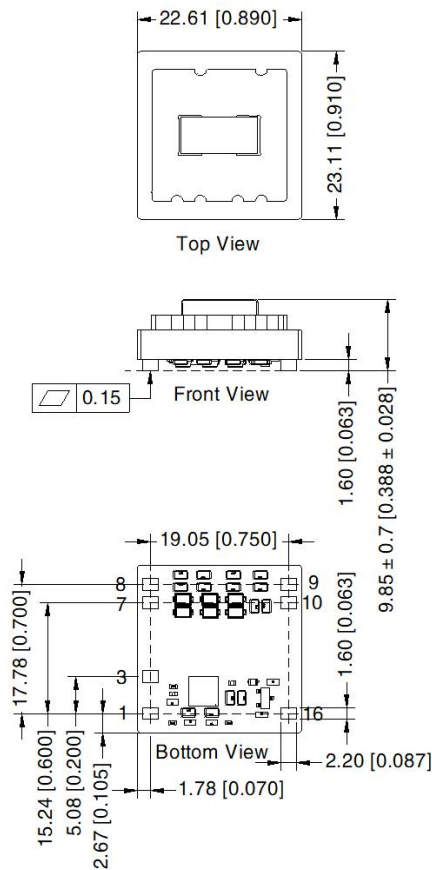

THIRD ANGLE PROJECTION




Note: Grid 2.54\*2.54mm

Pin-Out	QAXX3T-1509R3S
Pin	Mark
1	GND
3	NC
7	NC
8	-V0
9	0V
10	+V0
16	VCC

Note:  
Unit: mm[inch]  
Pin size tolerances:  $\pm 0.10 [\pm 0.004]$   
General tolerances:  $\pm 0.50 [\pm 0.020]$   
The layout of the device is for reference only,  
please refer to the actual product



Package diagram:

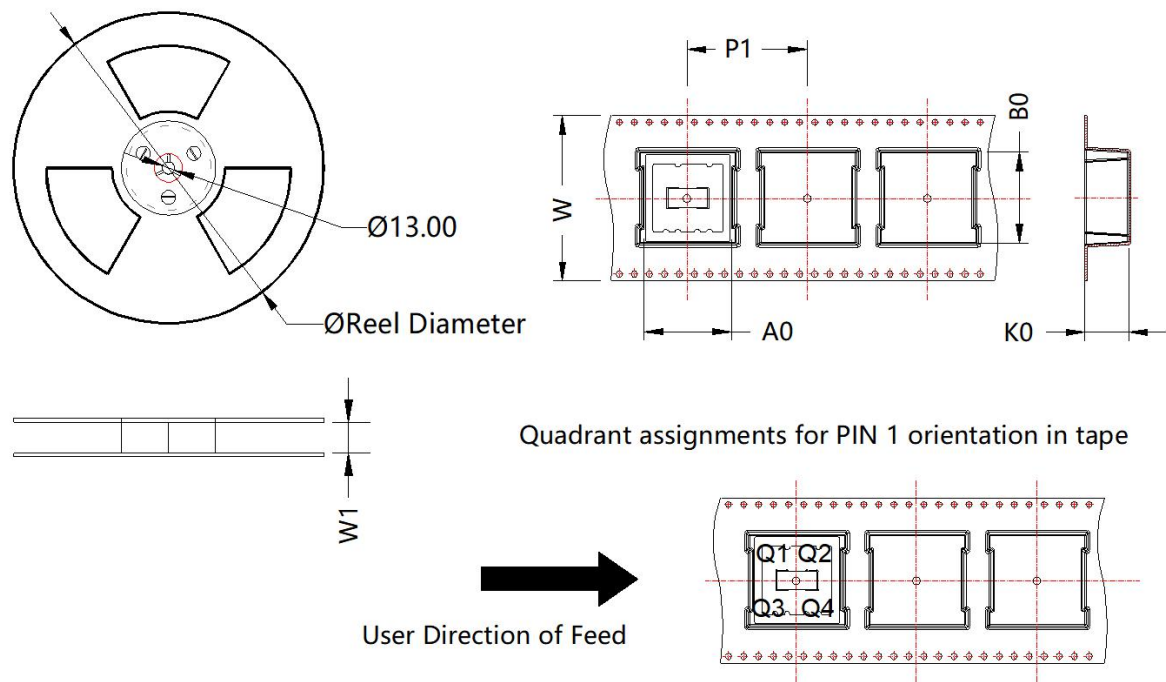

Device	MPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
QAx3T-xxxxR3S	170	180.0	44.5	23.78	24.28	11.6	32.0	44.0	Q1

- Notes:
1. For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58070018;
  2. The leads for the module and SIC drives are as short as possible;
  3. The output filtering capacitor should be as close as possible to the power supply module and IGBT driver;
  4. The peak of the IGBT driver gate drive current is high, so low internal resistance electrolytic capacitor is recommended to be used for the power supply module output filter capacitor;
  5. The average output power of the driver must be lower than that of the power supply module;
  6. Consider fixing with glue near the module if being used in vibration occasion;
  7. The maximum capacitive load offered were tested at nominal input voltage and full load;
  8. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25℃, humidity<75%RH with nominal input voltage and rated output load;
  9. All index testing methods in this datasheet are based on company corporate standards;
  10. he above are the performance indicators of the product models listed in this datasheet. Some indicators of non-standard models will exceed the above requirements. For details, please contact our technical staff;
  11. Products are related to laws and regulations: see "Features" and "EMC".
  12. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.
  13. We can provide product customization service, please contact our technicians directly for specific information;

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China  
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: [info@mornsun.cn](mailto:info@mornsun.cn) [www.mornsun-power.com](http://www.mornsun-power.com)