


DC-DC module power supply specialized for SiC driver



RoHS



UL62368-1



EN62368-1

FEATURES

- High efficiency up to 87%
- SIP package
- I/O isolation test voltage: 5000VAC(reinforced insulation)
- Max. Capacitive Load: 2200μF
- Ultra-low isolation capacitance
- Operating ambient temperature range: -40°C to +105°C
- Continuous short-circuit protection
- Industry standard pin-out

QAxxxHC-R3 is DC-DC module power supply designed for SiC driver requiring two sets of isolation power supply. The mode of common ground outputs is adopted internally for better energy provision of SiC turn-on and turn-off. Output short-circuit protection and self-recovery capabilities are also provided. General application includes:

1. Universal converter
2. AC servo drive system
3. Electric welding machine
4. Uninterruptible power supply (UPS)

Selection Guide

Certification	Part No.	Input		Output		Full Load Efficiency (%) Typ.	Max. Capacitive Load(μF)
		Voltage(VDC) (Range)	Current(mA, Typ.) Full Load/No Load	Voltage (VDC) +Vo1/+Vo2	Current (mA) +Io1/+Io2		
UL/EN	QA123HC-1504R3	12 (10.8-13.2)	215/8	+15.0/-4.0	+120/-120	82/87	2200
	QA153HC-1504R3	15 (13.5-16.5)	171/8				2200
	QA243HC-1504R3	24 (21.6-26.4)	131/10			77/82	2200
	QA123HC-2005R3	12 (10.8-13.2)	213/14	+20.0/-5.0	+90/-90	82/87	470
	QA153HC-2005R3	15 (13.5-16.5)	167/8				2200
	QA243HC-2005R3	24 (21.6-26.4)	129/11			76/81	2200

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit	
Input Voltage (1sec. max.)	Vin=12VDC	DC	-0.7	--	18	VDC	
	Vin=15VDC	DC	-0.7	--	21		
	Vin=24VDC	DC	-0.7	--	30		
Input Filter	Capacitance Filter						
Hot Plug	Unavailable						

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage	QA123HC-1504R3	+Vo	Vin=12VDC, Pin10 & Pin9 +Io= +120mA	14.25	15.00	15.75
		-Vo	Vin=12VDC, Pin9 & Pin8 -Io= -120mA	-3.60	-3.80	-4.00
	QA153HC-1504R3	+Vo	Vin=15VDC, Pin10 & Pin9 +Io= +120mA	13.80	14.55	15.30

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

	-Vo	Vin=15VDC, Pin9 & Pin8 -Io= -120mA	-3.80	-4.00	-4.20	
QA243HC-1504R3	+Vo	Vin=24VDC, Pin10 & Pin9 +Io= +120mA	14.55	15.30	16.05	
	-Vo	Vin=24VDC, Pin9 & Pin8 -Io= -120mA	-3.96	-4.16	-4.36	
	+Vo	Vin=12VDC, Pin10 & Pin9 +Io= +90mA	18.60	19.60	20.60	
QA123HC-2005R3	-Vo	Vin=12VDC, Pin9 & Pin8 -Io= -90mA	-4.95	-5.20	-5.45	
	+Vo	Vin=15VDC, Pin10 & Pin9 +Io= +90mA	18.40	19.40	20.40	
	-Vo	Vin=15VDC, Pin9 & Pin8 -Io= -90mA	-4.85	-5.10	-5.35	
QA153HC-2005R3	+Vo	Vin=24VDC, Pin10 & Pin9 +Io= +90mA	19.00	20.00	21.00	
	-Vo	Vin=24VDC, Pin9 & Pin8 -Io= -90mA	-4.75	-5.00	-5.25	
Voltage Accuracy		10% - 100% load		See output regulation curve (Fig. 2)		%
Linear Regulation	Full voltage input range	+Vo Output	--	±1.1	±1.5	
		-Vo Output	--	±1.1	±1.5	--
Load Regulation	10% - 100% load	+Vo Output	--	8	15	
		-Vo Output	--	8	15	%
Temperature Coefficient	Full load		--	±0.04	±0.1	%/°C
Ripple & Noise*	20MHz bandwidth		--	50	100	mVp-p
Short-circuit Protection				Continuous, self-recovery		

Note: * The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output, Test for 1 minute with a leakage current of 1mA max(reinforced insulation)	5000	--	--	VAC
Continuous insulation voltage (IEC61800-5-1)	Input- output	1700	--	--	V
Insulation Resistance	Input- output resistance at 500VDC	1000	--	--	MΩ
Isolation capacitor	Input- output capacitor at 100kHz/0.1V	--	3.5	5	pF
Electrical clearance	Input- output	14.14	14.74	--	mm
Creepage distance	Input- output	14.14	14.74	--	mm
CMTI	Input- output	±200	--	--	kV/us
Operating Temperature	Derating when operating temperature $\geq 85^{\circ}\text{C}$, (see Fig. 1)	-40	--	105	
Storage Temperature		-55	--	125	
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	300	
Case Temperature Rise	Ta=25°C, nominal input voltage, full load	--	--	40	
Storage Humidity	Non-condensing	5	--	95	%RH
Switching Frequency	Full load, nominal input voltage	--	200	--	kHz
Safety Standard		UL62368-1 & EN62368-1 (Report)			
Safety Class		CLASS III			
MTBF	MIL-HDBK-217F@25°C	3500	--	--	k hours

Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant
Dimensions	27.40 x 9.50 x 12.00mm
Weight	5.3 g (Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS A (see Fig.7 for recommended circuit)
	RE	CISPR32/EN55032	CLASS A (see Fig.7 for recommended circuit)
Immunity	ESD	IEC/EN61000-4-2	Contact ±8kV perf. Criteria B

Typical Characteristic Curves

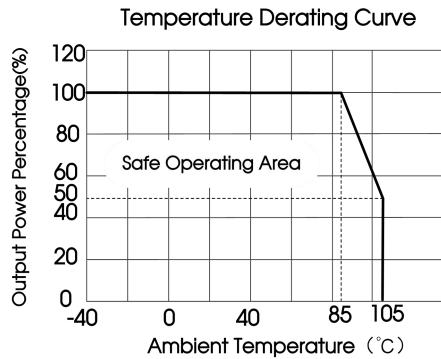
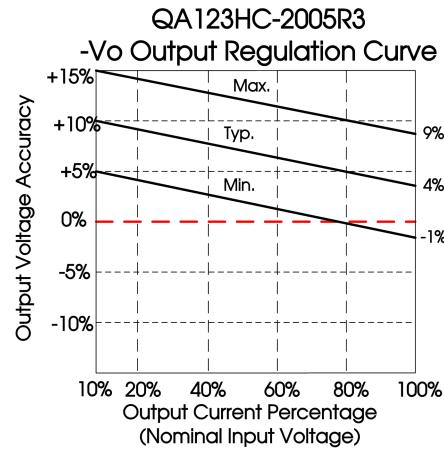
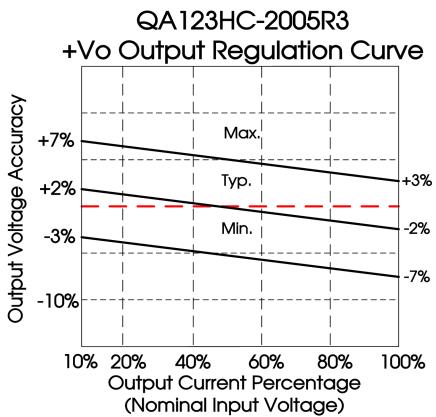
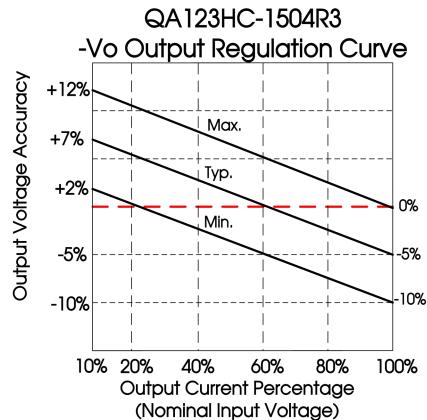
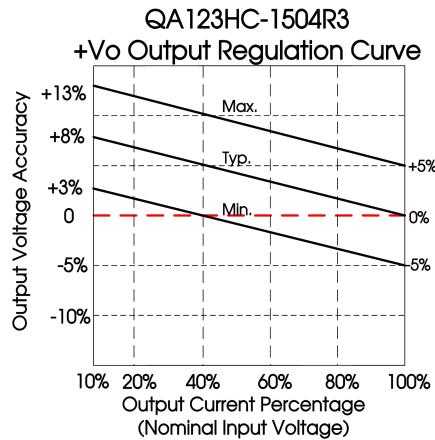


Fig. 1



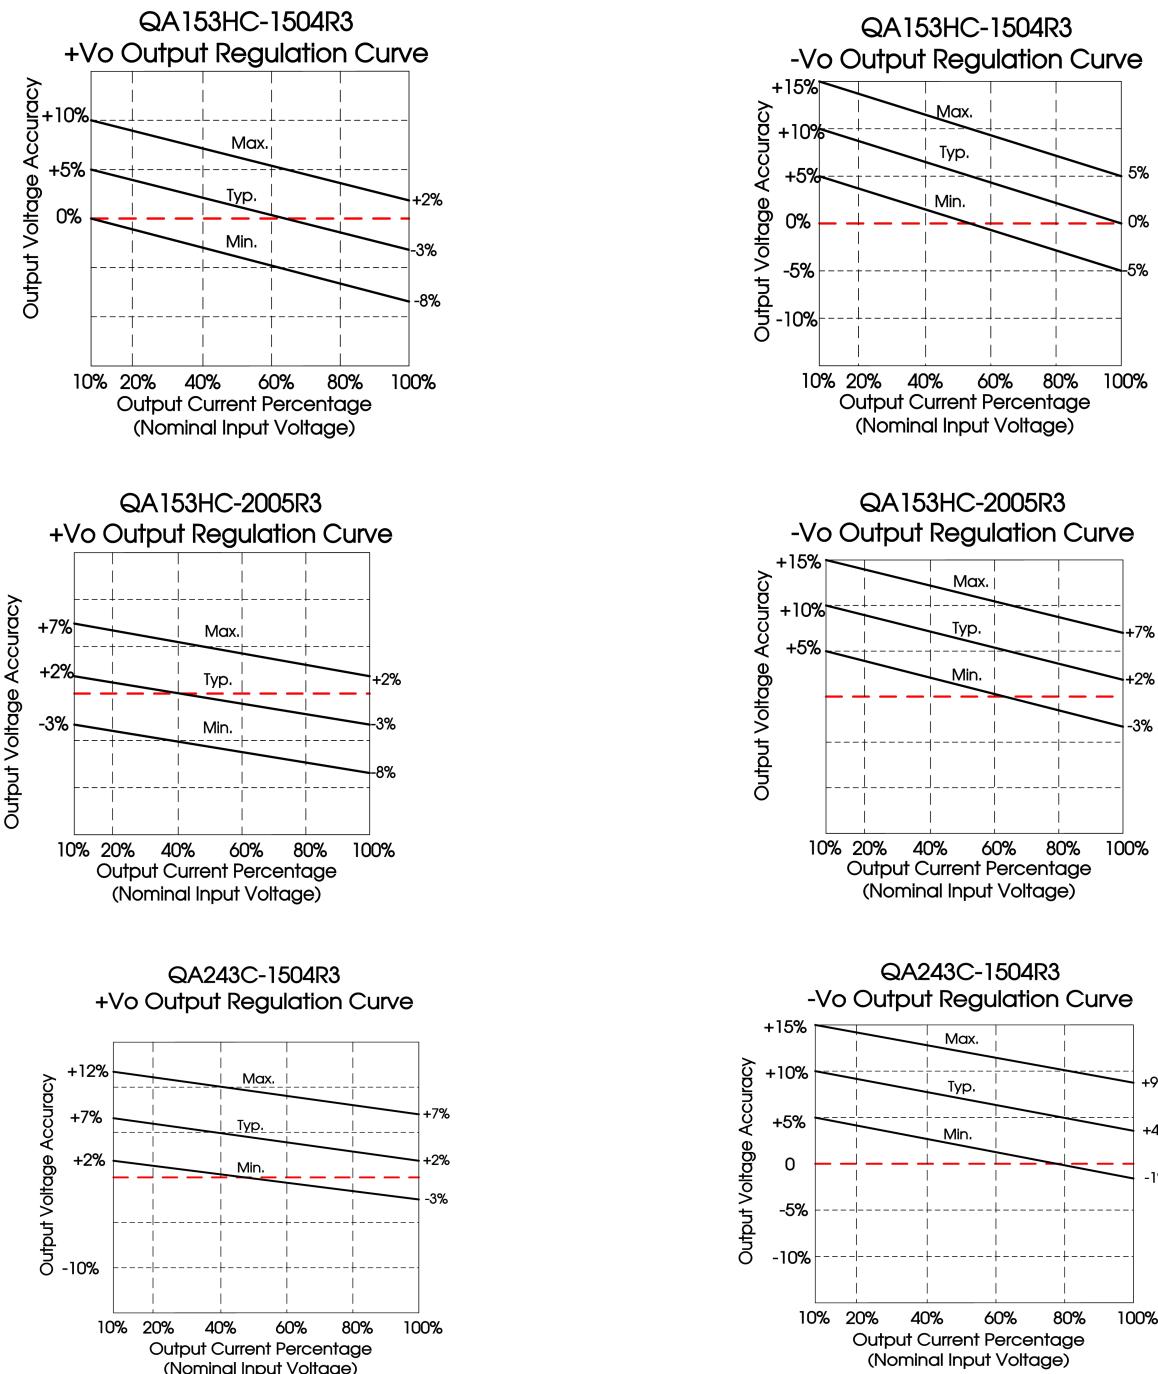


Fig. 2


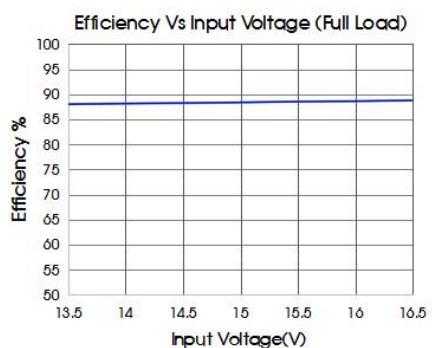


Fig. 3

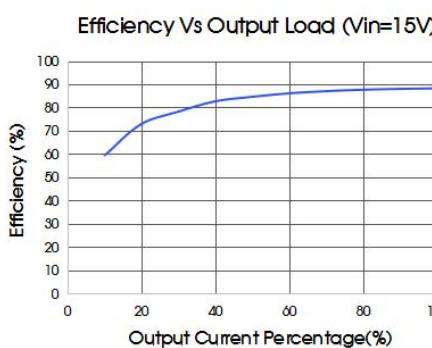

Note: Take QA153HC-2005R3 as an example, other models can be corresponding reference

Design Reference

1. Over-load Protection

There is no over-load protection under normal operating conditions, we suggest to add an circuit breaker outside in the circuit.

2. Test configurations

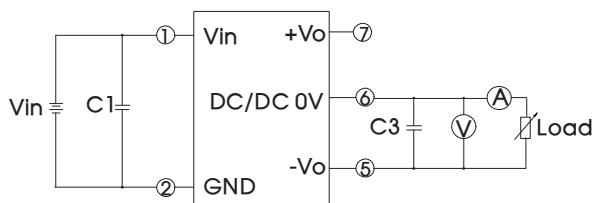


Fig. 4

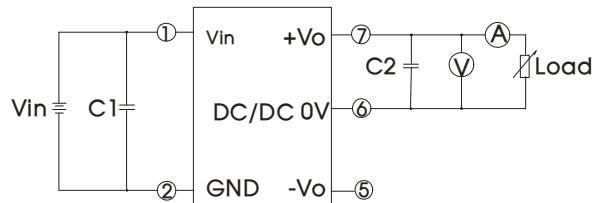


Fig. 5

Note: C1, C2, C3: 100μF/35V

3. Typical application

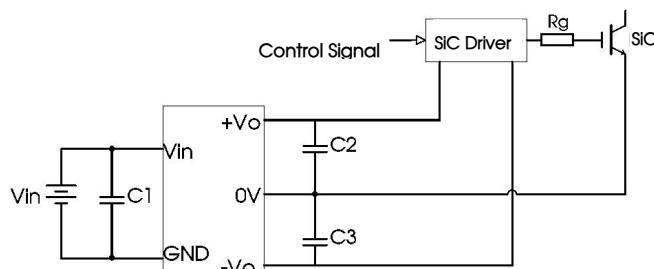


Fig. 6

C1/C2/C3
100μF/35V

4. EMC typical recommended circuit

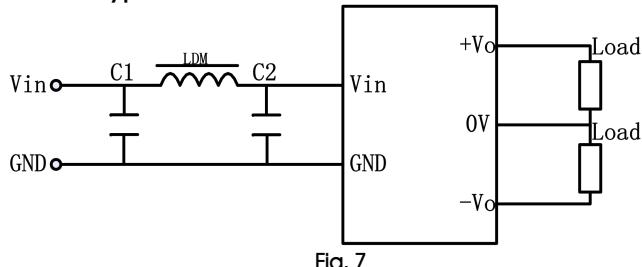


Fig. 7


LDM	33uH
C1/ C2	1.0μF/35V(Low internal resistance)

5. Electrolytic capacitors are recommended for external capacitors at the input or output of the product. Tantalum capacitors are not, otherwise there is a risk of failure.

6. The products do not support parallel connection of their output for power expansion purpose or hot-plug.

7. For more information please find the application notes on www.mornsun-power.com

Dimensions and Recommended Layout

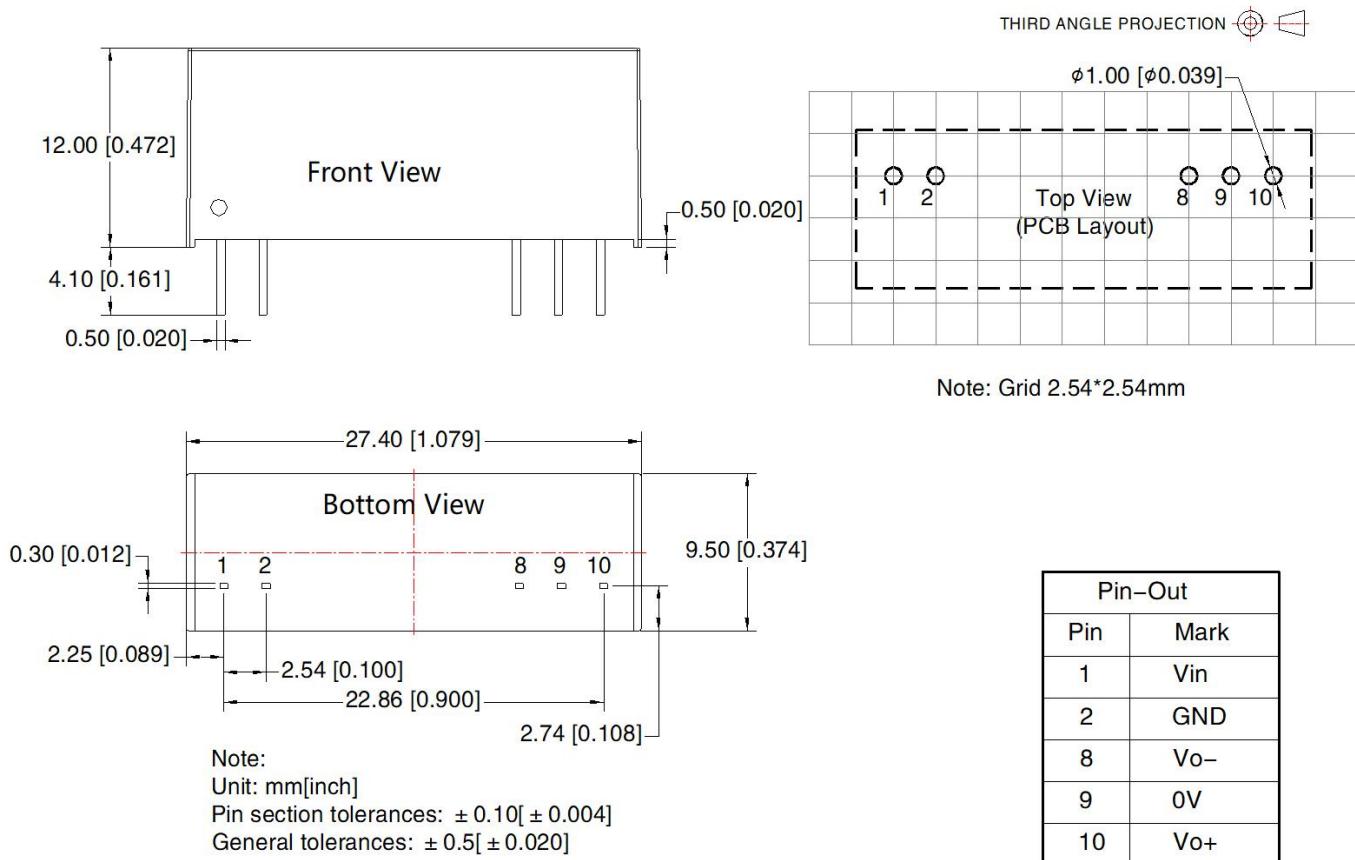

Notes:

1. For additional information on Product Packaging please refer to www.mornsun-power.com, Packaging bag number: 58200015;
2. The lead wire connecting the power module and IGBT driver (or SiC MOSFET driver) should be as short as possible when in use;
3. The output filter capacitor is as close as possible to the power module and IGBT driver (or SiC MOSFET driver);
4. IGBT driver (or SiC MOSFET driver) gate drive current has a high peak value.
5. It is recommended that the output filter capacitor of the power module use a low internal resistance electrolytic capacitor;
6. The average output power of the driver must be lower than that of the power supply module;
7. Consider fixing with glue near the module if being used in vibration occasion;
8. The maximum capacitive load offered were tested at nominal input voltage and full load;
9. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
10. All index testing methods in this datasheet are based on company corporate standards;
11. We can provide product customization service, please contact our technicians directly for specific information;
12. Products are related to laws and regulations: see "Features" and "EMC";
13. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com