

EV Charger Residual Current Transducer
TLB6-A1PCE



RoHS



Features

- Open-loop, fluxgate-based current transducer
- Meet IEC 62752: 2018 (IC-CPD)
- Meet IEC 62955: 2018 (RDC-PD)
- Meet the requirements of AC 30mA and DC 6mA residual current detection
- Lead in wire, easy for using
- 5,000 A surge current capability

TLB6-A1PCE is a residual current transducer for EV charger. It can be widely used in the electric vehicle charger industry. It uses fluxgate detection technology to detect DC, AC, and various pulsating residual currents. The module meets the residual current requirements of IEC62752 (mode 2) and IEC62955 (mode 3) testing standards. It can detect residual current waveform covering Type B, and can detect 6mA DC residual current. The trigger is sensitive and responds to leakage events in time.

Selection Guide

Part No.	Input Voltage (VDC)	Rated DC Residual Current (mA)	Rated AC Residual Current (mA)	Rated current (A)	Maximum Power Dissipation(W)
TLB6-A1PCE	5	6	30	80A/ 40A (1 phase/ 3 phase)	0.2

Electrical Characteristics

Item	Symbol	Min	Typ	Max	Unit.
Rated Residual DC Operating Current	$I_{\Delta NDC}$	--	6	--	mA
Rated Residual AC Operating Current	$I_{\Delta NAC}$	--	30	--	mA
Range of Remaining DC Operating Current	$I_{\Delta NDC-RANGE}$	3	4.5	6	mA
Range of Remaining AC Operating Current	$I_{\Delta NAC-RANGE}$	15	22.5	30	mA
Input Voltage	V_{CC}	4.85	5	5.15	V
Operating Current	--	--	30	40	mA

Protection and Detection Characteristics

Item	Symbol	Min	Typ	Max	Unit.
Self Check Input Low Level Voltage	$V_{TEST-IN IL}$	0	--	1	V
Self Check Input High Level Voltage	$V_{TEST-IN IH}$	4	--	5.1	V
Calibration Input Low Voltage	V_{CAL-IL}	0	--	1	V
Calibration Input High Voltage	V_{CAL-IH}	4	--	5.1	V
Operating Output Low Level Voltage	$V_{TRIP-OL}$	0	--	0.6	V
Operating Output High Level Voltage	$V_{TRIP-OH}$	4.5	--	VCC	V

Isolation Characteristics

Item	Operating Conditions	Min	Typ	Max	Unit.
Isolation Test	Primary edge input, secondary output; 50Hz, 1min; leakage current < 1mA	--	4	--	kVAC
Impulse withstand voltage	1.2/50us	--	7	--	kV

General Characteristics

Item	Symbol	Min	Typ	Max	Unit.
Operating Temperature	Ta	-40	--	+85	°C
Storage Temperature	T _s	-40	--	+125	°C
Weight	m	18	22	26	g
Vibration	20-150Hz, 5g (GB2423.10, IEC60068-2-6)				
Overvoltage Category	OVC III (IEC61010)				


Performance Characteristic

Item	Symbol	Residual Current Waveform	Min	Typ	Max	Unit.
Residual operating current	I _{ΔNAC50}	Frequency 50Hz AC	15	22.5	30	mA RMS
	I _{ΔNA0}	0 Angle Pulsating DC	4.5	15	42	mA RMS
	I _{ΔNA90}	90 Angle Pulsating DC	6.3	15	42	mA RMS
	I _{ΔNA135}	135 Angle Pulsating DC	3.3	15	42	mA RMS
	I _{ΔNS-DC}	Smooth DC	3	4.5	6	mA RMS
	I _{ΔN2PDC}	Two Phase Rectification DC	3.5	5	7	mA RMS
	I _{ΔN3PDC}	Three Phase Rectification DC	3.1	4.5	6.2	mA RMS
	I _{ΔNF}	Composite Current	15	25	42	mA RMS
Response time	T _{ΔNAC50@30mA}	RMS 30mA Frequency 50Hz AC	--	55	200	ms
	T _{ΔNAC50@60mA}	RMS 60mA Frequency 50Hz AC	--	30	100	ms
	T _{ΔNAC50@150mA}	RMS 150mA Frequency 50Hz AC	--	15	20	ms
	T _{ΔNA0@42mA}	RMS 42mA 0 Angle Pulsating DC	--	50	200	ms
	T _{ΔNA0@84mA}	RMS 84mA 0 Angle Pulsating DC	--	30	100	ms
	T _{ΔNA0@210mA}	RMS 210mA 0 Angle Pulsating DC	--	15	20	ms
	T _{ΔNA0@42mA+S-DC@6mA}	RMS 42mA 0 Angle Pulsating DC with 6mA Smooth DC	--	38	200	ms
	T _{ΔNA0@84mA+S-DC@6mA}	RMS 84mA 0 Angle Pulsating DC with 6mA Smooth DC	--	30	100	ms
	T _{ΔNA0@210mA+S-DC@6mA}	RMS 210mA 0 Angle Pulsating DC with 6mA Smooth DC	--	15	20	ms
	T _{ΔNS-DC@6mA}	6mA Smooth DC	--	100	200	ms
	T _{ΔNS-DC@60mA}	60mA Smooth DC	--	50	100	ms
	T _{ΔNS-DC@300mA}	300mA Smooth DC	--	15	20	ms
	T _{ΔN2PDC@60mA}	RMS 60mA Two Phase Rectification DC	--	50	100	ms
	T _{ΔN2PDC@300mA}	RMS 300mA Two Phase Rectification DC	--	15	20	ms
	T _{ΔN3PDC@60mA}	RMS 60mA Three Phase Rectification DC	--	50	100	ms
	T _{ΔN3PDC@300mA}	RMS 300mA Three Phase Rectification DC	--	15	20	ms
T _{ΔNF@210mA}	RMS 210mA Composite Current	--	15	20	ms	

EMC

Item	Specifications	
EMI	CE	CISPR32/EN55032 CLASS B
	RE	CISPR32/EN55032 CLASS B
EMS	ESD	IEC/EN61000-4-2 Contact ±6kV, Air ±8kV perf. Criteria A
	RS	IEC/EN61000-4-3 30V/m perf. Criteria A
	EFT	IEC/EN61000-4-4 ±4kV perf. Criteria A
	Surge Current	IEC62955 6000V/2Ω/3000A, 8/20us perf. Criteria B


Product Characteristic Curve

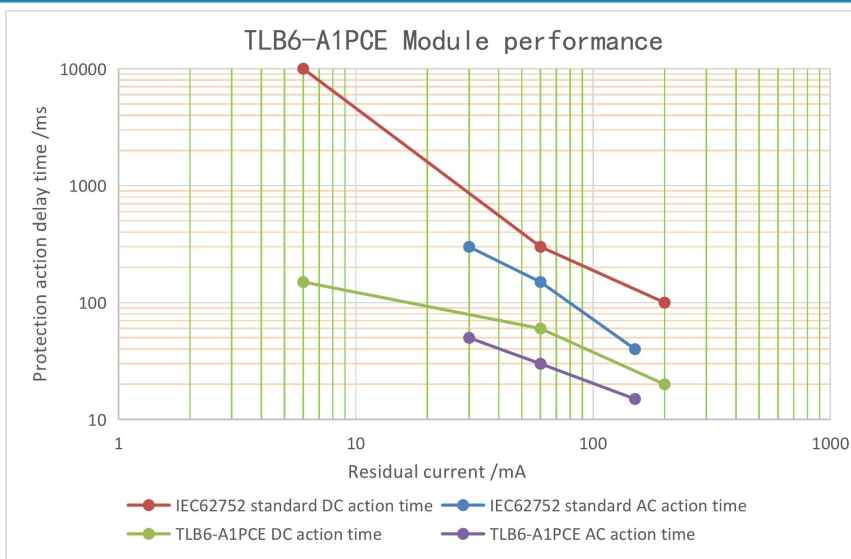

Pin Description

Pin	Mark	Description
1	VCC	The product is powered by VCC, which needs to supply 5V, and 100nF and 1uF capacitors are connected in parallel at the input end.
2	TRIP	Trip output pin, when detected > 6mA DC residual current or > 30mA AC residual current, the pin is set high and a trip signal is generated.
3	GND	Product-powered ground.
4	CAL	Zero calibration pin, when the pin inputs a duration >50ms and <100ms low voltage, the calibration function is enabled and the residual current detected at the moment is used as the zero current point of the residual current compensated for subsequent detection. This residual current compensation value is stored internally and continues to be compensated upon reboot.
5	TEST-IN	Test pin, when the pin input high level, there will be a built-in residual current, making the action signal action. It can be designed for periodic self-test of products.

Connection and Description

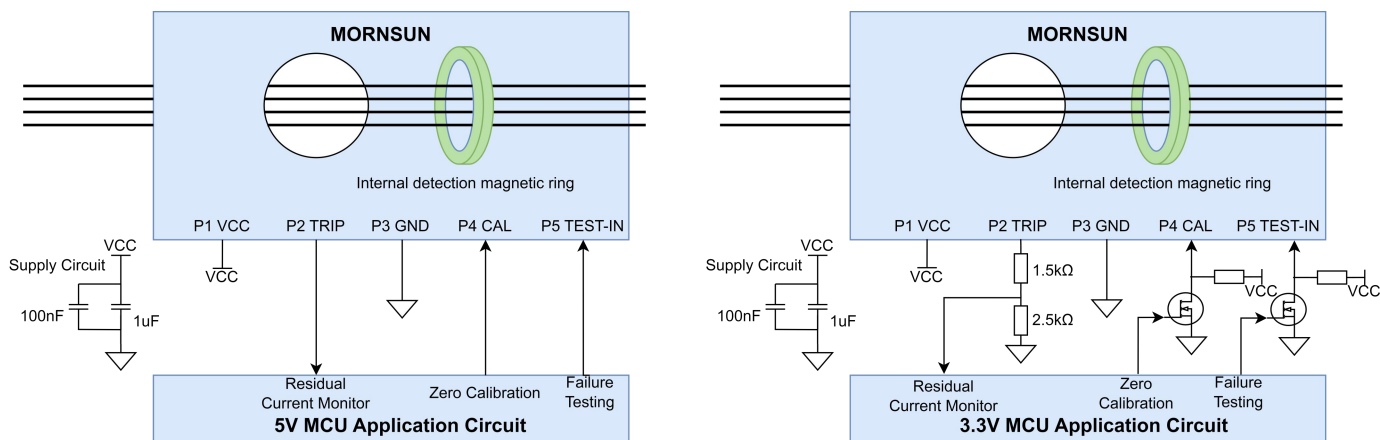


1. Two capacitors 1uF/16V and 100nF/16V need to be provided at VCC and GND for energy storage and decoupling.
2. Residual current protection monitoring pin TRIP, zero calibration pin CAL, and TEST-IN pin are generally controlled by a microcontroller.

- The residual current protection detection pin will output high level when the current value flowing through the internal detection magnetic ring exceeds the specification value.
- When the module is started, the zero calibration pin should be kept at a low level for a period of time and then placed at a high level. See the timing sequence characteristic description.
- TEST-IN is used to test the performance of residual current transducer when self-test is required, and the test signal needs to meet the timing characteristics.
- Hot plug is unavailable.
- The product is connected to 5V MCU for use, and it is necessary to pay attention to level matching. If a 3.3V MCU is connected, a level conversion circuit is required for voltage conversion (as shown in the figure above). The 5V voltage is converted to 3.3V by two resistors, and the ratio of the two resistors is generally selected to be close to 3:5. At the same time, the input impedance of the MCU should be considered, and the resistance value of the two voltages should not be greater than one-tenth of the input impedance of the MCU. For example, the values of the two resistors are 1.5kΩ and 2.5kΩ or 10kΩ and 15kΩ. In addition, the zero calibration function and failure testing function need to adjust the timing. For example, the zero calibration function of the product is effective at a low level. After connecting the MOS for level conversion, the 3.3V MCU should output a high level to make the calibration function effective, and the 3.3V MCU should output a low level when the product is not calibrated. Similarly, the 3.3V MCU output low level makes the failure testing function effective; When failure testing is not in use, the 3.3V MCU should output a high level.

Timing Characteristics

Item	Symbol	Min	Typ	Max	Unit.
Start To Calibration Interval	T1	600	--	--	ms
Calibrate Signal Maintenance Time	T2	50	--	100	
Calibration Signal Completion Wait Time	T3	--	500	--	
Test Signal Duration	T4	400	--	--	

Timing Application Design

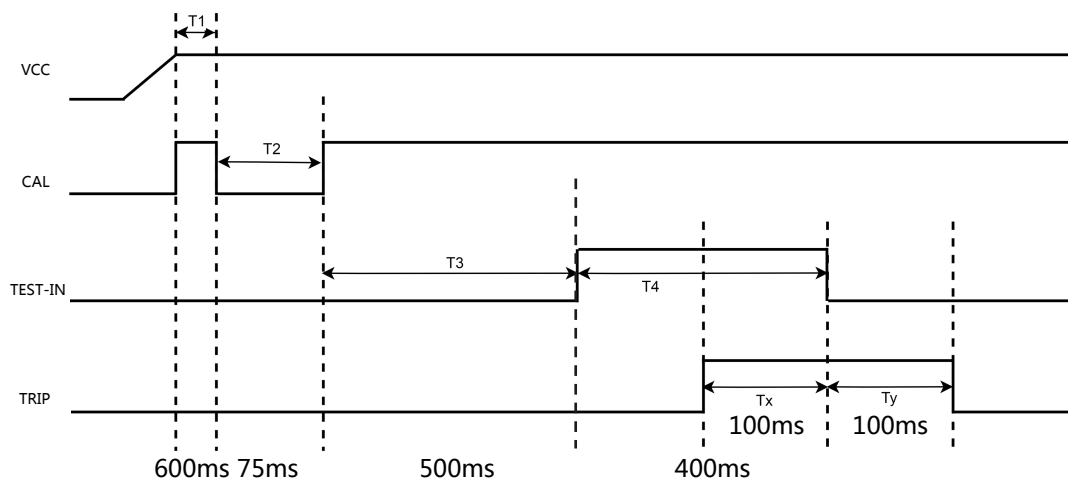


Timing application design essentials:

- The startup speed of the VCC power supply should not be too slow, and it is recommended that the speed is greater than 10V/ms.
- After the power supply is fully started, the startup and stabilization time of the module is about 200-300ms. the zero calibration delay time T1 should be greater than 100ms.
- The zero calibration signal duration T2 should be greater than 50ms and less than 100ms; When the CAL low time is greater than 50ms, TLB6-A1PCE starts to zero calibration.
- The waiting time T3 for calibration completion should be greater than 500ms.
- TEST-IN self-test signal can only be enabled after T3 is completed, and the signal duration of single round self-test is required to be T4 >400ms.

- After delaying the delay time of the protection action, the TRIP pin outputs high level. Generally speaking, $T_x = 100\text{ms}$ after detecting the TRIP signal, the TEST-IN can be set to low level and the self-test signal can be closed. Then the high level of the TRIP pin returns to low level after $T_y = 100\text{ms}$.
- It is recommended to use the calibration function at $T_a = 25^\circ\text{C}$.

Dimensions and Recommended

THIRD ANGLE PROJECTION 

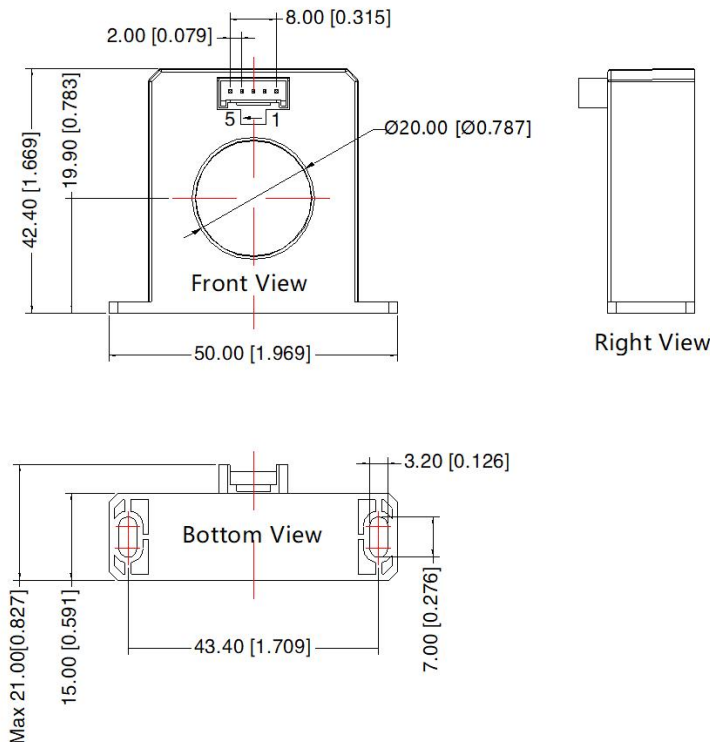

Pin-Out		
Pin	Mark	Customer Connector
1	VCC	Housing: Yeonho SMH200-5H / CJT A2008HB-5P or equivalent
2	TRIP	
3	GND	
4	CAL	
5	TEST-IN	

Note:
Unit: mm[inch]
Pin diameter tolerances: $\pm 0.10[\pm 0.004]$
General tolerances: $\pm 0.50[\pm 0.02]$

Notes:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58070020;
- All index testing methods in this datasheet are based on company corporate standards;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a = 25^\circ\text{C}$, humidity $< 75\%RH$ with nominal input voltage;
- We can provide product customization service, please contact our technicians directly for specific information;
- This products is used in electronic equipment, please follow the operation and instructions of the manual, and use it in a standard and safe environment;
- Please do not install the product in a dangerous area; beware of the risk of electric shock during operating, some modules may generate dangerous voltages (such as primary wires, power supply wires);
- This products is a build-in device, After installation, the conductive part must not be touched completely. A protective box or shield can be used;
- It is strictly forbidden to disassemble and assemble the products privately to prevent equipment without failure or malfunction;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Huangpu, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2023.9.11-A/0 Page 5 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation