


10W isolated DC-DC converter in DIP/SMD package
Ultra-wide input and regulated single output

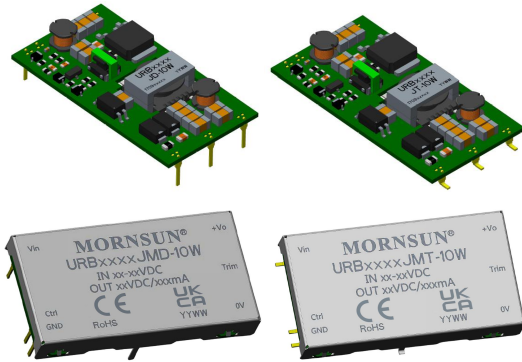

Patent Protection

CE Report UK Report CB RoHS

EN62368-1 BS EN62368-1 IEC62368-1

URB_J(M)D/T-10W series of isolated 10W DC-DC converter products have an ultra-wide 4:1 input voltage and feature efficiencies of to 87%, input to output isolation is tested with 500VAC/1500VDC, input under-voltage protection, output over-voltage, over-current, short circuit protection and they are widely used in applications such as industrial control, electricity, instruments and communication fields.

FEATURES

- Ultra-wide 4:1 input voltage range
- Ultra-thin DIP/SMD Package
- High efficiency up to 87%
- No-load power consumption as low as 0.096W
- I/O isolation test voltage 500VAC/1500VDC
- Operating ambient temperature range: -40°C to +85°C
- Input under-voltage protection, output short circuit, over-current, over-voltage protection

Selection Guide

| Certification | Part No. ① | Input Voltage (VDC) | | Output | | Full Load Efficiency® (%) Min./Typ. | Capacitive Load (μF)Max. |
|---------------|--------------------|---------------------|--------|--------------|------------------------|-------------------------------------|--------------------------|
| | | Nominal (Range) | Max. ② | Voltage(VDC) | Current (mA) Max./Min. | | |
| EN/BS EN/IEC | URB2405J(M)D/T-10W | 24 (9-36) | 40 | 5 | 2000/0 | 81/83 | 2200 |
| EN/BS EN | URB2406JT-10W | | | 6 | 1667/0 | 81/83 | 2000 |
| EN/BS EN/IEC | URB2412J(M)D/T-10W | | | 12 | 833/0 | 84/86 | 680 |
| | URB2415J(M)D/T-10W | | | 15 | 667/0 | 85/87 | 470 |
| EN/BS EN | URB2424JMT-10W | | | 24 | 417/0 | 85/87 | 220 |

Notes:

- ① URBxxxxJ(M)D/T-10W contains 4 types of products, include URBxxxxJD-10W (DIP package without case), URBxxxxJMD-10W (DIP package with case), URBxxxxJT-10W (SMD package without case) and URBxxxxJMT-10W (SMD package with case);
- ② Exceeding the maximum input voltage may cause permanent damage;
- ③ Efficiency is measured in nominal input voltage and rated output load.

Input Specifications

| Item | Operating Conditions | | Min. | Typ. | Max. | Unit |
|--|-----------------------------|---------------------------------|--|-------|--------|------|
| Input Current (full load / no-load) | Nominal input voltage | 5VDC output | -- | 502/4 | 515/40 | mA |
| | | 6VDC output | -- | 502/4 | 515/40 | |
| | | 12VDC output | -- | 485/4 | 496/12 | |
| | | 15VDC output | -- | 479/4 | 490/15 | |
| | | 24VDC output | -- | 479/4 | 490/17 | |
| Reflected Ripple Current | Nominal input voltage | | -- | 40 | -- | |
| Surge Voltage (1sec. max.) | | | -0.7 | -- | 50 | VDC |
| Start-up Voltage | | | -- | -- | 9 | |
| Input Under-voltage Protection | | | 5.5 | 6.5 | -- | |
| Input Filter | | | Pi filter | | | |
| Hot Plug | | | Unavailable | | | |
| Ctrl* | Operating temperature range | Module on | Ctrl pin pulled low to GND (0-1.2VDC) | | | |
| | | Module off | Ctrl pin open or pulled high (2.4-12VDC) | | | |
| | Normal temperature @25°C | Input current when switched off | -- | 6 | -- | mA |

Note: *The Ctrl pin voltage is referenced to input GND.

Output Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit |
|------------------------------|---|-----------------------------------|------|-------|-------|
| Voltage Accuracy | 0% -100% load | -- | ±1 | ±3 | % |
| Linear Regulation | Input voltage variation from low to high at full load | -- | ±0.2 | ±0.5 | |
| Load Regulation ^① | 5% -100% load | -- | ±0.5 | ±1 | |
| Transient Recovery Time | 25% load step change, nominal input voltage | -- | 300 | 500 | μs |
| Transient Response Deviation | | -- | ±3 | ±5 | % |
| Temperature Coefficient | Full load | -- | -- | ±0.03 | %/°C |
| Ripple & Noise ^② | 20MHz bandwidth, 5% -100% load | -- | 50 | 100 | mVp-p |
| Trim | Nominal input voltage | -- | ±5 | -- | %Vo |
| Over-voltage Protection | Input voltage range | 110 | -- | 160 | |
| Over-current Protection | | 110 | 140 | 200 | |
| Short-circuit Protection | | Hiccup, continuous, self-recovery | | | |

Note:

①Load regulation for 0%-100% load is ±5%;

②Under 0% -5% load conditions, ripple & noise does not exceed 5%Vo. The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specification

| Item | Operating Conditions | | Min. | Typ. | Max. | Unit |
|--------------------------------------|--|--|---|------|------|---------|
| Isolation | Input-output Electric Strength Test for 1 minute with a leakage current of 5mA max | | 500 | -- | -- | VAC |
| | Input-case | Electric Strength Test for 1 minute with a leakage current of 5mA max (only for URB_JMD/JMT-10W series products) | 500 | -- | -- | |
| | Output-case | | 500 | -- | -- | |
| | Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max | | 1500 | -- | -- | VDC |
| | Input-case | Electric Strength Test for 1 minute with a leakage current of 1mA max (only for URB_JMD/JMT-10W series products) | 1500 | -- | -- | |
| | Output-case | | 1500 | -- | -- | |
| Insulation Resistance | Input-output resistance at 500VDC, Ta=25℃, humidity=70%RH | | 100 | -- | -- | MΩ |
| | Input-case | resistance at 500VDC, Ta=25℃, humidity=70%RH (only for URB_JMD/JMT-10W series products) | 100 | -- | -- | |
| | Output-case | | 100 | -- | -- | |
| Isolation Capacitance | Input-output capacitance at 100kHz/0.1V | | -- | 1000 | -- | pF |
| Operating Temperature | See Fig. 1 | | -40 | -- | +85 | ℃ |
| Storage Humidity | Non-condensing | | 5 | -- | 95 | %RH |
| Storage Temperature | | | -55 | -- | +125 | ℃ |
| Pin Soldering Resistance Temperature | Soldering spot is 1.5mm away from case for 10 seconds | | -- | -- | +300 | |
| Reflow soldering Temperature | Only for URB_J(M)T-10W series products | | Peak temp.≤245℃, maximum duration time≤60s over 217℃. For actual application, please refer to IPC/JEDEC J-STD-020D.1. | | | |
| Vibration | | | 10-150Hz, 5G, 90Min. along X, Y and Z | | | |
| Switching Frequency * | PWM mode | | -- | 350 | -- | kHz |
| MTBF | MIL-HDBK-217F@25℃ | | 1000 | -- | -- | k hours |
| Moisture Sensitivity Level (MSL) | IPC/JEDEC J-STD-020D.1 | | Level 1 | | | |

Note: *Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.

Mechanical Specifications

| | | |
|----------------|-----------------------------|------------------------|
| Case Material | Aluminum alloy | |
| Dimensions | URB_JD-10W series | 39.20 x 20.80 x 6.10mm |
| | URB_JT-10W series | 41.40 x 20.80 x 6.30mm |
| | URB_JMD-10W series | 40.20 x 22.00 x 6.80mm |
| | URB_JMT-10W series | 41.40 x 22.00 x 7.00mm |
| Weight | URB_JD/JT-10W series | 4.7g(Typ.) |
| | URB_JMD/JMT-10W series | 6.7g(Typ.) |
| Cooling method | Free air convection (20LFM) | |

Electromagnetic compatibility (EMC)

| | | | | |
|-----------|-------|-----------------|---|------------------|
| Emissions | CE | CISPR32/EN55032 | CLASS A(without extra components)/CLASS B (see Fig.3-② for recommended circuit) | |
| | RE | CISPR32/EN55032 | CLASS B (see Fig.3-② for recommended circuit) | |
| Immunity | ESD | IEC/EN61000-4-2 | Contact $\pm 6\text{kV}$ | perf. Criteria B |
| | RS | IEC/EN61000-4-3 | 10V/m | perf. Criteria A |
| | EFT | IEC/EN61000-4-4 | $\pm 2\text{kV}$ (see Fig.3-① for recommended circuit) | perf. Criteria B |
| | Surge | IEC/EN61000-4-5 | line to line $\pm 2\text{kV}$ (see Fig.3-① for recommended circuit) | perf. Criteria B |
| | CS | IEC/EN61000-4-6 | 3 Vr.m.s | perf. Criteria A |

Typical Characteristic Curves






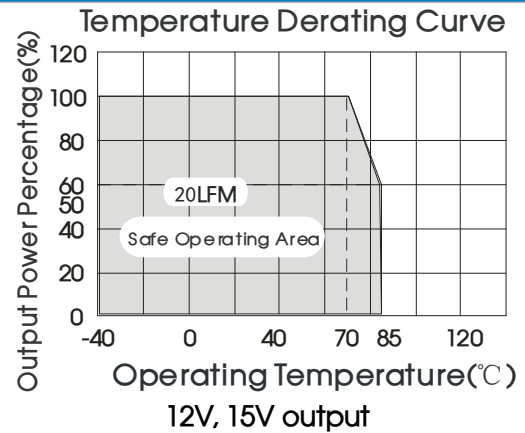


Fig. 1

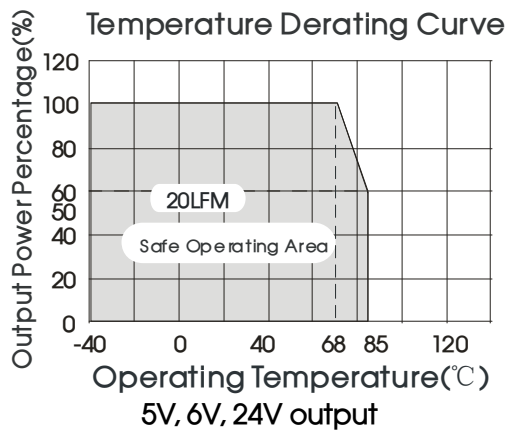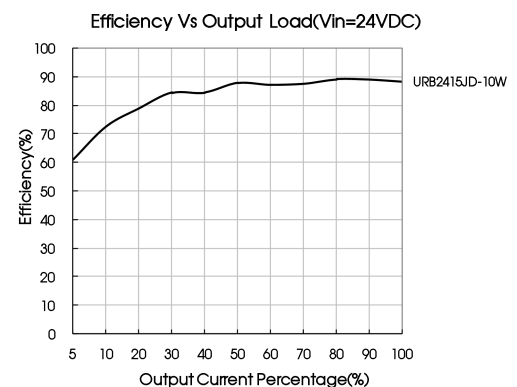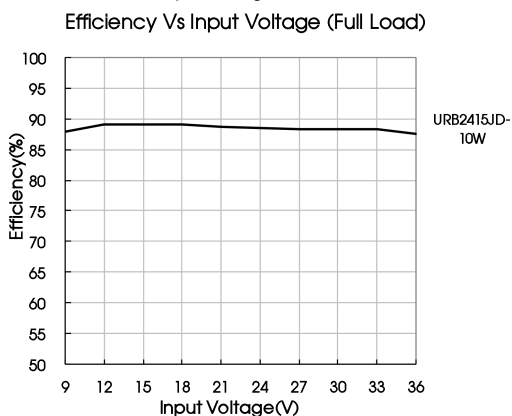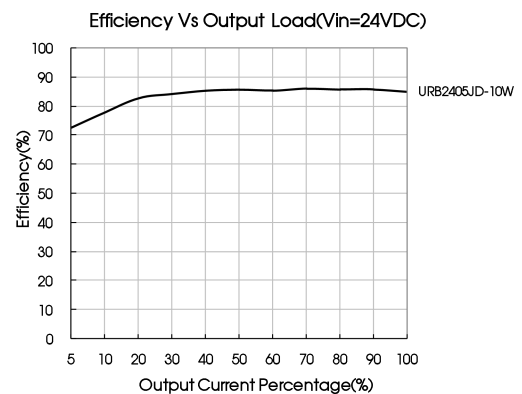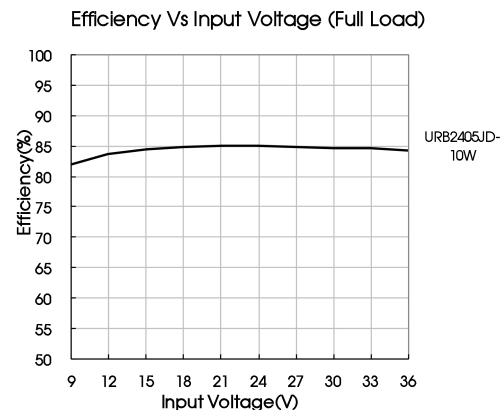

Design Reference

1. Typical application

All the DC-DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the max. capacitive load value of the product.



Fig. 2

| Vout (VDC) | Cin | Cout |
|------------|-----------|----------|
| 5/6 | 100μF/50V | 10μF/16V |
| 12/15 | | 10μF/25V |
| 24 | | 10μF/50V |

2. EMC compliance circuit

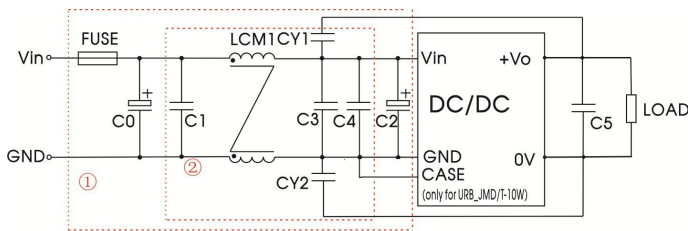


Fig. 3


Notes: For EMC tests we use Part ① in Fig. 3 for immunity and part ② for emissions test. Selecting based on needs.

lists of components:

| Model | Vin: 24VDC |
|----------|--|
| FUSE | Choose according to actual input current |
| C0 | 680μF/100V |
| C1/C3/C4 | 4.7μF/50V |
| C2 | 470μF/100V |
| C5 | 10μF/25V |
| LCM1 | 3.3mH |
| CY1/CY2 | 1000pF/≥2000VDC |

Note: *For URBxxxxJMD/T-10W, the case should be connected to input pin GND when testing EMC performance

3. Trim Function for Output Voltage Adjustment (open if unused)

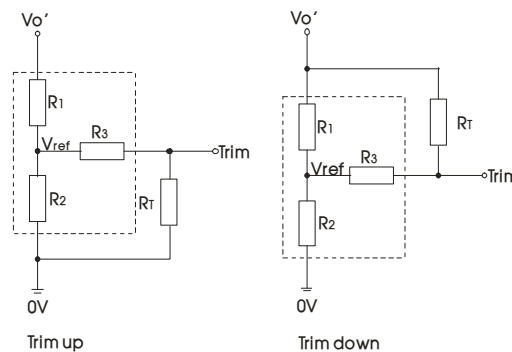

TRIM resistor connection (dashed line shows internal resistor network)

Calculating Trim resistor values:

$$\begin{aligned} \text{up: } R_T &= \frac{aR_2}{R_2-a} - R_3 & a &= \frac{V_{ref}}{V_o' - V_{ref}} \cdot R_1 \\ \text{down: } R_T &= \frac{aR_1}{R_1-a} - R_3 & a &= \frac{V_o' - V_{ref}}{V_{ref}} \cdot R_2 \end{aligned}$$

R_T = Trim Resistor value;
 a = self-defined parameter;
 V_o' = desired output voltage.


| Vout(VDC) | R1(kΩ) | R2(kΩ) | R3(kΩ) | Vref(V) |
|-----------|--------|--------|--------|---------|
| 5 | 2.94 | 2.87 | 15 | 2.5 |
| 6 | 4.06 | 2.87 | 15 | 2.5 |
| 12 | 11 | 2.87 | 17.4 | 2.5 |
| 15 | 14.5 | 2.87 | 15 | 2.5 |
| 24 | 24.87 | 2.87 | 15 | 2.5 |

4. It is not allowed to connect modules output in parallel to enlarge the power


5. For additional information please refer to DC-DC converter application notes on

www.mornsun-power.com


URB_JD-10W (DIP package without case) Dimensions and Recommended Layout

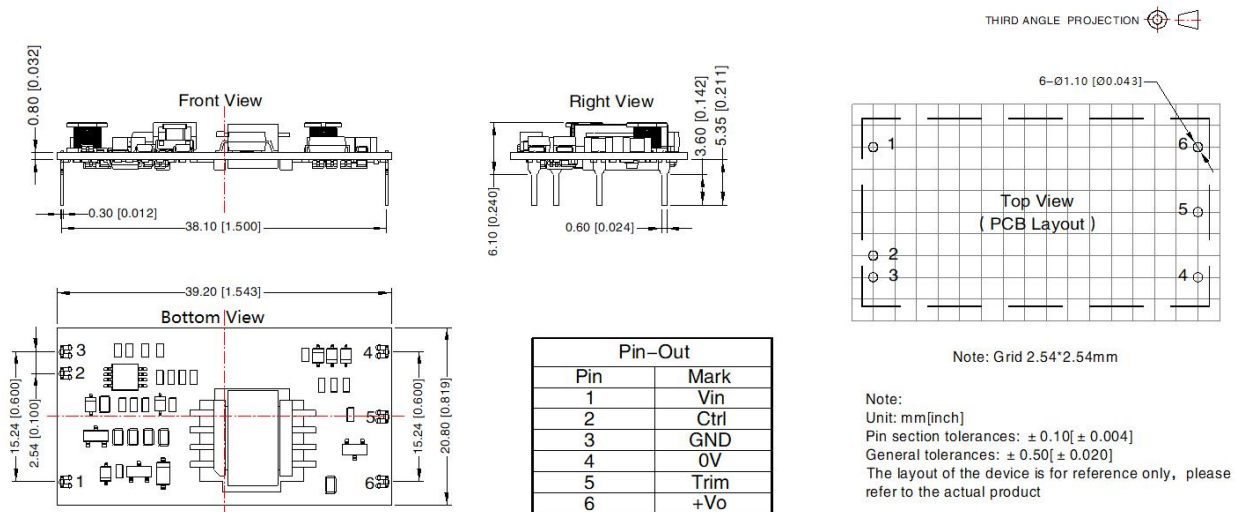


URB_JMD-10W (DIP package with case) Dimensions and Recommended Layout

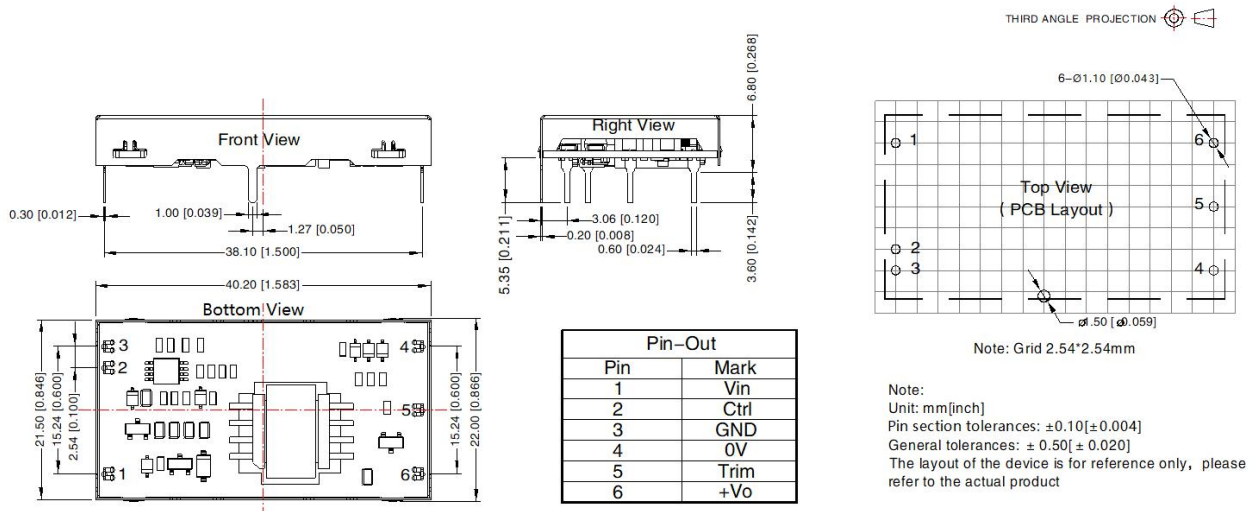

URB_JT-10W (SMD package without case) Dimensions and Recommended Layout

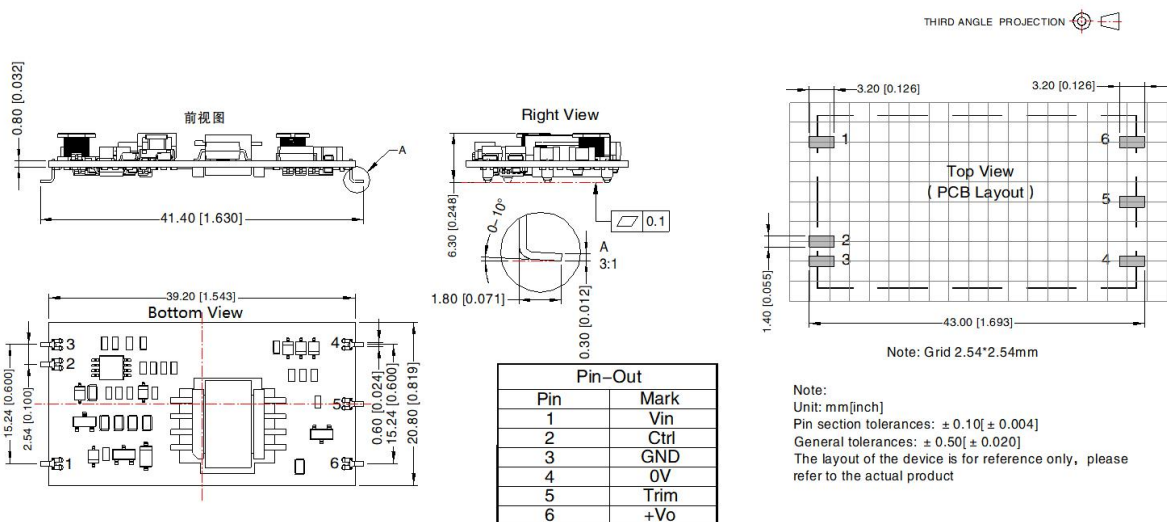

URB_JMT-10W (SMD package with case) Dimensions and Recommended Layout

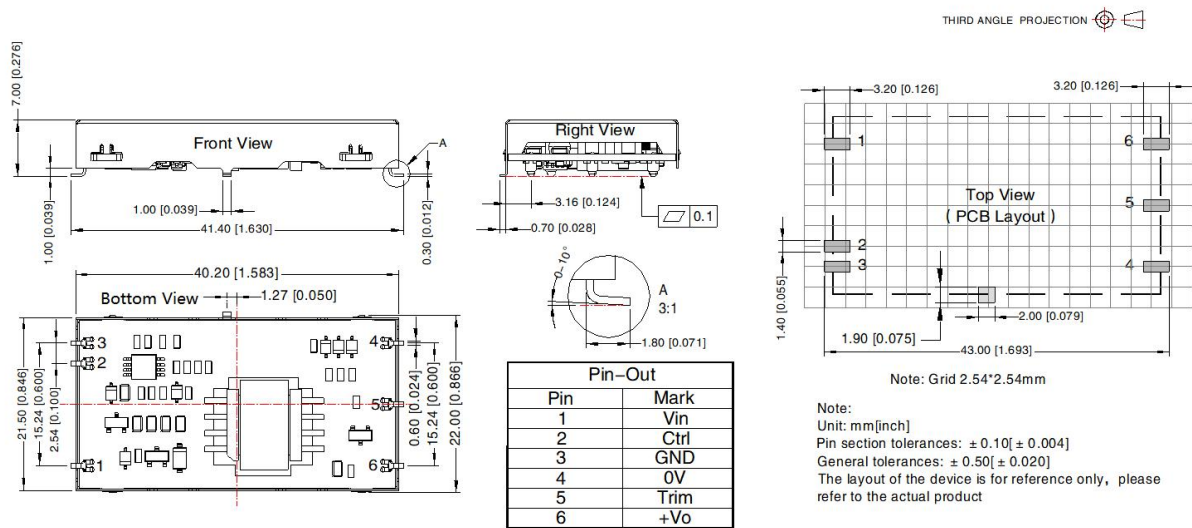

Note:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number:58210124;
2. The maximum capacitive load offered were tested at input voltage range and full load;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
4. All index testing methods in this datasheet are based on company corporate standards;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8, Nanyun 4th Road, Huangpu District, Guangzhou, China
Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com