


6W isolated DC-DC converter in SIP package
Wide input and regulated single output



Patent Protection



Report

EN62368-1



Report

BS EN62368-1

RoHS

FEATURES

- Wide 2:1 input voltage range
- High efficiency up to 87%
- No-load power consumption as low as 0.12W
- I/O isolation test voltage 1.6k VDC
- Input under-voltage protection, output short-circuit, over-current protection
- Operating ambient temperature range: -40°C to +105°C
- Compact SIP package
- Industry standard pin-out

VRB_S-6WR3 series of isolated 6W DC-DC converter products with a wide 2:1 input voltage range. They feature efficiencies of up to 87%, 1600VDC input to output isolation, operating ambient temperature range of -40°C to +105°C, input under-voltage protection, output short-circuit, over-current protection and they are widely used in applications such as medical care, industrial control, electric power, instruments and communication fields.

Selection Guide

Certification	Part No.	Input Voltage (VDC)		Output		Full Load Efficiency [®] (%)Min./Typ.	Capacitive Load (μF)Max.
		Nominal (Range)	Max. ^①	Voltage (VDC)	Current (mA) Max./Min.		
EN/BS EN	VRB1203S-6WR3	12 (9-18)	20	3.3	1350/0	74/76	1800
	VRB1205S-6WR3			5	1200/0	78/80	1000
	VRB1209S-6WR3			9	667/0	80/82	470
	VRB1212S-6WR3			12	500/0	82/84	470
	VRB1215S-6WR3			15	400/0	82/84	220
	VRB1224S-6WR3			24	250/0	82/84	100
	VRB2403S-6WR3	24 (18-36)	40	3.3	1350/0	76/78	1800
	VRB2405S-6WR3			5	1200/0	80/82	1000
	VRB2409S-6WR3			9	667/0	82/84	470
	VRB2412S-6WR3			12	500/0	84/86	470
	VRB2415S-6WR3			15	400/0	85/87	220
	VRB2424S-6WR3			24	250/0	83/85	100

Note: ① Exceeding the maximum input voltage may cause permanent damage;
② Efficiency is measured at nominal input voltage and rated output load.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Input Current (full load / no-load)	12VDC nominal input series, nominal input voltage	3.3V output	--	489/12	502/18	mA
		Others	--	625/12	641/18	
	24VDC nominal input series, nominal input voltage	3.3V output	--	238/5	245/12	
		5V output	--	305/5	313/12	
Reflected Ripple Current			--	50	--	
			--	50	--	
Surge Voltage (1sec. max.)	12VDC nominal input voltage	-0.7	--	25	VDC	
	24VDC nominal input voltage	-0.7	--	50		
Start-up Voltage	12VDC nominal input voltage	--	--	9		
	24VDC nominal input voltage	--	--	18		
Input Under-voltage Protection	12VDC nominal input voltage	5.5	6.5	--		
	24VDC nominal input voltage	12	15.5	--		

Input Filter		Capacitance Filter			
Hot Plug		Unavailable			
Ctrl *	Module on	Ctrl pin open or pulled high (3.5-12VDC)			
	Module off	Ctrl pin pulled low to GND (0-1.2VDC)			
	Input current when off	--	6	10	mA
Note: *The Ctrl pin voltage is referenced to input GND.					

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Voltage Accuracy ^①	5%-100% load	--	±1	±2	%	
Linear Regulation	Input voltage variation from low to high at full load	--	±0.5	±1		
Load Regulation ^②	5%-100% load	--	±0.5	±1.5		
Transient Recovery Time		--	300	500	μs	
Transient Response Deviation	25% load step change	3.3V/5V output	--	±5	±8	%
		Others	--	±3	±5	
Temperature Coefficient	Full load	--	--	±0.03	%/°C	
Ripple & Noise ^③	20MHz bandwidth, 5%-100% load	--	50	100	mV p-p	
Over-current Protection	Input voltage range	110	160	230	%Io	
Short-circuit Protection		Continuous, self-recovery				
Note: ①Under 0%-5% load conditions, the maximum output voltage accuracy is ±3%;						
②Load regulation for 0%-100% load is ±3%;						
③Under 0% -5% load conditions, ripple & noise does not exceed 150mV, the "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.						

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric Strength test for 1 minute with a leakage current of 1mA max.	1600	--	--	VDC
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	--	1000	--	pF
Operating Temperature	see Fig. 1	-40	--	+105	°C
Storage Humidity	Non-condensing	5	--	95	%RH
Storage Temperature		-55	--	+125	°C
Pin Soldering Resistance Temperature*	Soldering spot is 1.5mm away from case for 10 seconds	--	--	300	
	Wave soldering, 10 seconds	255	260	265	
Vibration		10-150Hz, 5G, 0.75mm. along X, Y and Z			
Switching Frequency ^①	PWM mode	--	500	--	kHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	k hours
Note:*The pin resistance temperature is not the actual set temperature of the soldering iron, but the temperature required for a good solder joint. The actual set temperature by the customer needs to be comprehensively set based on the thickness of the PCB, the size of the copper cladding, the power of the soldering iron, and the selection of the soldering iron tip.					
①Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.					

Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94-V0)
Dimensions	22.00 x 9.50 x 12.00 mm
Weight	4.6g (Typ.)
Cooling method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B (see Fig.3-② for recommended circuit)	
	RE	CISPR32/EN55032	CLASS B (see Fig.3-② for recommended circuit)	
Immunity	ESD	IEC/EN61000-4-2	Contact ±4kV	perf. Criteria B
Immunity	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±2kV (see Fig.3-① for recommended circuit)	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±2kV (see Fig.3-① for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A

Typical Characteristic Curves





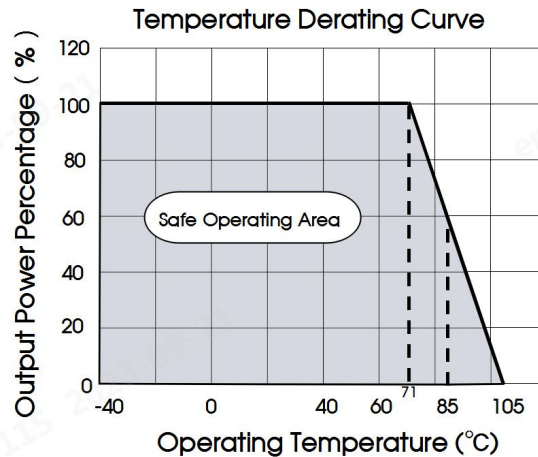


Fig. 1

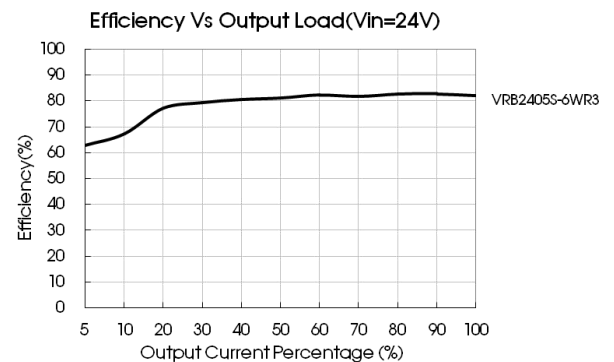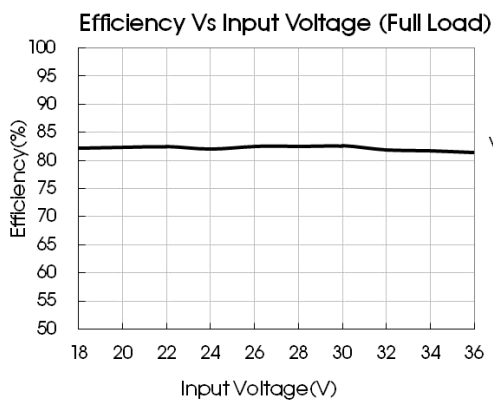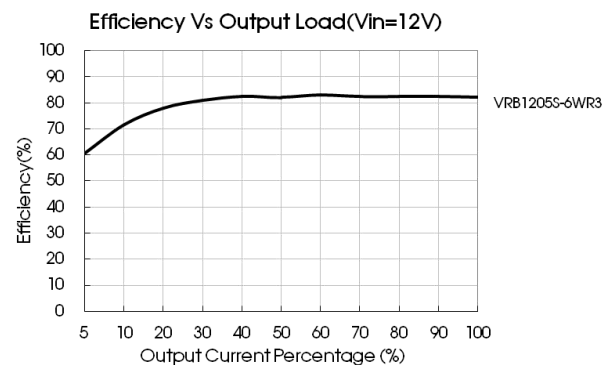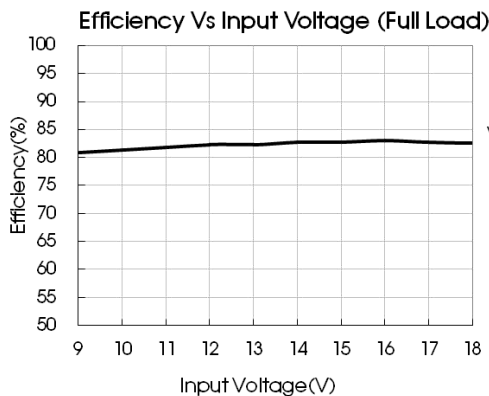

Design Reference

1. Typical application

All the DC/DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2. Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.



Fig. 2

Cin		Vout(VDC)	Cout
Vin: 12VDC	Vin: 24VDC		
100μF/50V	100μF/100V	3.3/5/9	22μF/16V
		12/15	22μF/25V
		24	22μF/50V

2. EMC compliance circuit

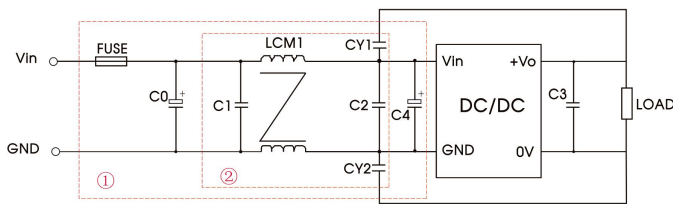



Fig. 3

Notes: We use Part ① in Fig. 3 for Immunity test and part ② for Emissions test. Selecting based on needs.

Parameter description:


Model	Vin: 12VDC	Vin: 24VDC
FUSE	Choose according to actual input current	
C0/C4	330μF/35V	330μF/50V
C1/C2	10μF/50V	
C3	Refer to the Cout in Fig2	
LCM1	470μH, recommended to use MORNSUN's FL2D-13-471R3	
CY1/CY2	1nF/400VAC	

Dimensions and Recommended Layout

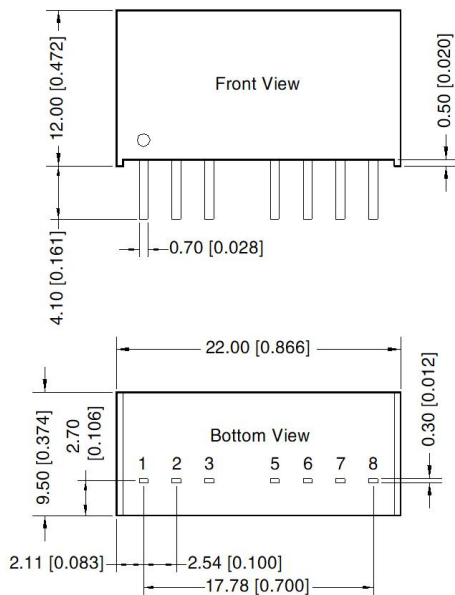

Note:
Unit: mm[inch]
Pin section tolerances: $\pm 0.10[\pm 0.004]$
General tolerances: $\pm 0.50[\pm 0.020]$

THIRD ANGLE PROJECTION

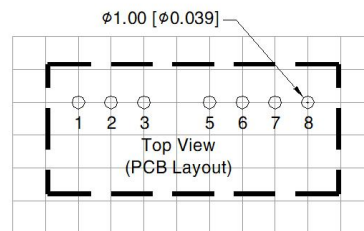

Note: Grid 2.54*2.54mm

Pin-Out	
Pin	Mark
1	GND
2	Vin
3	Ctrl
5	NC
6	+Vo
7	0V
8	NC

NC: Pin to be isolated from circuitry

Note:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging number: 58210004;
2. The maximum capacitive load offered were tested at input voltage range and full load;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
4. All index testing methods in this datasheet are based on company corporate standards;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com