#### 10W, AC-DC converter

# **MORNSUN**<sup>®</sup>



## **FEATURES**

- Ultra-wide 85 305VAC and 70 430VDC input voltage range
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -40℃ to +85℃
- High isolation dual output
- Multi application, compact size, flexible layout
- Output short circuit, over-current, over-voltage protection

LS10-13Dxx series is one of Mornsun's highly efficient green power with multiple outputs AC-DC converter series. They feature wide input range accepting either AC or DC voltage, high efficiency, high reliability, low power consumption and reinforced isolation. It meets IEC/EN61558, IEC/EN60335, IEC/EN/UL62368 standards. All models are particularly suitable for industrial control, electric power, instrumentation and smart home applications which have high requirement for dimension and don't have high requirement on EMC. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

Selection (	Suide						
Certification	Certification Part No.	Output Power	Nominal Output Voltage and Current		Efficiency at 230VAC	Capacitive Load (uF) Max.	
		•	(Vo1/lo1)	(Vo2/lo2)	(%) Typ.	Vo1	Vo2
	LS10-13D0505-06		5V/1400mA	5V/600mA	77	470	330
	LS10-13DY505-06		5.7V/1230mA	5V/600mA	77	470	330
EN	LS10-13DY512-04	10W	5.7V/910mA	12V/400mA	80	470	200
	LS10-13DY524-02		5.7V/910mA	24V/200mA	80	330	100
	LS10-13D1212-02		12V/630mA	12V/200mA	82	200	100

Input Specifications						
Item	Operating Conditions	Min.	Тур.	Max.	Unit	
Input Voltage Dange	AC input	85		305	VAC	
Input Voltage Range	DC input	70		430	VDC	
Input Frequency		47		63	Hz	
	115VAC			0.3		
Input Current	230VAC			0.2		
	115VAC		20		A	
Inrush Current	230VAC		40			
leakage Current	277VAC/50Hz		0.25mA RMS Max			
Recommended External Input Fuse		2A/300V, slow-blow, required				
Hot Plug		Unavailable				

Output Specifications						
Item	Operating Conditio	ns	Min.	Тур.	Max.	Unit
	Vo1			±2		
Output Voltage Accuracy	Vo2	Vo2		±8		
Line De su destien	Full to evol	Vo1		±l		
Line Regulation	Full load	Vo2		±1.5		
	10%-100% load	Vo1		±l		%
Load Regulation	(balanced load)	Vo2		±5		
		LS10-13D0505-06			±30	
Cross Regulation	10%-100% load	LS10-13DY505-06			±30	
		Others			±20	
Ripple & Noise*	20MHz bandwidth (	peak-to-peak value)		80	150	mV

**MORNSUN**<sup>®</sup>

#### MORNSUN Guangzhou Science & Technology Co., Ltd.

2022.12.27-A/1 Page 1 of 7

## AC/DC Converter

LS10-13Dxx Series

# MORNSUN®

Standby Power Consumption	230VAC				0.3	W	
Temperature Coefficient	Vo1			±0.15		%/°C	
Short Circuit Protection			Hico	cup, continuou	s, self-recove	əry	
Over-current Protection				$\geq$ 110% lo, self	f-recovery		
	Vo1 5V/5.7V output 12V output		$\leq$ 9VDC (Output Voltage hiccup or clamp)				
Over-voltage Protection			≤16VDC	(Output Volta	ge hiccup or	clamp)	
Minimum Load			10			%	
11-1-1	115VAC input			8			
Hold-up Time	230VAC input			40		ms	
Note: * The "parallel cable" method is u	used for ripple and noise	test, please refer to AC-DC Conv	verter Application	Notes for specific	information.		

General S	<b>Specifications</b>						
Item		Operating Conditions	Min.	Тур.	Max.	Unit	
			3600			VAC	
Isolation	Input-output	Electric Strength Test for 1min.,	5000				
	Vo1-Vo2	leakage current <5mA	500			VDC	
Insulation	Input-output	At 500VDC	100			MΩ	
Operating Ten	nperature		-40		+85	°C	
Storage Temperature			-40		+105	Ĵ, Ĉ	
Storage Humic	dity				95	%RH	
	n or other	Wave-soldering		<b>260 ± 5</b> ℃; time: 5 - 10s			
Soldering Tem	perditure	Manual-welding		360 ± 10℃; time: 3 - 5s			
Switching Free	quency			65		kHz	
		<b>+60</b> ℃ to +85℃	2.0			<b>%/</b> °C	
Power Deratin	Ig	85VAC - 100VAC	1.33			04.040	
		277VAC - 305VAC	0.714			%/VAC	
Safety Standard			Design refer t	EN62368-1 (Report) Safety Approval; Design refer to IEC/EN61558-1, IEC/EN60335-1 IEC/UL62368-1		35-1,	
Safety Class			CLASS II				
MTBF			MIL-HDBK-217	<b>F@25°</b> ℃ >1,00	0,000 h		

Mechanical Specifications				
Dimension	34.50 x 18.00 x 14.75 mm			
Weight	10g (Тур.)			
Cooling method	Free air convection			

Electro	magnetic Compatibility	(EMC)		
		CISPR32/EN55032	CLASS A (Application circuit 1, 4)	
EMI	CE	CISPR32/EN55032	CLASS B (Application circuit 2, 3)	
	RE	CISPR32/EN55032	CLASS B (Application circuit 1, 2, 3, 4)	
	ESD	IEC/EN61000-4-2	Contact ±6KV	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±4KV (Application circuit 1, 2, 3, 4)	perf. Criteria B
EMS	Surge	IEC/EN61000-4-5	line to line $\pm 1$ KV (Application circuit 1, 2)	perf. Criteria B
LIVIO	Surge	IEC/EN61000-4-5	line to line $\pm 2$ KV (Application circuit 3, 4)	pen. Chiena b
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11	0%, 70%	perf. Criteria B


**MORNSUN**®

#### MORNSUN Guangzhou Science & Technology Co., Ltd.

2022.12.27-A/1 Page 2 of 7

#### Product Characteristic Curve


# **MORNSUN**<sup>®</sup>

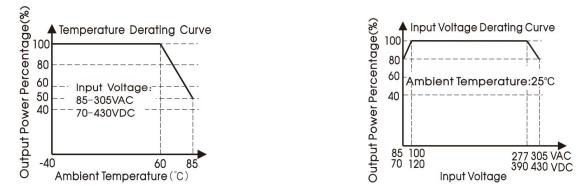


Note:

1) With an AC input between 85 -100VAC/277- 305VAC and a DC input between 70 - 120VDC/390 - 430VDC, the output power must be derated as per temperature derating curves;

(2) This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

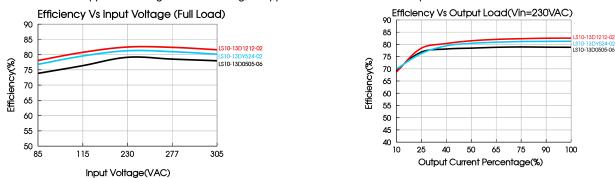

#### Additional Circuits Design Reference

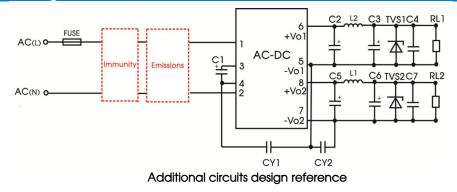

	Additional components selection guide (No EMC devices)																	
Part No.	FUSE (required)	C1 (required)	C2 (required)	C5 (required)	L1/L2 (required)	C3	C6	C4/C7	CY1	CY2	TVS1	TVS2						
LS10-13D0505-06				000.5/1/1/			220uF/				SMBJ7.0A	SMBJ7.0A						
LS10-13DY505-06			470uF/	220uF/16V	22007/100	2200F/10V		v	50				16V				SMBJ12A	SMBJ7.0A
LS10-13DY512-04	2A/300V	22uF/ 450V	16V (solid-state	220uF/25V	2.2uH	220uF/ 16V	_	0.1uF/ 50V	InF/ 400VAC	InF/ 250VAC	SMBJ12A	SMBJ20A						
LS10-13DY524-02			capacitor)	220uF/35V	-		-				SMBJ12A	SMBJ30A						
LS10-13D1212-02				220uF/25V	-		-				SMBJ20A	SMBJ20A						

#### Note

1. C1: input capacitors; C2, C5: output storage capacitors, they must be connected externally.

2. We recommend using an electrolytic capacitor with high frequency and low ESR rating for C3 (refer to manufacture's datasheet). Combined with C2, L2, they form a pi-type filter circuit. Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C4, C7 is a ceramic capacitor, used for filtering high frequency noise.

3. A suppressor diode (TVS) is recommended to protect the application in case of converter failure and specification should be 1.2 times of the output voltage. 4. The distance of the original secondary side isolation belt is greater than 6mm to meet the safety requirements; In the peripheral layout, it is also necessary to pay attention to the creepage distance greater than 6mm and the electrical clearance greater than 5.5mm, which can meet the certification as a whole together with the periphery.

5. LDM ( 2.2mH, P/N: 12050564); L1/L2 ( 2.2uH, P/N: 12050329) Mornsun quotation is available.




MORNSUN Guangzhou Science & Technology Co., Ltd.

2022.12.27-A/1 Page 3 of 7

# **MORNSUN**<sup>®</sup>


## **Environmental Application EMC Solution**

	Envi	ronmental application EMC	solution select	ion table		
Recommended circuit	Application environmental	Typical industry	Input voltage range	Environment temperature	Emissions	Immunity
1	Basic application	None		<b>-40</b> ℃ to +85℃	Class A	Level 3
0	Indoor civil environment	Smart home/Home appliances (2Y)	85 - 305VAC			1
2	Indoor general environment	Intelligent building/Intelligent agriculture		<b>-25℃ to +55</b> ℃	Class B	Level 3
3	Indoor industrial environment	Manufacturing workshop	00-300VAC	<b>-25</b> ℃ to +55℃	Class B	Level 4
4	Outdoor general environment	ITS/Video monitoring/Charging point/Communication/Security and protection		<b>-40°</b> ℃ to +85℃	Class A	Level 4

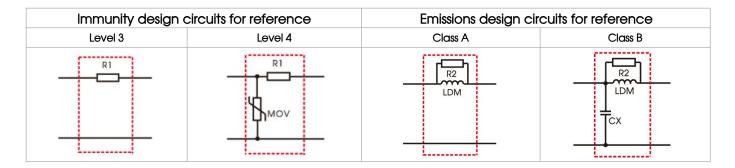

## Electromagnetic Compatibility Solution--Recommended Circuit

## 1. Application circuit 1—Basic application

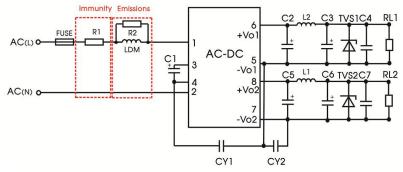

#### recommended circuit 1

Application environmental	Ambient temperature range	Immunity level	Emissions class		
Basic application	<b>-40</b> ℃ to +85℃	Level 3	Class A		
Component		Recommended value			
FUSE		2A/300V, slow-blow, required			
RI		6.8 $\Omega$ /3W (wire-wound resistor, required)			
R2		10K/1206/(1/4W) (SMD resistor)			
LDM		2.2mH			


Note 1: R1 is the input plug-in resistor, this resistor needs to be a wire-wound resistor (required), please do not select SMD resistor or carbon film resistor. Note 2: LDM is the inductor of the input plug-in, the inductance with saturation current ≥0.31A should be selected.

**MORNSUN**<sup>®</sup>

MORNSUN Guangzhou Science & Technology Co., Ltd.

# **MORNSUN®**

2. Application circuit 2—Indoor civil /Universal system recommended circuits for general environment

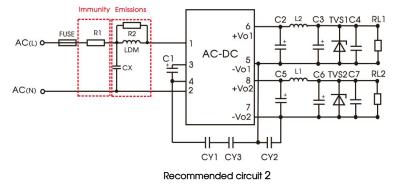


Application environmental	Ambient temperature range	Immunity level	Emissions class
Indoor civil /general	<b>-25</b> ℃ to +55℃	Level 3	Class B

Component	Recommended value		
FUSE	2A/300V, slow-blow, required		
RI	6.8 $\Omega$ /3W (wire-wound resistor, required)		
R2	10K/1206/(1/4W) (SMD resistor)		
CX	0.1uF/305VAC		
LDM	2.2mH		

Note 1: In the home application environment, the two Y capacitors of the primary and secondary need to be externally connected (CY1/CY3, value at 2.2nF/250VAC), which can meet the EN60335 certification. Note 2: According to the certification requirements, the X capacitor needs to be connected in parallel with the bleeder resistance, the

recommended resistance value is less than  $3.8 M\Omega$  , and the actual need to be selected according to the certification standard. Note 3: R1 is the input plug-in resistor, this resistor needs to be a wire-wound resistor (required), please do not select SMD resistor or carbon film resistor. Note 4: LDM is the inductor of the input plug-in, the inductance with saturation current  $\ge$  0.31A should be selected.

#### 3. Application circuit 3—Universal system recommended circuits for induor industrial environment

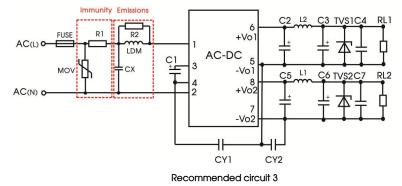

Application environmental	Ambient temperature range	Immunity level	Emissions class
Indoor industrial	<b>-25</b> ℃ to +55℃	Level 4	Class B

Component	Recommended value	
FUSE	2A/300V, slow-blow, required	
MOV	S10K350	
RI	6.8 Ω /3W (wire-wound resistor, required)	
R2	10K/1206/(1/4W) (SMD resistor)	
CX	0.1uF/305VAC	
LDM	2.2mH	

Note 1: According to the certification requirements, the X capacitor needs to be connected in parallel with the bleeder resistance, the recommended resistance value is less than  $3.8M\Omega$ , and the actual need to be selected according to the certification standard. Note 2: R1 is the input plug-in resistor, this resistor needs to be a wire-wound resistor (required), please do not select SMD resistor or carbon film resistor. Note 3: LDM is the inductor of the input plug-in, the inductance with saturation current  $\ge$  0.31A should be selected.




MORNSUN Guangzhou Science & Technology Co., Ltd.

2022.12.27-A/1 Page 5 of 7

# **MORNSUN**<sup>®</sup>

## 4. Application circuit 4——Universal system recommended circuits for outdoor general environment

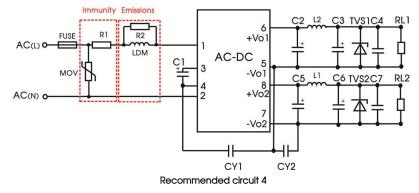

Application environmental	Ambient temperature range	Immunity level	Emissions class
Outdoor general environment	<b>-40</b> °C to +85°C	Level 4	Class A


Component	Recommended value	
FUSE 2A/300V, slow-blow, required		
MOV	S10K350	
RI	6.8 $\Omega$ /3W (wire-wound resistor, required)	
R2	10K/1206/(1/4W) (SMD resistor)	
LDM	2.2mH	

Note 1: R1 is the input plug-in resistor, this resistor needs to be a wire-wound resistor (required), please do not select SMD resistor or carbon film resistor. Note 2: LDM is the inductor of the input plug-in, the inductance with saturation current  $\geq$  0.31A should be selected.

5. For additional information please refer to application notes on www.mornsun-power.com.

## Dimensions and Recommended Layout

## LS10-13Dxx series dimensions

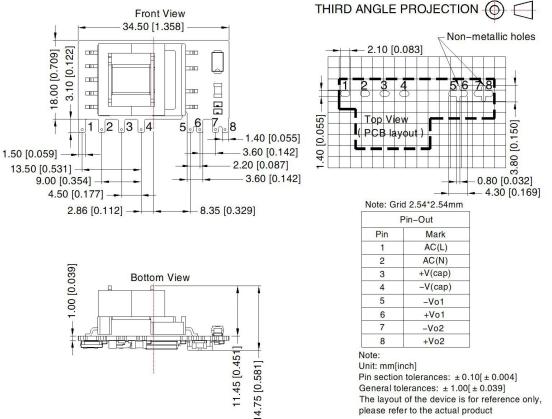


**MORNSUN®** 

#### MORNSUN Guangzhou Science & Technology Co., Ltd.

2022.12.27-A/1 Page 6 of 7



## LS10-13Dxx series recommended pad

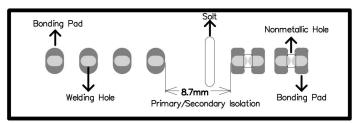

Note: There is a slot(non-metallic hole) between pin 4/5, which the side pad were being cut off. For details, please refer to the recommended dimensions or pad.

#### Note:

- 1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220134;
- 2. External electrolytic capacitors are required to modules, more details refer to typical applications;
- 3. This part is open frame, at least 6.4mm creepage distance between the primary and secondary external components of the module is needed to meet the safety requirement, refer to the recommended welding hole design in the external dimension drawing;
- 4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%, nominal input voltage (115V and 230V) and rated output load;
- 5. All index testing methods in this datasheet are based on our company corporate standards;
- 6. We can provide product customization service, please contact our technicians directly for specific information;
- 7. Products are related to laws and regulations: see "Features" and "EMC";
- 8. If product involves multi-brand materials and there are differences in color etc, please refer to the standards of each manufacturer.
- 9. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

## Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. ChinaTel: 86-20-38601850Fax: 86-20-38601272E-mail: info@mornsun.cnwww.mornsun-power.com

**MORNSUN®** 

#### MORNSUN Guangzhou Science & Technology Co., Ltd.

2022.12.27-A/1 Page 7 of 7